



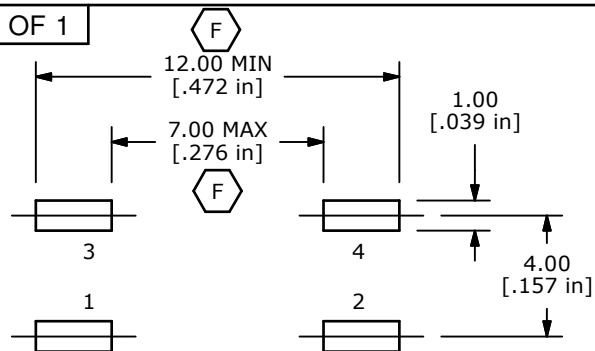





RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
3. TERM. NOS. FOR REF ONLY
4. RATING: 50 MILLI-AMPS @12VDC
5. TRAVEL: $0.25 +0.2/-0.1$ MM
6. CONTACT RESISTANCE: $100m\Omega$ MAX (E)
- ▲ 7. OPERATING FORCE: 160 ± 50 GF
8. PACKAGING: TAPE AND REEL, 1000 PIECES PER REEL
9. LIFE CYCLES: 100,000 ACTUATIONS
10. ▲ DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT
12. OPERATING TEMPERATURE: -20°C TO 70°C
- ▲ 13. CONTACT MATERIAL: SILVER (E)

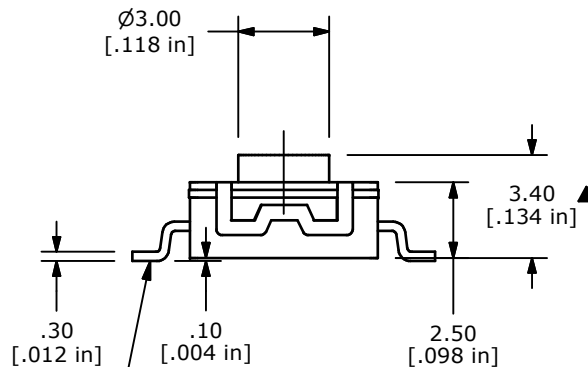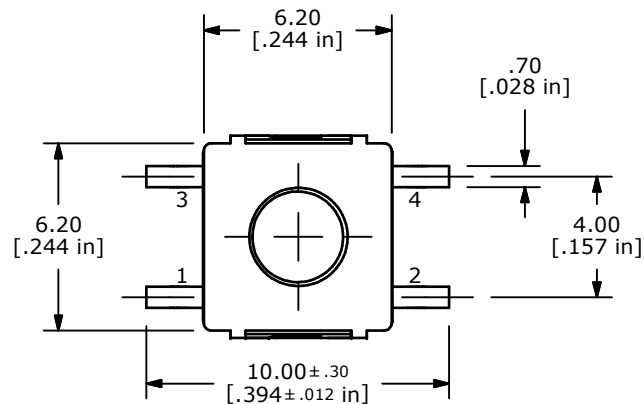

F	21086	12.0 MIN WAS 12.0, 7.0 MAX WAS 5.8	3/27/13	EBP
E	21024	100mΩ WAS 100Ω, ADD SILVER NOTE	2/12/13	EBP
D	20991	REDRAW, ADD TERMINAL COPLANAR	1/29/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL3304AF160QG

SCALE

DATE

1/29/2013

DR

EBP

DWG

P010538

REV

F

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com