


UNCONTROLLED DOCUMENT



| P/N PREFIX/SUFFIX TABLE |   |     |                                  |
|-------------------------|---|-----|----------------------------------|
| LCM-X                   |   | DXX | DESCRIPTION                      |
| STANDARD                | S | SR  | STN, REFLECTIVE                  |
|                         |   | SF  | STN, TRANSFLECTIVE(W/ BACKLIGHT) |
| HIGH TEMP.              | H | TR  | TN, REFLECTIVE                   |
|                         |   | TF  | TN, TRANSFLECTIVE(W/ BACKLIGHT)  |

**CAUTION: STATIC SENSITIVE DEVICE**  
FOLLOW PROPER E.S.D. HANDLING PROCEDURES  
WHEN WORKING WITH THIS PART.

### CHARACTER DETAIL

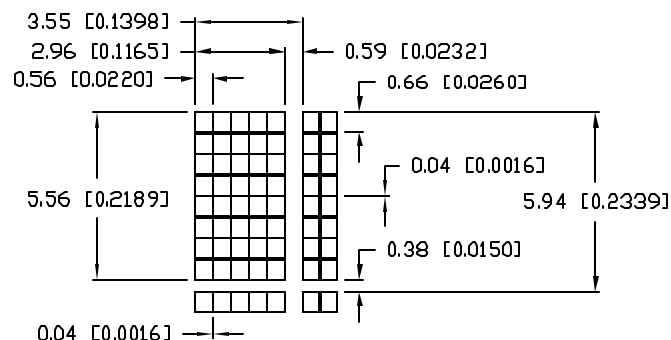

| TYPE           | DIM. | A    | B   |
|----------------|------|------|-----|
| WITH BACKLIGHT |      | 12.7 | 8.8 |
| NO BACKLIGHT   |      | 8.8  | 4.8 |

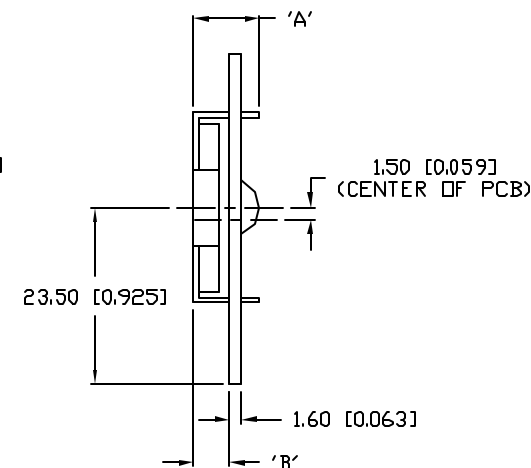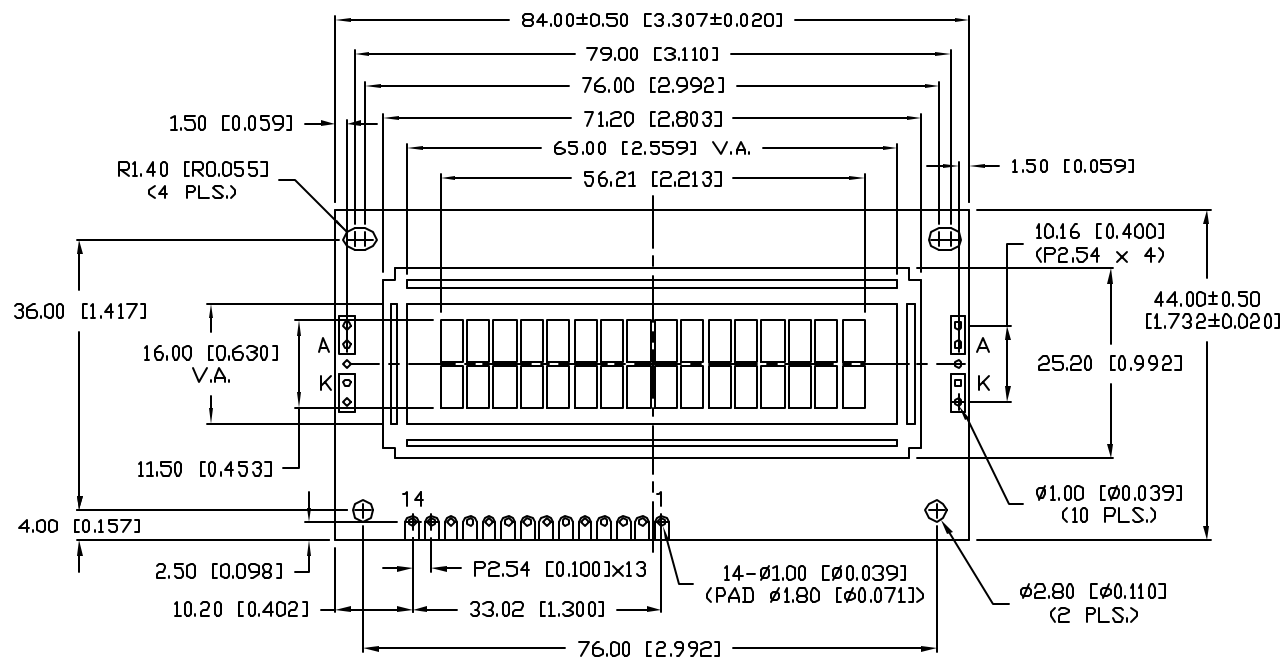

UNCONTROLLED DOCUMENT



\*UNLESS OTHERWISE SPECIFIED TOLERANCE IS  $\pm 0.25\text{mm}$  ( $\pm 0.010"$ )

|                                                                                       |                                |                                                                                                                                                                                                                                                                                                                                                                            |  |                                                                                                                                                                                        |                                                     |
|---------------------------------------------------------------------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| REV.                                                                                  | PART NUMBER<br>LCM-X01602DXX/E | <p><b>CONFIDENTIAL INFORMATION</b></p> <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</p> |  | <p><b>LUMEX</b><br/>INCORPORATED</p> <p>290 E. HELLEN ROAD<br/>PALATINE, ILLINOIS 60067<br/>PHONE: 1-847-359-2790<br/>WEB: <a href="http://WWW.LUMEX.COM">HTTP://WWW.LUMEX.COM</a></p> |                                                     |
| 5.56mm CHARACTER HEIGHT, 5 x 8 DOT MATRIX,<br>16 x 2 LCD MODULE, 1/16 DUTY, 1/5 BIAS. |                                | <p><b>RELIABILITY NOTE</b></p> <p>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.</p>                                                                                                                                                               |  | DRAWN BY:<br><br>SA/DU                                                                                                                                                                 | CHECKED BY:<br><br>                                 |
|                                                                                       |                                |                                                                                                                                                                                                                                                                                                                                                                            |  | APPROVED BY:                                                                                                                                                                           | DATE: 3-34-99<br><br>PAGE: 1 OF 2<br><br>SCALE: N/A |

UNCONTROLLED DOCUMENT

|                 |                                     |      |
|-----------------|-------------------------------------|------|
| PART NUMBER     |                                     | REV. |
| LCM-X01602DXX/E |                                     |      |
| REV.            | E.C.N. NUMBER AND REVISION COMMENTS | DATE |

| PIN CONFIGURATION |                 |        |                                                                 |
|-------------------|-----------------|--------|-----------------------------------------------------------------|
| PIN NO.           | SYMBOL          | LEVEL  | FUNCTION                                                        |
| 1                 | V <sub>SS</sub> | -      | POWER SUPPLY<br>GND (0V)<br>5V<br>FOR LCD DRIVE                 |
| 2                 | V <sub>DD</sub> | -      |                                                                 |
| 3                 | V <sub>O</sub>  | -      |                                                                 |
| 4                 | RS              | H/L    | REGISTER SELECT SIGNAL<br>H: DATA INPUT<br>L: INSTRUCTION INPUT |
| 5                 | R/W             | H/L    | H: DATA READ (MODULE-->MPU)<br>L: DATA WRITE (MODULE<--MPU)     |
| 6                 | E               | H,H->L | ENABLE                                                          |
| 7~14              | DB0~DB7         | H/L    | DATA BUS-SOFTWARE SELECTABLE 4 OR 8 BIT MODE.                   |

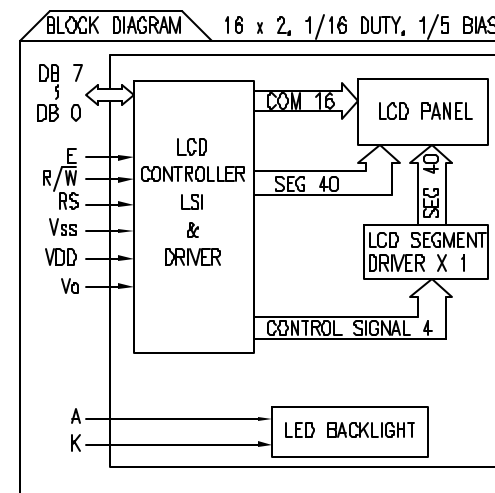

| ELECTRICAL CHARACTERISTICS |                                  | V <sub>DD</sub> =4.7V to 5.3V, T <sub>A</sub> =25°C |                       |      |      |                   |
|----------------------------|----------------------------------|-----------------------------------------------------|-----------------------|------|------|-------------------|
| ITEM                       | SYMBOL                           | CONDITION                                           | STANDARD VALUE        |      |      | UNIT              |
| SUPPLY VOLTAGE FOR LOGIC   | V <sub>DD</sub> -V <sub>SS</sub> | -                                                   | MIN.                  | TYP. | MAX. | V                 |
| SUPPLY CURRENT FOR LOGIC   | I <sub>DD</sub>                  | V <sub>DD</sub> =5V                                 | -                     | 2.0  | 3.0  | mA                |
| INPUT VOLTAGE              | HIGH<br>LOW                      | V <sub>IH</sub>                                     | -                     | 2.2  | -    | V <sub>DD</sub> V |
|                            |                                  | V <sub>IL</sub>                                     | -                     | 0    | -    | 0.6 V             |
| OUTPUT VOLTAGE             | HIGH<br>LOW                      | V <sub>OH</sub>                                     | -                     | 2.4  | -    | V                 |
|                            |                                  | V <sub>OL</sub>                                     | -                     | -    | 0.4  | V                 |
| *LED BACKLIGHT             | VOLTAGE                          | V <sub>F</sub>                                      | I <sub>F</sub> =160mA | -    | 4.2  | 4.6 V             |
|                            | CURRENT                          | I <sub>F</sub>                                      | -                     | -    | 160  | mA                |
|                            | POWER CONSUMPTION                | P <sub>D</sub>                                      | -                     | -    | 656  | mW                |
|                            | LUMINOUS                         | L                                                   | I <sub>F</sub> =160mA | 70   | -    | cd/m <sup>2</sup> |
|                            | COLOR                            | -                                                   | -                     | -    | -    | nm                |

\*ONLY APPLIES TO MODULES WITH BACKLIGHT

| ABSOLUTE MAXIMUM RATINGS     |                                  |                      |                 |                 |      |
|------------------------------|----------------------------------|----------------------|-----------------|-----------------|------|
| ITEM                         | SYMBOL                           | TEST CONDITION       | STANDARD VALUE  |                 | UNIT |
| SUPPLY VOLTAGE FOR LOGIC     | V <sub>DD</sub> -V <sub>SS</sub> | T <sub>a</sub> =25°C | 4.7             | 5.3             | V    |
| SUPPLY VOLTAGE FOR LCD DRIVE | V <sub>DD</sub> -V <sub>O</sub>  | -                    | 4.2@50°C        | 4.8@0°C         | V    |
| INPUT VOLTAGE                | V <sub>I</sub>                   | T <sub>a</sub> =25°C | V <sub>SS</sub> | V <sub>DD</sub> | V    |
| OPERATING TEMPERATURE        | T <sub>opr</sub>                 | LCM-S                | 0               | 50              | °C   |
|                              |                                  | LCM-H                | -20             | 70              | °C   |
|                              |                                  | LCM-S                | -20             | 70              | °C   |
| STORAGE TEMPERATURE          | T <sub>stg</sub>                 | LCM-H                | -30             | 85              | °C   |

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

|                                                                                       |                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                                                                                     |
|---------------------------------------------------------------------------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| REV.                                                                                  | PART NUMBER<br>LCM-X01602DXX/E | <p>CONFIDENTIAL INFORMATION</p> <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</p> <p>RELIABILITY NOTE</p> <p>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.</p> |             | <p><b>LUMEX</b><br/>INCORPORATED</p> <p>290 E. HELLEN ROAD<br/>PALATINE, ILLINOIS 60067<br/>PHONE: 1-847-359-2790<br/>WEB: HTTP://WWW.LUMEX.COM</p> |
| 5.56mm CHARACTER HEIGHT, 5 x 8 DOT MATRIX,<br>16 x 2 LCD MODULE, 1/16 DUTY, 1/5 BIAS. |                                | DRAWN BY:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | CHECKED BY: | APPROVED BY:                                                                                                                                        |
|                                                                                       |                                | SA/DU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             | DATE: 3-24-99<br>PAGE: 2 OF 2<br>SCALE: N/A                                                                                                         |

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)