


**MODEL:** PJ- 041H | **DESCRIPTION:** DC POWER JACK**FEATURES**

- 1.65 mm center pin
- high current 5 A rating
- right angle orientation
- through hole with panel slot

**SPECIFICATIONS**

| parameter                       | conditions/description               | min | typ   | max | units  |
|---------------------------------|--------------------------------------|-----|-------|-----|--------|
| rated input voltage             |                                      |     | 16    |     | Vdc    |
| rated input current             |                                      |     |       | 5.0 | A      |
| contact resistance <sup>1</sup> | between terminal and mating plug     |     |       | 50  | mΩ     |
|                                 | between terminal in a closed circuit |     |       | 30  | mΩ     |
| insulation resistance           | at 500 Vdc                           | 100 |       |     | MΩ     |
| voltage withstand               | at 50/60Hz for 1 minute              |     |       | 500 | Vac    |
| insertion/withdrawal force      |                                      | 0.3 |       | 3   | kg     |
| terminal strength               | any direction for 10 seconds         |     |       | 500 | g      |
| operating temperature           |                                      | -25 |       | 85  | °C     |
| life                            |                                      |     | 5,000 |     | cycles |
| flammability rating             | UL94V-0                              |     |       |     |        |
| RoHS                            | 2011/65/EU                           |     |       |     |        |


Note: 1. When measured at a current of less than 100 mA/1 kHz

**SOLDERABILITY**






| parameter      | conditions/description                  | min | typ | max | units |
|----------------|-----------------------------------------|-----|-----|-----|-------|
| wave soldering | dipped in solder pot for 5 ±0.5 seconds | 255 | 260 | 265 | °C    |

## MECHANICAL DRAWING

units: mm[inches]  
 tolerance:  
 X.X  $\pm 0.2$ mm  
 X.XX  $\pm 0.1$ mm  
 X.XXX  $\pm 0.05$ mm



|            | MATERIAL     | PLATING |
|------------|--------------|---------|
| center pin | brass        | silver  |
| terminal 1 | brass        | silver  |
| terminal 2 | copper alloy | silver  |
| terminal 3 | brass        | silver  |
| plastic    | PA66         |         |

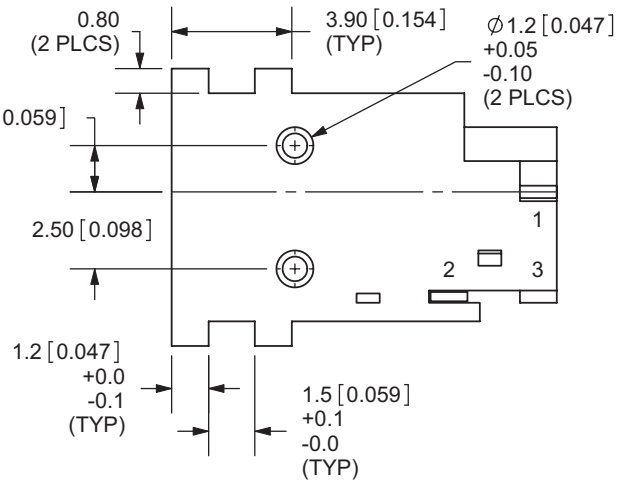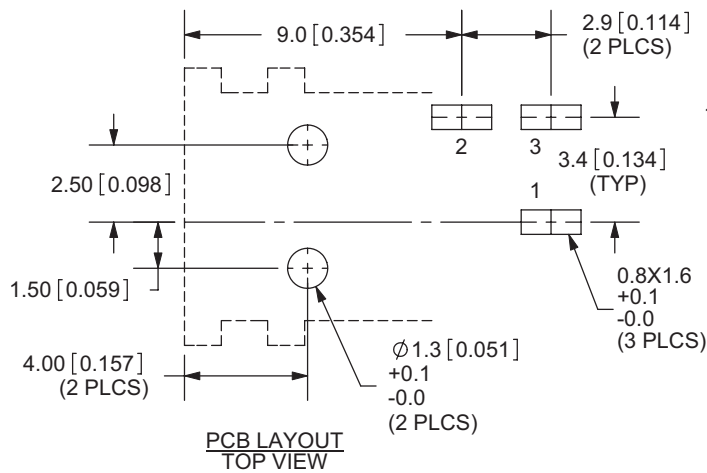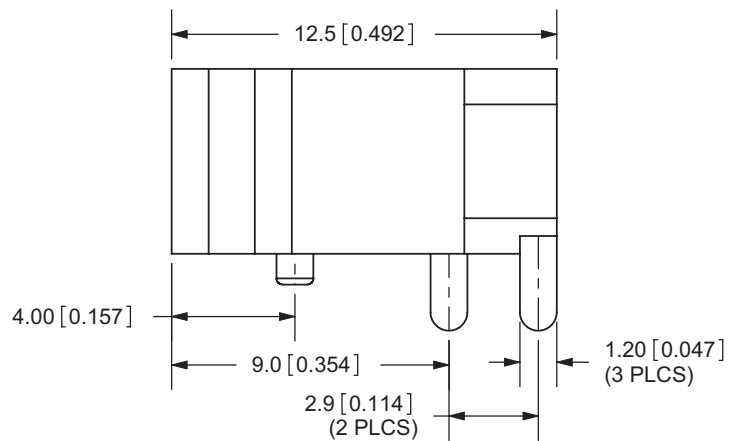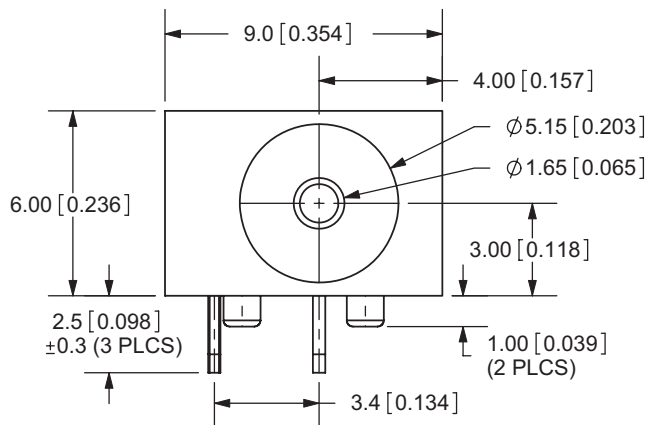

MATING PLUG  
 Jack Insertion Depth: 8.00 mm

|            |          |
|------------|----------|
| SCHEMATIC  |          |
| Model      | PJ-041H  |
| Center Pin | Ø1.65 mm |

## REVISION HISTORY

| rev. | description               | date       |
|------|---------------------------|------------|
| 1.0  | initial release           | 07/30/2007 |
| 1.01 | applied new spec template | 01/14/2015 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC<sup>®</sup>**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email     amall@ameya360.com  
QQ        800077892  
Skype     ameyasales1 ameyasales2

➤ Customer Service :

Email     service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email     mkt@ameya360.com