




FRONT SHELL







INSERTED BODY



REAR SHELL



ASSEMBLED PLUG

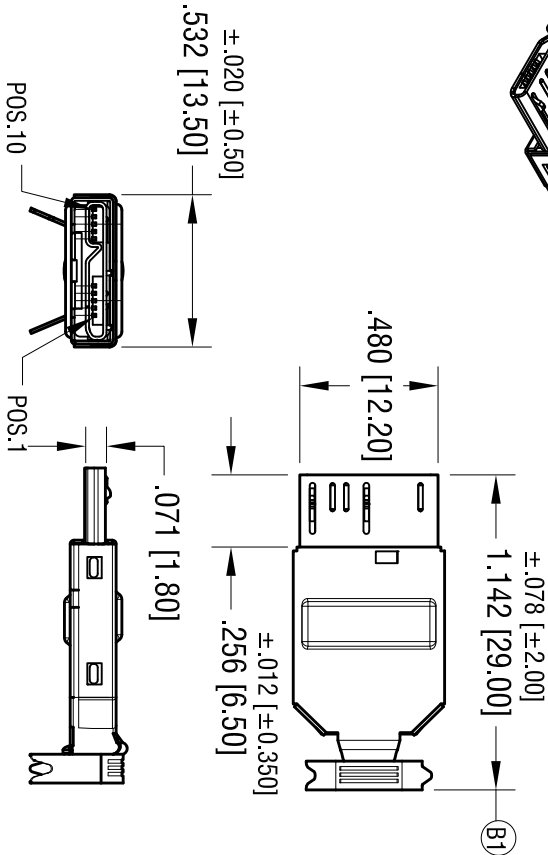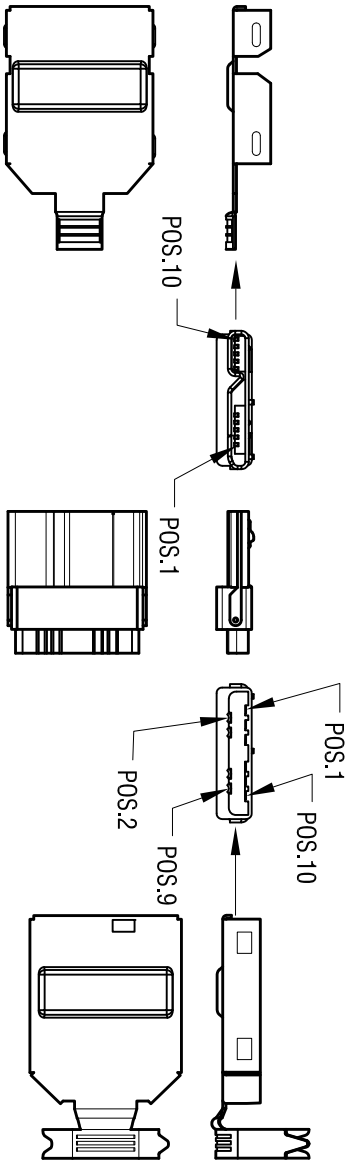

PLUG SPECIFICATIONS:

SHELL: MAT'L- STEEL

FINISH- NICKEL PLATE

CONTACT: MAT'L- PHOSPHOR BRONZE

FINISH- GOLD FLASH OVER NICKEL

INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0

ELECTRICAL CHARACTERISTICS:

RATED VOLTAGE: 30V (RMS)

CONTACT CURRENT RATING: 1.8 Amp DC MAX.

CONTACT RESISTANCE: 50m  $\Omega$  max.

DIELECTRIC WITHSTANDING VOLTAGE: AC 100 V R.M.S.

MECHANICAL CHARACTERISTICS:

OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)

DURABILITY: 1500 CYCLES MIN.

DATE	DESCRIPTION	REV.
6.01.11	CHANGE AS PER ECN 11-076	A
3.26.15	CHANGE AS PER ECN 15-040 B1 WAS 1.008 [25.60]	B

<b>KEYSTONE ELECTRONICS CORP.</b> www.keystecoo.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900				
PART NAME USB 3.0 MICRO PLUG				
MATERIAL AS NOTED				
FINISH AS NOTED		DRN BY NT	DATE 8.11.10	
TOLERANCES DECIMAL ± .010 [± 0.25 ] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED		CODE C	APP'D LN	DWG NO. 957

THIS DOCUMENT IS THE PROPERTY OF  
KEYSTONE ELECTRONICS CORP. AND  
SHALL NOT BE REPRODUCED, DISTRIBUTED  
OR USED AS A BASIS FOR MANUFACTURE  
WITHOUT PRIOR WRITTEN PERMISSION  
FROM KEYSTONE ELECTRONICS CORP.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
Email       amall@ameya360.com  
QQ          800077892  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel          +86 (21) 64016692-8333  
Email       mkt@ameya360.com