

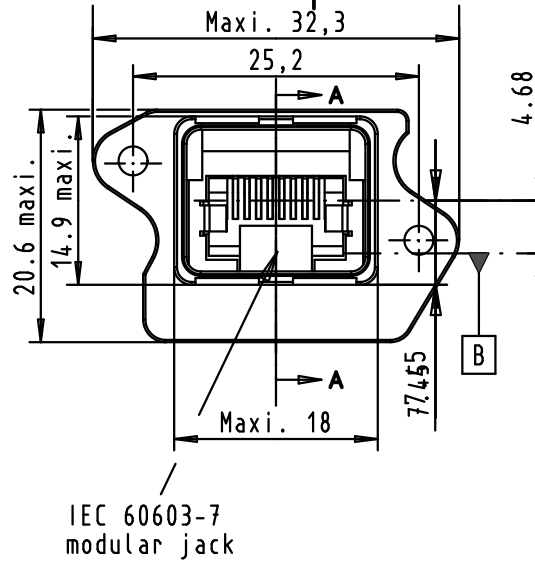


Panel cutting

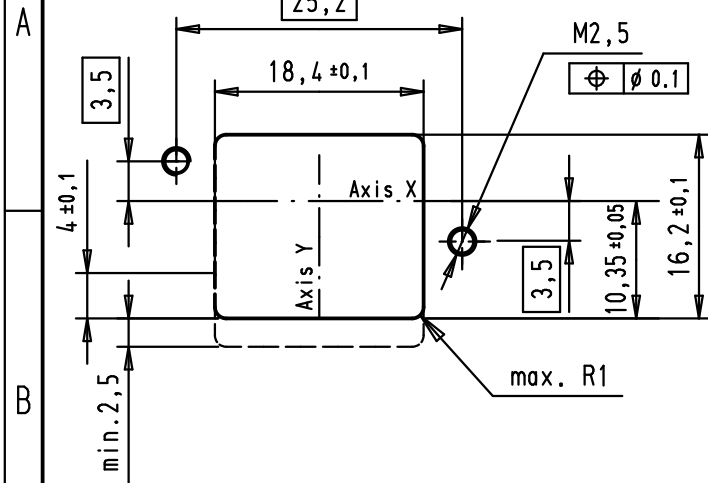

CROSS SECTION A-A

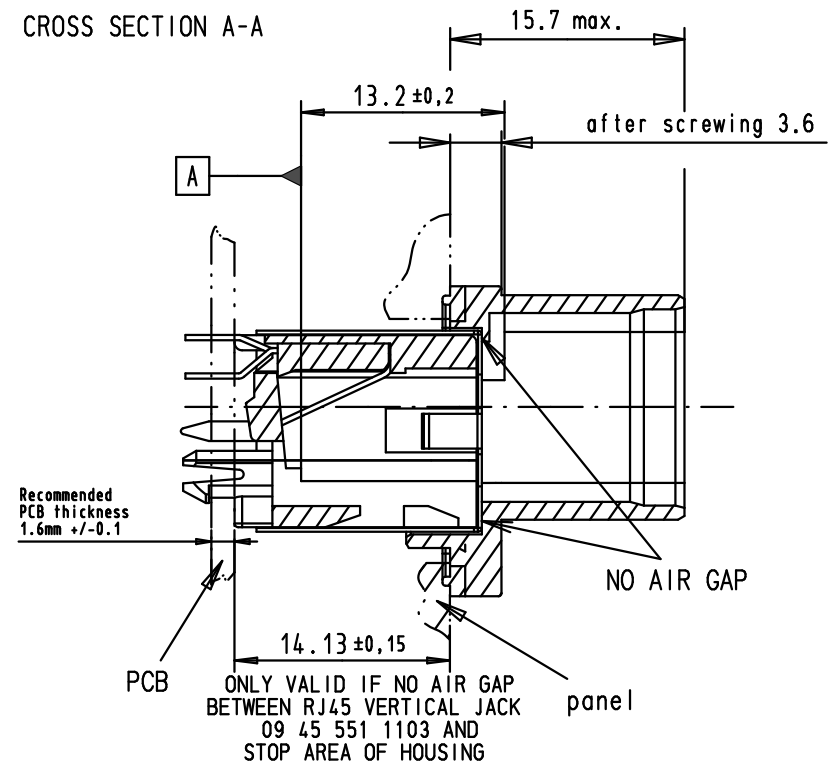

flat seal

Recommended
M2.5 washer
according to
EN ISO 7092

Connector pitches on panel:
Axis X= 27 mm and Axis Y = 21 mm
Receptacle mating face acc. to
600076-3-106 IEC - variant 4

RJ45 jack mating references A and B
according to IEC 60603-7
(1) Screwing torque = 0.3 N.m

Area for Harting jacks

M2.5 screw (1)
according to
DIN 912
or ISO 4762

panel

Mod.	Dot.	Name	Detail.	28/10/08	AB	All Dim. in mm Orig. Size DIN A 4	Push pull RJ Industrial black thermoplastic IP67 receptacle with overmolded seal with position dimensions of Harting vertical jacks P/N 09 45 551 1103	Maßstab/ Scale
35413	17/11/08	AB	Insp.					1,5:1
35400	28/10/08	AB	Stand.					
HARTING EURL F-95972 Paris			TB 09 45 545 00 27			Blatt/ Page 1/1		
			Sub.					

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com