



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART NUMBER *	COLOR	USE WITH THESE CABLE TIE ** CROSS-SECTIONS	WEIGHT LBS (g)/100 pcs
EMS - A	Ⓐ NATURAL	M, I, S	0.55 (250)
EMS - A - O	WEATHER RESISTANT BLACK	M, I, S	0.55 (250)

NOTES:

1. DESIGNED FOR USE WITH EPOXY ADHESIVE
(ADHESIVE NOT INCLUDED WITH EMS-A)
2. MOUNTING INSTRUCTIONS:
 - (A) APPLY ADHESIVE TO PART.
 - (B) APPLY SUFFICIENT PRESSURE TO FORCE
ADHESIVE INTO GROOVES.
 - (C) ALLOW ADHESIVE TO CURE BEFORE APPLYING
LOAD TO MOUNT.
3. FOR PACKAGE SIZE SEE PART NUMBER
SUFFIX DESIGNATION ON CURRENT PRICE
SHEET.
4. CABLE TIE CROSS-SECTION CODE:
M=MINIATURE, I=INTERMEDIATE,
S=STANDARD.

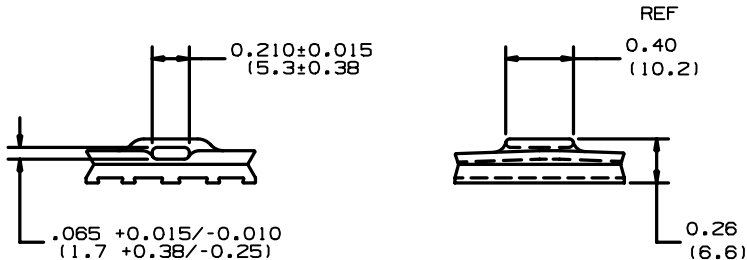

DIMENSIONS IN PARENTHESES ARE IN METRIC.

CAD FILENAME/LAYERS

G00239HZ_PI_EMS_01

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

EMS - A
EPOXY MOUNT, STANDARD

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .XX (.XXX) ± 0.02
(.XX) ± 0.02 ANGLES ± .XX

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY
LGO

MAT'L

DATE 6/22/0

NYLON 6/6

SCALE NONE

DRAWING NO.

GB0239HZ

DATA
A
SIZES

I	6/26/03	LGG		CHG DIM FROM 0.210±0.015/-0.005 TO +/- .015. CHG DIM FROM (5.3±0.38/0.13 TO +/- .38.	GB0239HZ	I			
				CHG DIM FROM 0.065±0.015/-0.005 TO -.010 CHG DIM FROM(1.7±0.38/-0.13 TO -.25					
R	6/22/01	LGG		INITIAL RELEASE REPLACED SS-4810	GB0239HZ	R			
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP		

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com