


# Heyco® RDD Right Angle Lockit™ Strain Relief Bushings

## For Flat Cables

| WILL FIT THESE CABLES |                |                  |            | PANEL DIMENSIONS      |                       |                      |                   | PART NO.    | DESCRIPTION |
|-----------------------|----------------|------------------|------------|-----------------------|-----------------------|----------------------|-------------------|-------------|-------------|
| UL Type Designation   | AWG Conductors | Approximate Size |            | Mounting Hole Size    |                       | Thickness            |                   | Black       |             |
|                       |                | in.              | mm.        | in.                   | mm.                   | in.                  | mm.               |             |             |
| SPT-1                 | 18/2           | .105 x .222      | 2,7 x 5,6  | .625 w/<br>.550 flats | 15,9 w/<br>14,0 flats | .032<br>.040         | 0,8<br>1,1        | <b>1806</b> | RDD 100A-90 |
|                       | 18/3           | .116 x .315      | 2,9 x 8,0  |                       |                       | .048<br>.063<br>.099 | 1,2<br>1,6<br>2,5 |             |             |
| HPN<br>SPT-1<br>SPT-2 | 16/3           | .116 x .315      | 2,9 x 8,0  | .625 w/<br>.550 flats | 15,9 w/<br>14,0 flats | .032<br>.040         | 0,8<br>1,1        | <b>1808</b> | RDD 100-90  |
|                       | 18/2           |                  |            |                       |                       | .048                 | 1,2               |             |             |
|                       | 18/3           | .160 x .300      | 4,1 x 7,6  |                       |                       | .063<br>.099         | 1,6<br>2,5        |             |             |
| HPN<br>SPT-2<br>SPT-3 | 16/3           | .160 x .370      | 4,1 x 7,6  | .875 w/<br>.770 flats | 22,2 w/<br>19,6 flats | .032<br>.063         | 0,8<br>1,6        | <b>1810</b> | RDD 200-90  |
|                       | 18/3           |                  |            |                       |                       | .099                 | 2,5               |             |             |
|                       | 14/2           | .240 x .420      | 6,1 x 10,7 |                       |                       | .126<br>.157         | 3,2<br>4,0        |             |             |

Standard color black. Consult Heyco for white and other colors.

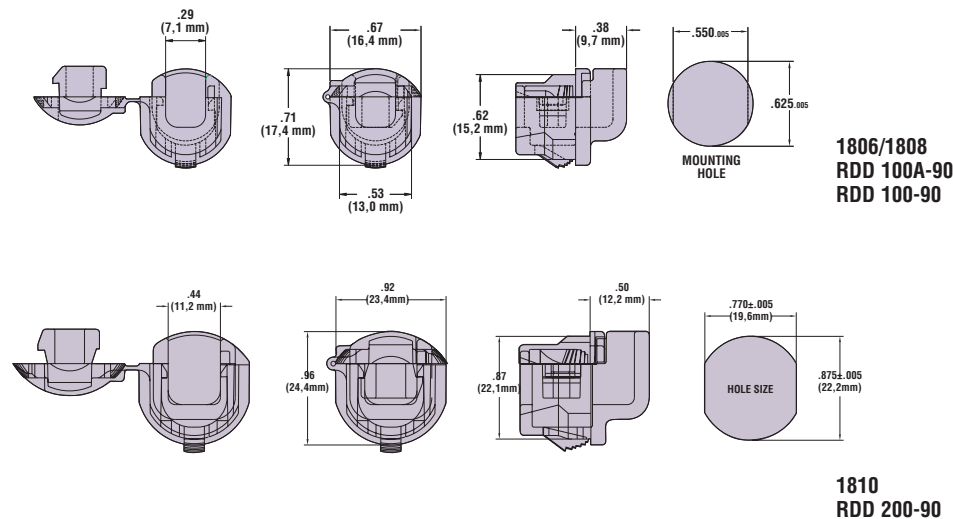

- Automated application equipment speeds assembly and lowers costs while reducing or eliminating repetitive manual assembly motions.
- See page 3-1 for Heyco Automated Pre-Assembly Equipment.
- Installs easily with fingertip pressure into a standard round or Double "D" hole.
- Assembly friendly! Independent of insertion into the panel, RDD Right Angle Lockit Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Multiple panel locking steps secure lockit strain relief into range of panel thicknesses.
- See page 3-23 for matching plugs which can be used to fill blank/unused mounting holes.

|                            |                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Material                   | 6/6 Nylon                                                                                                              |
| Certifications             | Recognized under the Component Program of Underwriters' Laboratories File E15331 (far exceeds UL's 35# pull-out test). |
|                            | SR Certified by the Canadian Standards Association File LR8919                                                         |
| Flammability Rating        | 94V-2                                                                                                                  |
| Material Temperature Index | 257° (125°C)—Maximum temperature on part not to exceed 221°F (105°C)                                                   |

Quick  
Specs

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)