

Series 22

MINIATURE 10 AMP DOUBLE-POLE / SIMULTANEOUS SNAP ACTION SWITCHES

This rugged double-pole double-break Butterfly® mechanism switch can be configured for Form XX, Form YY or Form ZZ switching. This unique design is ideal for your toughest applications where reliability is a must.

APPLICATIONS

- Pressure control sensors
- Pendant controls
- Door openers for transit equipment
- Valve actuator
- Lift trucks
- Interlock kiosk

KEY FEATURES:

- Gold or silver contacts
- UL recognized and CSA certified
- Variety of terminal styles
- Roller lever and overtravel plunger actuator are available



ACTUAL SIZE

ORDERING INFORMATION:

Switches

Part Number	Terminals
22-104	End Solder
22-204	#4 Screw
22-304	Side Solder
22-504	Quick Disconnect .250

Actuator (see page 71 for additional specifications)


Part Number	Oper. Force	Release Force	Pretravel	Overtravel	Movement Diff.	Operating Point
72-1160 Roller Lever (1)	10 oz max	1.5 oz min	.150 max	.035 min	.070 ± .015	1.0 ± .031
72-2080 Over Travel (2)	17 ± 5 oz	4 oz min	.060 max	.215 min	.030 ± .007	.828±.031

(1) When used with 22-104 basic switch or 22-204 basic switch
(2) When used with 22-304 basic switch


STANDARDS / AGENCY / RATINGS:




END SOLDER

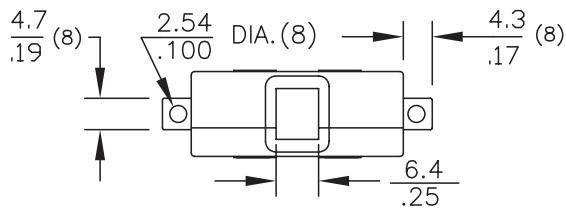


#4 SCREW

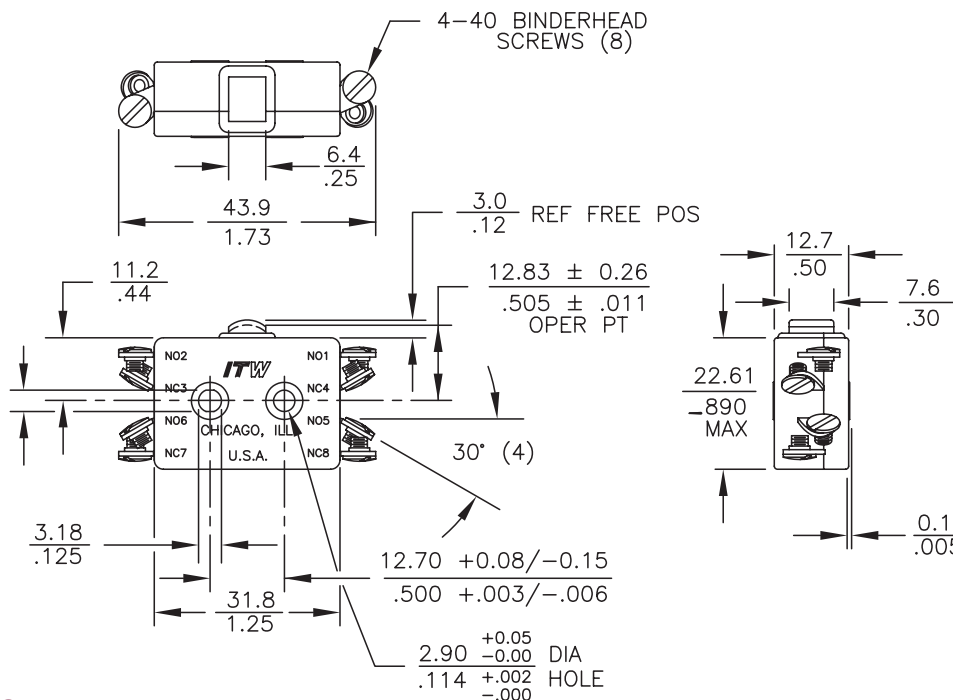

QUICK DISCONNECT

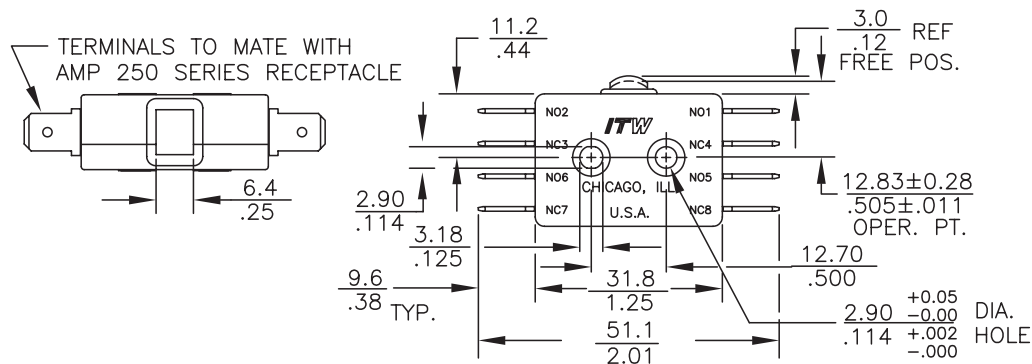

SIDE SOLDER

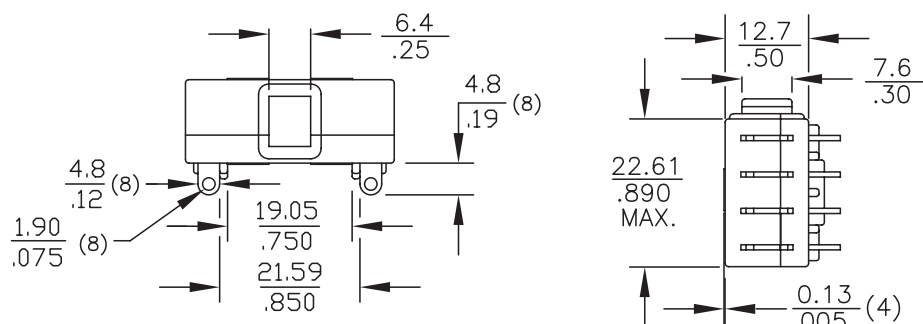

MECHANICAL / ELECTRICAL CHARACTERISTICS:

Pretravel:
0.060 inches max

Overtravel:
0.015 inches min

Operating Force:
17 ± 5 oz

Release Force:
4 oz min

Movement Differential:
0.030 inches ± .009

Operating Point:
0.505 inches ± .011
(from mounting hole centers)

Circuit:
DPDT-DB (Form ZZ)

Electrical Ratings:

Circuitry	125/250 VAC	28 VDC
DPST-DB NO or NC (Form XX or YY)	10 amp (75-80% PF) 1/2 HP 125 VAC	10 amp Ind 15 amp Res
DPDT-DB (Form ZZ)	3/4 HP 250 VAC	7 amp Ind 10 amp Res

- Roller Lever
- Overtravel

Part Number	Oper. Force	Release Force	Pretravel	Overtravel	Movement Diff.	Operating Point
72-1160 Roller Lever (1)	10 oz max	1.5 oz min	.150 max	.035 min	.070 ± .015	1.0 ± .031
72-2080 over travel (2)	17 ± 5 oz	4 oz min	.060 max	.215 min	.030 ± .007	.828 ± .031

(1) When used with 22-104 basic switch or 22-204 basic switch. (2) When used with 22-304 basic switch

Technical drawing of a mechanical part, showing front, side, and top views with dimensions and tolerances.

Front View (Left):

- Overall height: 29.0 ± 1.14
- Overall width: 12.7 ± .50

Side View (Top):

- Overall height: 14.7 ± .58
- Overall width: 12.7 ± .50
- Internal width: 3.2 ± .13
- Internal width: 12.7 ± .50
- Internal width: 31.8 ± 1.25
- Internal width: 4.4 ± .17
- Internal width: 4.4 ± .17

Top View (Right):

- Overall width: 25.4 ± 0.79
- Overall height: 1.00 ± .031 OPER. PT.
- Internal width: 11.1 ± .44
- Internal width: 12.7 ± .50
- Internal width: 31.8 ± 1.25
- Internal width: 4.4 ± .17
- Internal width: 4.4 ± .17

Dimensions and Tolerances:

- 9.52 DIA. X 4.75 .375 DIA. X .187 THK.
- 3.81 MAX. .150 PRETRAVEL
- 21.72 R. .855

15/32-32 HEX NUT

21.03 ± 0.79
.828 ± .031
OPER. PT.

STAINLESS STEEL
INTERNAL TOOTH
LOCKWASHER

17V
CHICAGO, ILL.
U.S.A.

TYPICAL SWITCH APPLICATION
(SWITCH NOT INCLUDED)

71

800.544.3354

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com