



UA7524

LINEAR INTEGRATED CIRCUIT


POWER FACTOR CONTROLLER

DESCRIPTION

The UTC **UA7524** provides the necessary features to implement the Electronic BALLAST control and S.M.P.S application for designing active power factor correction circuit.

FEATURES

- * Internal self-starting
- * Micro power start up mode
- * Included under voltage lockout circuit
- * Internal 2% reference
- * High output current: peak 500mA

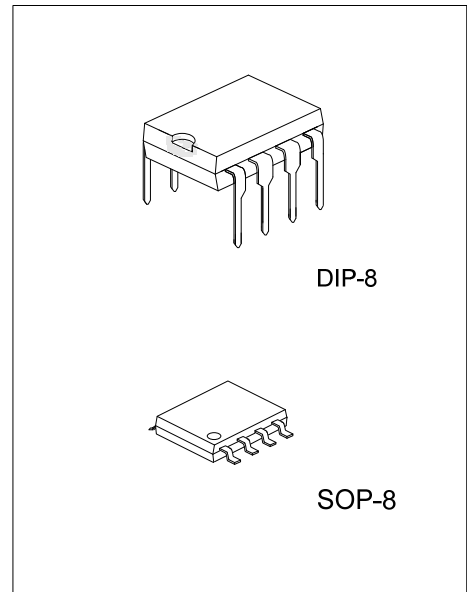

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
UA7524L-D08-T	UA7524G-D08-T	DIP-8	Tube
UA7524L-S08-R	UA7524G-S08-R	SOP-8	Tape Reel

<p>UA7524G-D08-T</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) T: Tube, R: Tape Reel</p> <p>(2) D08: DIP-8, S08: SOP-8</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	---

MARKING

DIP-8	SOP-8
<p>8 7 6 5</p> <p>UTC □□□□ → Date Code</p> <p>UA7524 □ → L: Lead Free</p> <p>□ → G: Halogen Free</p> <p>□ □ → Lot Code</p> <p>1 2 3 4</p>	<p>8 7 6 5</p> <p>UTC □□□□ → Date Code</p> <p>UA7524 □ → L: Lead Free</p> <p>□ → G: Halogen Free</p> <p>□ □ → Lot Code</p> <p>1 2 3 4</p>

■ BLOCK DIAGRAM

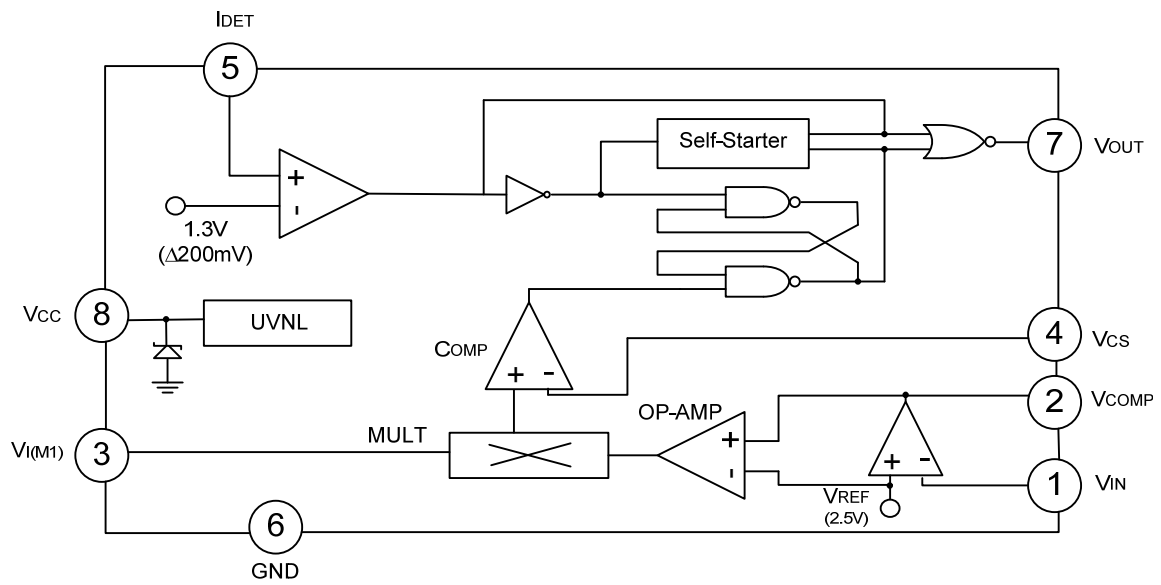

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	20	V
Peak Driver Output Current	I _{O(PEAK)}	500	mA
Detect Clamping Diode Current	I _{DET}	10	mA
Output Clamping Diode Current	I _{O(CD)}	10	mA
Junction Temperature	T _J	+125	°C
Operating Temperature	T _{OPR}	-20 ~ +85	°C
Storage Temperature	T _{STG}	-40 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

(T_A=25°C, All voltage referenced to GND, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Under Voltage Lockout Section						
Start Threshold Voltage	V _{THR(ST)}		9.2	10	10.8	V
UV lockout Hysteresis	V _{HYS(UV)}		1.8	2.0	2.2	V
Supply Zener Voltage	V _Z			17		V
SUPPLY CURRENT SECTION						
Start-up Supply Current	I _{START}	V _{CC} <V _{I(THR)}		0.25	0.5	mA
Operating Supply Current	I _{CC}	V _{CC} =12V, No load		6	12	mA
Dynamic Operating Current	I _{CC(D)}	V _{CC} =12V, f=50KHZ, C _{GS} =1000pF		10	20	mA
REFERENCE SECTION (Note 1)						
Reference Voltage	V _{REF}		2.45	2.5	2.55	V
Line Regulation	ΔV _{OUT}	12V<V _{CC} <16V		0.1	10	mV
Load Regulation	ΔV _{OUT}	0<I _{REF} <2mA		0.1	10	mV
Temperature Stability	ST _T			20		mV
ERROR AMPLIFIER SECTION						
Input Offset Voltage	V _{I(OFF)}		-15		15	mV
Input Bias Current	I _{I(BIAS)}		-1	-0.1	1	μA
Large Signal Open Loop gain	G _V		60	100		dB
Power Supply Rejection Ratio	RR		60	86		dB
Output Current	I _{SOURCE}		2			mA
	I _{SINK}				-2	mA
Output Voltage range	V _{O(P)}		1.2		4	V
Unity Gain Bandwidth	UB _W			1.0		MHZ
Phase Margin	MPH			57		°C
MULTIPLIER SECTION						
M1 Input Voltage Range	V _{I(M1)}		0		2	V
M2 Input Voltage Range	V _{I(M2)}		V _{REF}		V _{REF} +1	V
Input Bias Current	I _{I(BIAS)}		-2	-0.5	2	μA
Multiplier Gain (Note2)	G _V	V _{I(M1)} =0.5V, V _{I(M2)} =3V		0.8		/V
Multiplier Gain Stability	ST _T			-0.2		%/°C
CURRENT DETECT SECTION						
Input Voltage Threshold	V _{I(THR)}		1.0	1.3	1.6	V
Hysteresis	V _{HYS}			200		mV
Input Low Clamp Voltage	V _{IC(L)}	I _{DET} =0mA			0.95	V
Input High Clamp Voltage	V _{IC(H)}	I _{DET} =3mA	6.1	7.1		V
Input Current	I _{IN}	0.8V<V _{DET} <6V		5		μA
Input Clamp Diode Current	I _{I(CD)}	V _{DET} <0.9V, V _{DET} >6V			3	mA


■ ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OUTPUT SECTION						
Output Voltage(High)	$V_{O(H)}$	$I_{OUT}=-10mA, V_{CC}=12V$	7	9		V
Output Voltage(low)	$V_{O(L)}$	$I_{OUT} =10mA, V_{CC}=12V$		0.8	1.8	V
Rising Time	t_R	$C_L=1000pF$		100	200	ns
Falling Time	t_F	$C_L=1000pF$		90	200	ns
SELF-START SECTION						
Self Starting Time	t_{SS}		12			μs

Notes: 1. Reference can not be tested on the PKG

2. $G_V = V_{O(M)} / (V_{I(M1)} * (V_{I(M2)} - V_{REF}))$

APPLICATION CIRCUIT

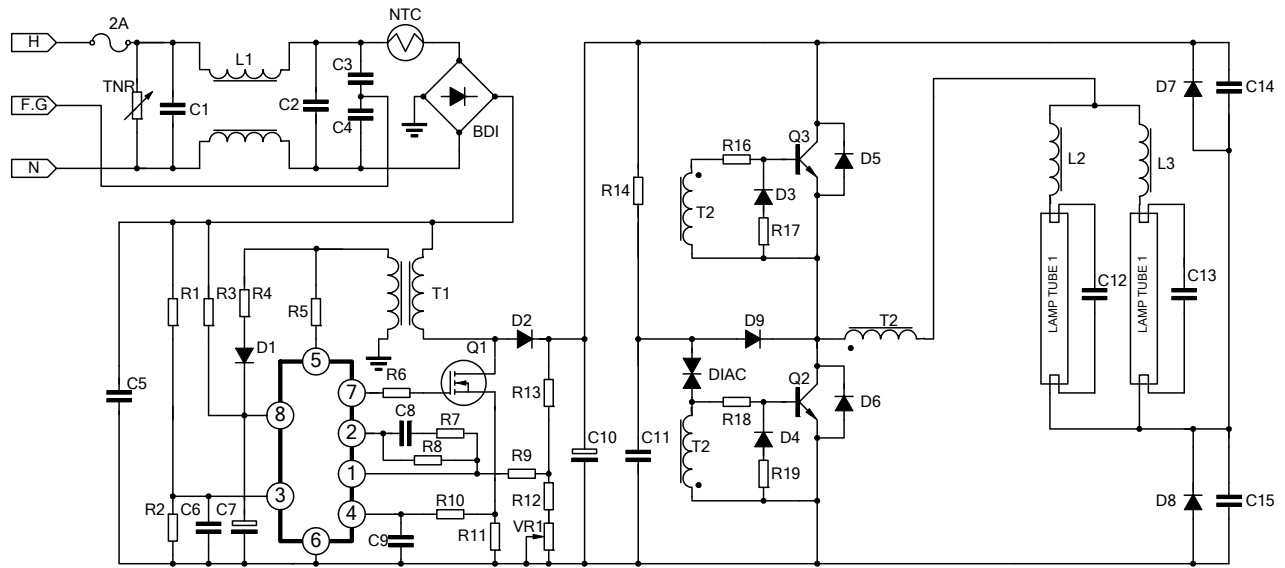

PART LIST

RESISTOR	CAPACITOR	SEMICONDUCTOR	MAGNETICS
R1	C1	IC1	T1
1.8M	0.1 μ F	UTC UA7524	E1-25(PC30):P=70T,S=4T,Gap=0.5mm
R2	C2	Q1	T2
10K	0.1 μ F	IRF830	D15(GP-5):P=3T,S=13T
R3	C3	Q2	L1
100K	4700pF	2SC5039	EE-25(Iron Power),80mH
R4	C4	Q3	L2
3.3 Ω	4700pF	2SC5039	E1-25(PC30):150T,Gap=0.4mm
R5	C5	D1	
22K	0.1 μ F	1N4004	
R7	C6	D2	
2.2K	0.01 μ F	1N4937	
R8	C7	D3	
2.2M	100 μ F	1N4148	
R9	C8	D4	
150K	0.1 μ F	1N4148	
R10	C9	D5	
330 Ω	3300pF	FR107	
R11	C10	D6	
0.75 Ω	47 μ F/450V	FR107	
R12	C11	D7	
5.1K	0.1 μ F	FR107	
R13	C12	D8	
1M	3300pF	FR107	
R14	C13	BD1	
390K	3300pF	PBP204	
R15	C14	TNR	
3.9M	0.01 μ F	12G471	
R16	C15	DIAC	
5.1 Ω	0.01 μ F	32V	
R17			
27 Ω			
R18			
5.1 Ω			
R19			
27 Ω			
VR1			
5K			
NTC			
10 Ω			

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.