
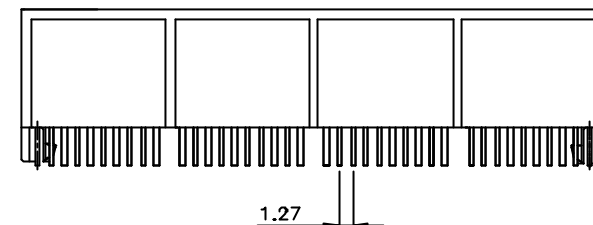
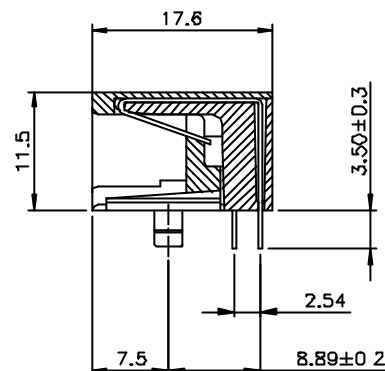


A1RFRD10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHK

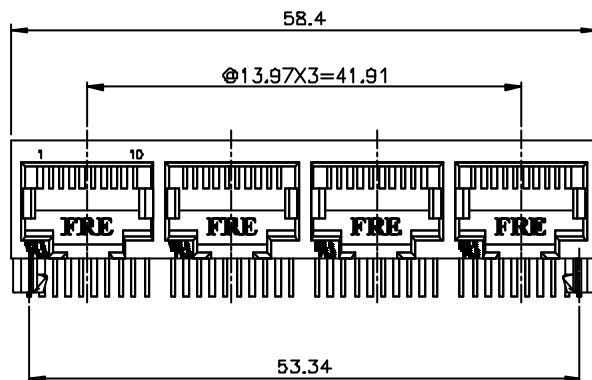

NOTES:

NOTES:
ELECTRICAL.

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS
MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL 94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46MM
3. PLATING: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE. 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN
6. PCB RETENTION POST-SOLDER. 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191


PART NUMBER: E560X-00C06X

NO. OF CONTACT

8-8 CONTACTS

1- 10 CONTACTS

—1— 3u" 2— 6u" 3—15u"
4—30u" 5—50u" 6—Pd20u"

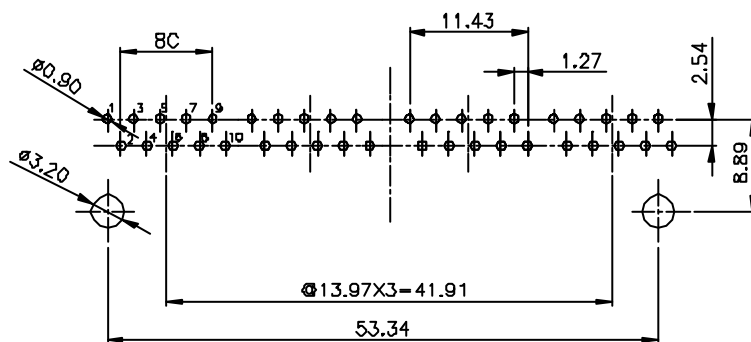

PCB Layout t=1.6MM

Component Side Shown

DETACHED LETTERS	 THIRD ANGLE PROJECTION		DFTO RIK DATE 12/23/03' CHKD MING-WEI DATE 12/23/03' MFD LWJ DATE 12/23/03' APPLY YUAN DATE 12/23/03'		FULL RISE ELECTRONIC CO., LTD TITLE 11.5 SIDE ENTRY PCB GANG JACK 10P	
	TOLERANCES UNLESS NOTED NM .00 ± .02 ± .00 ± .015 ± .000 ± .075 ±		MATERIAL : QT'Y :			
	ANGLES ± 0.5		DRAWING NO. GE563A88 SIZE A3 REV 0 /PART NO. SEE NOTE			
	SCALE : 2:1		DO NOT SCALE DRAWING			
			SHEET 1 OF 1			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com