
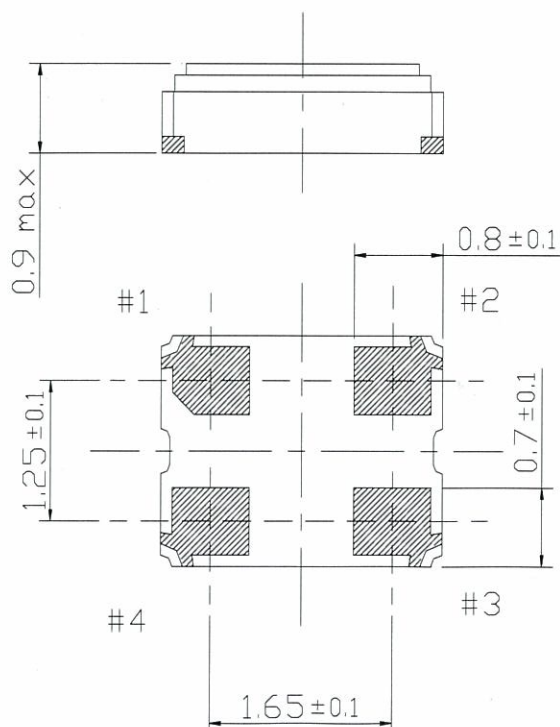


1.	NDK PART NUMBER	NZ2520SB
5.	OutputLevel	C-MOS
5.1	OUTPUT FREQUENCY	*ATTACHED 1
5.2	SUPPLY VOLTAGE	3.0V
5.3	CURRENT CONSUMPTION	*ATTACHED 1
5.5	OPERATING TEMP. RANGE	-10 ~ +60°C
5.6	STORAGE TEMP. RANGE	-55 ~ +125°C
5.7	Fanout(gate) CL	15pF
6.1	FREQUENCY STABILITY	±30 ppm
6.1.2	Vol max/Voh min	0.1Vdd/0.9Vdd
6.1.3	Tr max/Tf max (ns)	5/5 (0.1Vdd ~ 0.9Vdd)
6.1.4	Duty Cycle (%)	45 ~ 55
6.2	Start-up Time (ms)	4 (max)
6.2.1	Stand-by Function Tri-state	Yes

7 DIMENSION

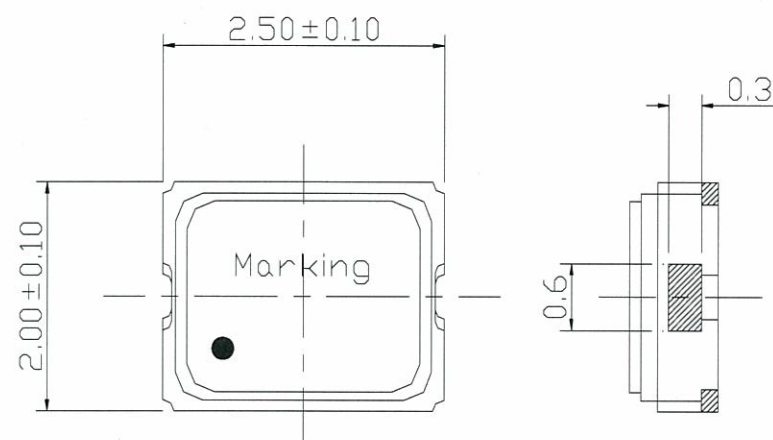

PAD	CONNECTION
#1	STAND BY
#2	GND
#3	OUT PUT
#4	VDD

1 FREQUENCY LIST

1.5MHz, 1.625MHz, 2MHz, 2.4MHz, 2.5MHz, 2.75MHz, 3MHz, 3.25MHz, 4MHz, 4.8MHz, 5MHz,
6MHz, 6.5MHz, 7.6MHz, 8MHz, 9.6MHz, 10MHz, 12MHz, 13MHz, 16MHz, 19.2MHz, 20MHz,
22MHz, 24MHz, 25.6MHz, 26MHz, 32MHz, 38.4MHz, 38.9MHz, 40MHz, 41.36MHz, 44MHz
45.1584MHz, 48MHz, 49.152MHz, 51.2MHz, 54MHz

5 CURRENT CONSUMPTION

5.1	Frequency(MHz)	Consumption
5.2	$1.5 \leq F < 10$	3.5 MAX
5.3	$10 \leq F < 20$	4.5 MAX
5.4	$20 \leq F < 30$	5.0 MAX
5.5	$30 \leq F < 40$	5.5 MAX
5.6	$40 \leq F < 50$	6.0 MAX
5.7	$50 \leq F < 60$	6.5 MAX

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com