

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

5.0 AMP CURRENT SENSOR

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CATALOG LISTING
CSD1EC
PAGE 1 OF 1

3
ISSUE

REVISIONS	
A	CO-95704
DLM 13 MAR 00	

--	--

--	--

$$\begin{array}{c} \vdots \\ \vdots \\ \vdots \end{array} \quad \left| \quad \begin{array}{c} z \\ \vdots \\ \vdots \\ \vdots \end{array} \right.$$

FD

RELEASE NO. DR-3709-2

0R-3709-2

CHECK

CHEN Y

88

MA

[illegible]

5



3EH3

300



23

M

1



SUGGESTED HOLE CENTERS
SCALE 2:1
COMPONENT SIDE

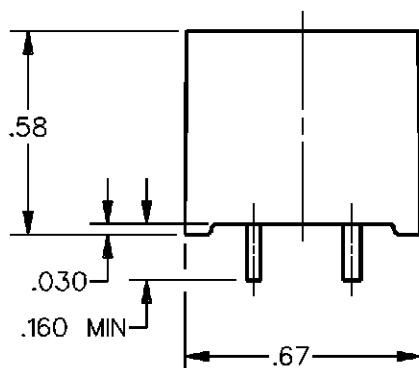

CHARACTERISTICS	
SUPPLY VOLTAGE	4.5 TO 24 VOLTS
SUPPLY CURRENT	22mA MAX, 16mA TYP
TEMPERATURE	-25 TO 85°C
CURRENT: OPERATING	5.0 AMPS±5% (25°C)
RELEASE	3.8 AMPS MIN (25°C)
MAX CONTINUOUS	20 AMPS
OUTPUT CURRENT	40mA MAX SINK
V _{sat}	.4 VOLTS MAX
RESISTANCE	5 mΩ
INDUCTANCE	4 μH

NOTE
1 - ELECTRICAL CONNECTIONS INDICATED ON
BOTTOM OF DEVICE



THIRD ANGLE PROJECTION		
SCALE	2:1	DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT		

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com