



FEATURES


- Rapid prototyping of 2-port circuits
- Compatible with all MB series boards
- SMA female connectors
- Ground terminal and bias feed-through
- Cover and mounting hardware provided

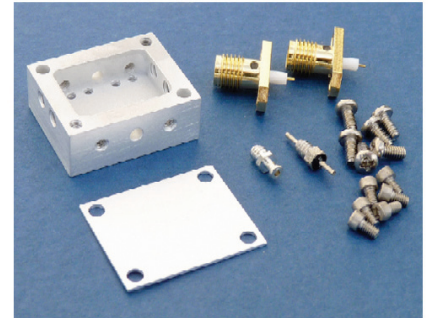


The MicroAmp MH-1 housing will accommodate a single MB series circuit board to create a completely shielded 2-port circuit. Boards are available for microwave amplifiers, filters, log detectors, frequency multipliers, dividers, and operational amplifiers. After assembling the desired MB circuit board, simply drop the board into the housing cavity and screw the board in place using the supplied #1-72 socket head cap screws. Then insert the SMA connectors into the side walls and secure them with the supplied #2-56 mounting screws and solder the center pins to the circuit board pads. The ground turret terminal and bias feed-through are then installed into the housing side wall and the bias connection is soldered in place from the circuit board to the feed-through pin using a small gauge wire. A cover attaches to the top of the housing with #2-56 screws to complete the shielded assembly. The finished housing can be mounted to a baseplate using the corner through holes.

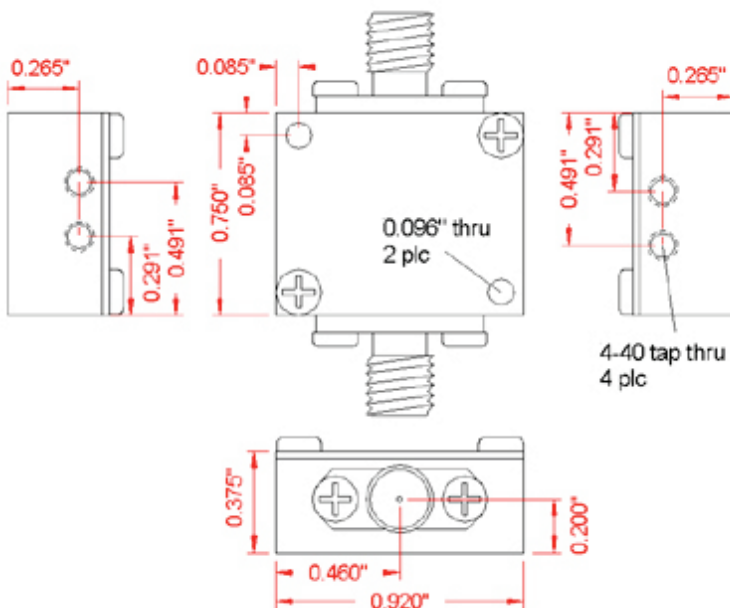


OUTLINE DRAWING




1. Select Circuit Board



2. Assemble Board



3. Install into Housing



4. Add Connectors and Bias

MH-1 KIT CONTENTS

- 1 ea. Housing
- 1 ea. Cover
- 2 ea. SMA female connectors
- 1 ea. Feed-through bias pin
- 1 ea. Ground turret terminal
- 6 ea. #2-56 x 3/16" pan head screws
- 6 ea. #1-72 x 1/8" socket head cap screws

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com