

CMT908K

Description:

This kit contains representative samples of our high frequency Common Mode Inductors. They are useful for a variety of developmental needs including circuit simulation, circuit testing, prototyping and agency evaluations. All items in this kit meet specifications listed in the catalog section referring to the product. This kit is housed in an easy to see, easy to store clear polycarbonate box with a convenient snap closing hinged lid.

Electrical Specifications (@25C):

Part No.	Inductance mH min.	Amps R.M.S	Max. DC Resistance	Min. Leakage
CMT908-V1	2.0	7.50	0.020 Ω	25.0μH
CMT908-V2	4.0	5.20	0.040 Ω	45.0μH
CMT908-V3	8.0	3.20	0.120 Ω	90.0μH
CMT908-V4	16.0	2.60	0.160 Ω	180.0μH
CMT908-H1	2.0	7.50	0.020 Ω	25.0μH
CMT908-H2	4.0	5.20	0.040 Ω	45.0μH
CMT908-H3	8.0	3.20	0.120 Ω	90.0μH
CMT908-H4	16.0	2.60	0.160 Ω	180.0μH

Dimensions:

Height = 1.5"

Width = 4.5"


Length = 8.5"

Weight = 1.0 Lbs.

For more detailed specifications on individual parts, click on the part number or visit us at: www.TriadMagnetics.com

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

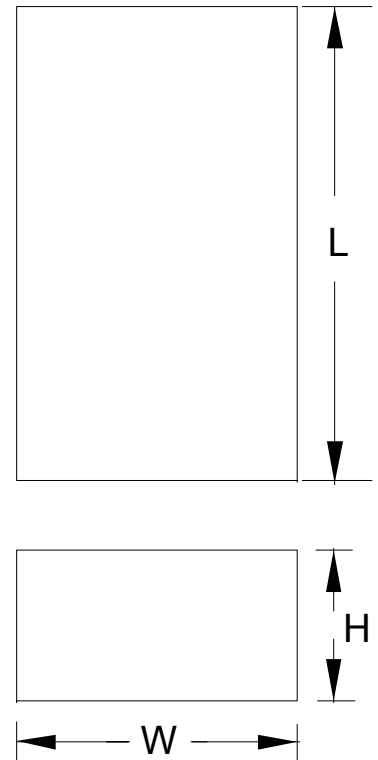

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com