


Multilayer Chip Diplexers

For EGSM & AGSM/PCS Tx-Rx-GPS


Conformity to RoHS Directive

DPX Series DPX161576DT-8011B1

SHAPES AND DIMENSIONS

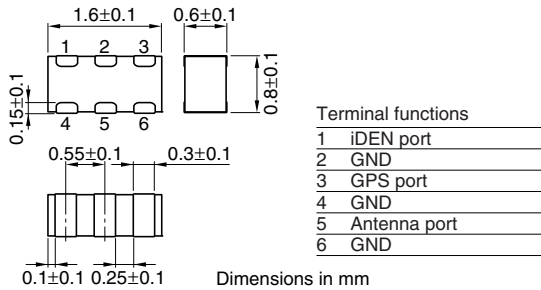

RECOMMENDED PC BOARD PATTERNS

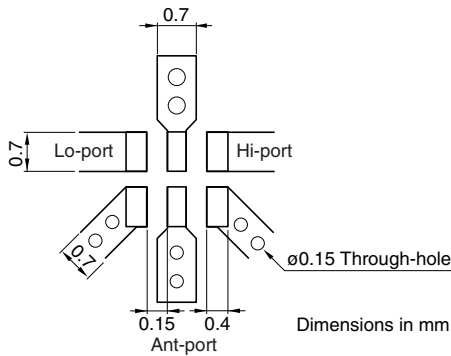

This width is 50Ω.

Micro-strip line for 0.4mm thick glass-epoxy substrate.

ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
iDEN port to Ant port					
iDEN pass band		MHz	806	—	941
Insertion loss	[25°C]	dB	—	—	0.6
	[−30 to +85°C]	dB	—	—	0.7
iDEN port return loss		dB	14	—	—
Ant port return loss		dB	14	—	—
Attenuation	1575MHz	dB	16	—	—
	1612 to 1648MHz	dB	18	—	—
	1792 to 1856MHz	dB	14	—	—
	2 to 3GHz	dB	5	—	—
GPS port to Ant port					
GPS pass band		MHz	1574.42	—	1576.42
Insertion loss	[25°C]	dB	—	—	0.7
	[−30 to +85°C]	dB	—	—	0.8
GPS port return loss		dB	14	—	—
Ant port return loss		dB	14	—	—
Attenuation	806 to 928MHz	dB	20	—	—
GPS port to iDEN port					
Low band attenuation	806 to 928MHz	dB	20	—	—
Attenuation	1575MHz	dB	16	—	—
High band attenuation	1612 to 1648MHz	dB	18	—	—
	1792 to 1856MHz	dB	14	—	—


• Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


Lo-BAND PORT S21

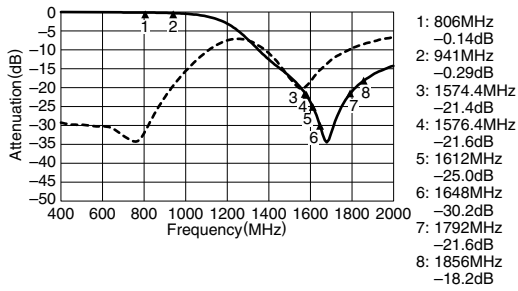


Hi-BAND PORT S31

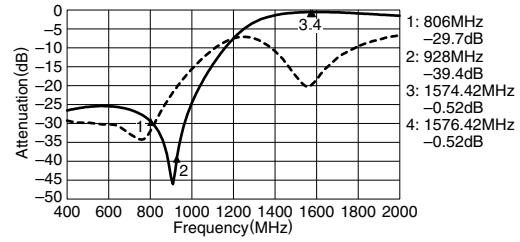


COMMON PORT RETURN LOSS S11

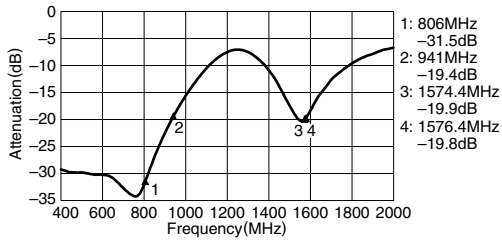


ISOLATION S23

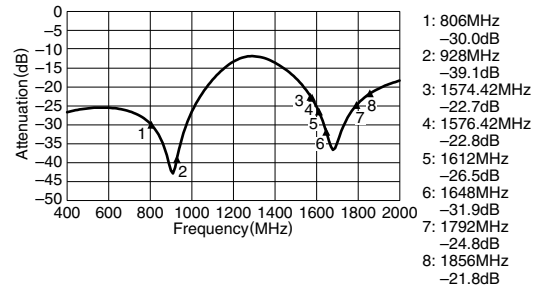


Lo-BAND PORT RETURN LOSS S22

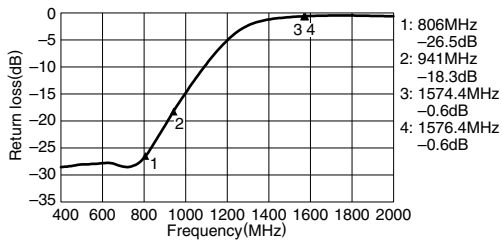


Hi-PORT RETURN LOSS S33

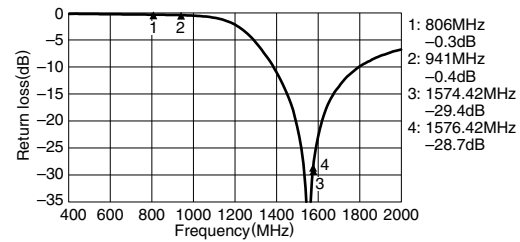


SMITH CHARTS




S11




S22



S33



S21



S31

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com