




TinkerKit Mosfet Module

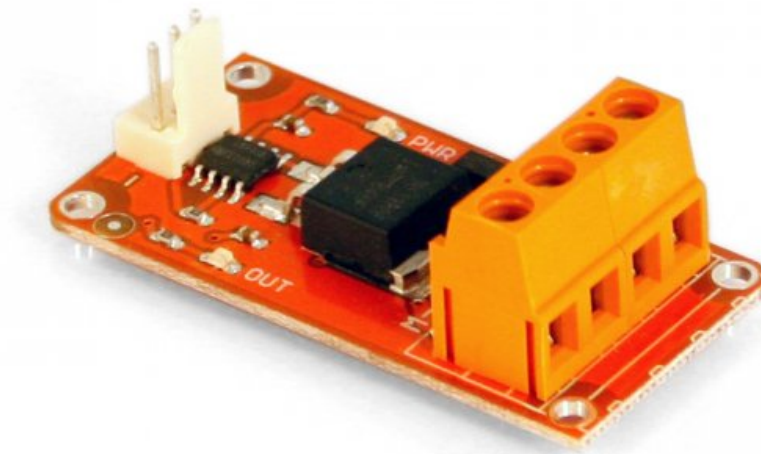

Overview

This module switches a high current load using a high power transistor. Unlike a mechanical relay, this is capable of high speed switching for use with PWM.

Input: This module lets you control devices operating at a maximum of 24VDC with an Arduino pin. To wire the module, connect the power supply for your device (max 24 V) to the V+ and GND terminals. Connect the device to M+ and M-. Be aware of your circuit's polarity, you could damage your components if it is not wired correctly.

Module Description: This module features an IRF520 power MOSFET transistor, a kick-back diode, a standard TinkerKit 3pin connector, a signal amplifier, a green LED that signals that the module is correctly powered and one yellow LED whose brightness depends on the input signal received by the module.

This module is a **ACTUATOR**. The connector is an **INPUT** that must be connected to an **OUTPUT** on the **TinkerKit Shield**.

Code Example

```
/*  
based on Blink, Arduino's "Hello World!"  
Turns on a transistor on for one second, then off for one second,  
repeatedly.  
The MOSFET is on 01  
  
modified 15 jan 2011  
by Scott Fitzgerald  
  
This example code is in the public domain.  
*/
```

```
#define 00 11  
#define 01 10  
#define 02 9  
#define 03 6  
#define 04 5  
#define 05 3  
#define I0 A0  
#define I1 A1  
#define I2 A2  
#define I3 A3  
#define I4 A4  
#define I5 A5
```

```
void setup() {  
  // initialize the digital pin as an output.  
  pinMode(01, OUTPUT);  
}
```

```
void loop() {  
  digitalWrite(01, HIGH); // turn the MOSFET on  
  delay(1000); // wait for a second  
  digitalWrite(01, LOW); // turn the transistor off  
  delay(1000); // wait for a second  
}
```

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com