

SINGLE-SUPPLY DUAL COMPARATOR

■ GENERAL DESCRIPTION

The NJM2407 is a single-supply dual comparator packaged in VSP8. Its input stage of darlington PNP detects GND level.

The common-emitter output circuit performs low output saturation voltage less than 400mV at output sink current 3mA.

■ PACKAGE OUTLINE



NJM2407R




NJM2407RB1

■ FEATURES

- Operating Voltage ($V^+ = +2V \sim +20V$)
- Output Sink Current (6mA min.)
- Response Time (0.8 μ s typ.)
- Bipolar Technology
- Package Outline VSP8, TVSP8


■ PIN CONFIGURATION



PIN FUNCTION

- 1. A OUTPUT
- 2. A -INPUT
- 3. A +INPUT
- 4. GND
- 5. B +INPUT
- 6. B -INPUT
- 7. B OUTPUT
- 8. V^+

■ EQUIVALENT CIRCUIT (1/2 Shown)

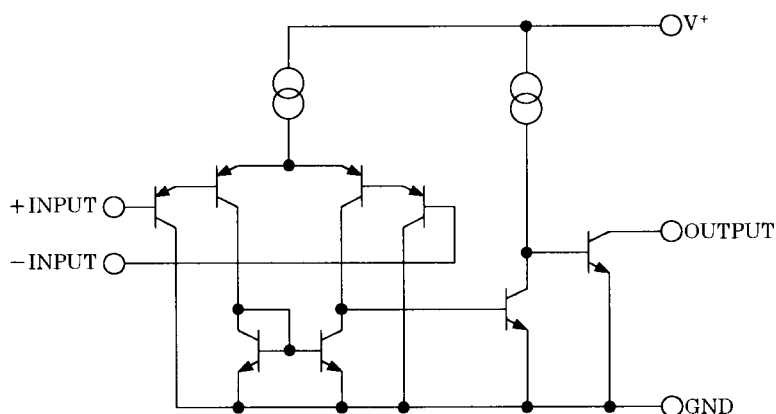

NJM2407

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+ (V^-)$	20 (±10)	V
Differential Input Voltage	V_{ID}	± 20	V
Input Voltage	V_{IN}	-0.3~+20 (note)	V
Power Dissipation	P_D	320	mW
Operating Temperature Range	T_{opr}	-40~+85	°C
Storage Temperature Range	T_{stg}	-50~+125	°C







(note) When the supply voltage is less than +20V, the absolute maximum input is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS


($V^+=5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	$R_S=0\Omega, V_O=1.4V$	-	2	7	mV
Input Offset Current	I_{IO}		-	5	50	nA
Input Bias Current	I_B		-	25	250	nA
Large Signal Voltage Gain	A_V	$R_L=15k\Omega$	-	106	-	dB
Input Common Mode Voltage Range	V_{ICM}		0~3.5	-	-	V
Response Time	t_R	$R_L=5.1k\Omega$	-	0.8	-	µs
Output Sink Current	I_{SINK}	$V_{IN}=1V, V_{IN}^+=0V, V_O=1.5V$	6	16	-	mA
Output Saturation Voltage	V_{SAT}	$V_{IN}=1V, V_{IN}^+=0V, I_{SINK}=3mA$	-	200	400	mV
Output Leakage Current	I_{LEAK}	$V_{IN}=0V, V_{IN}^+=1V, V_O=5V$	-	-	1.0	µA
Operating Current	I_{CC}	$R_L=\infty$	-	0.4	1	mA

■ TYPICAL CHARACTERISTICS

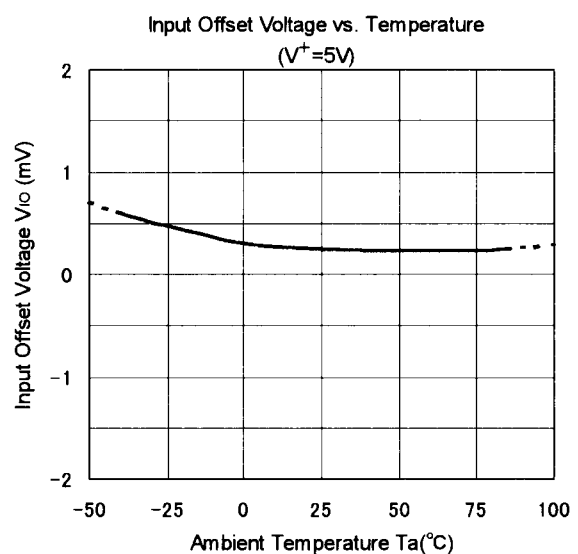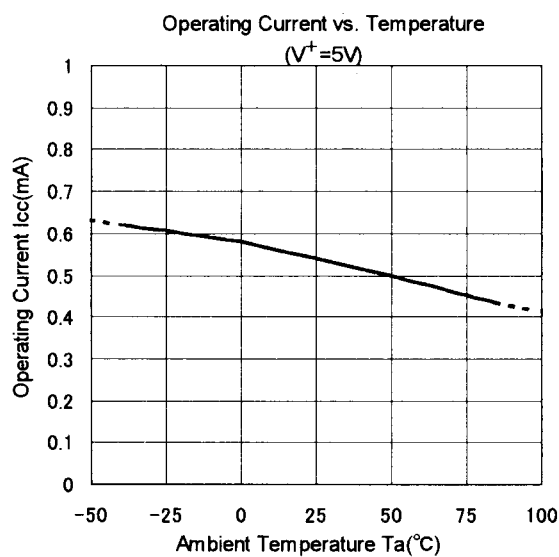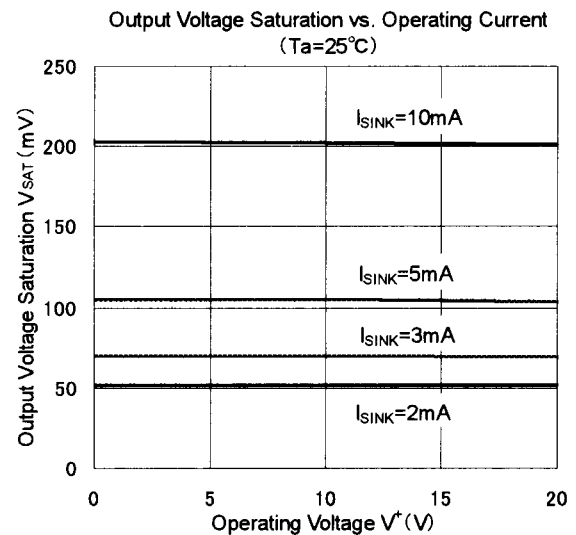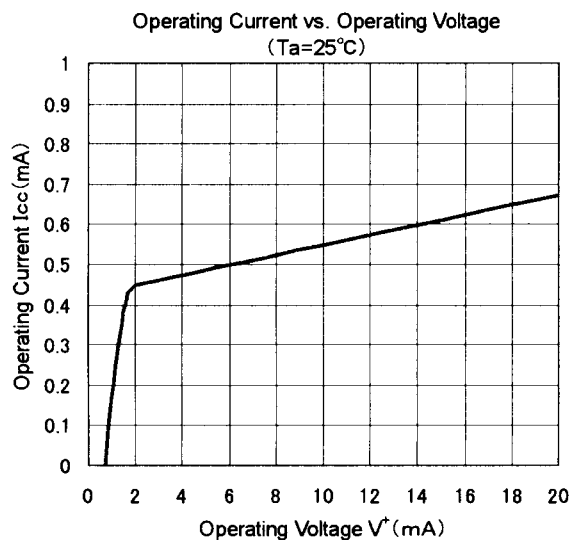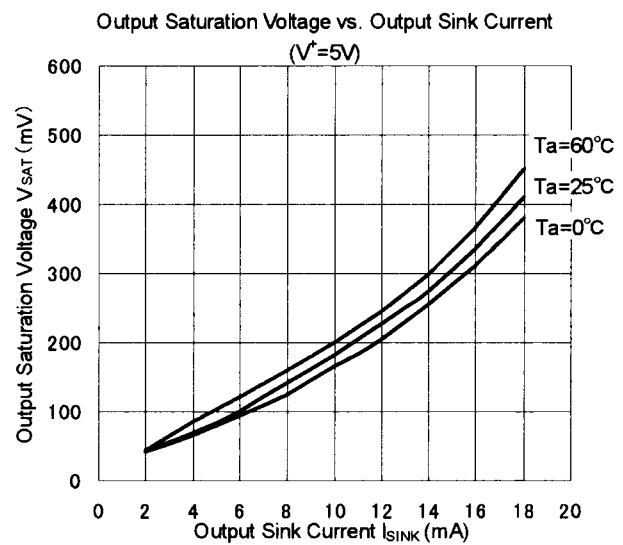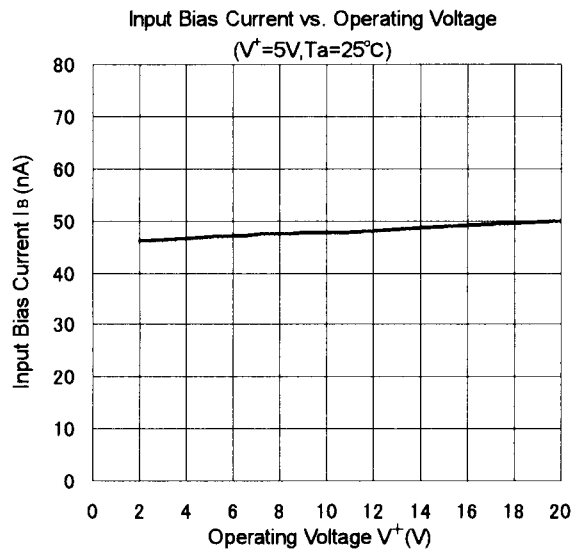

■ TYPICAL CHARACTERISTICS

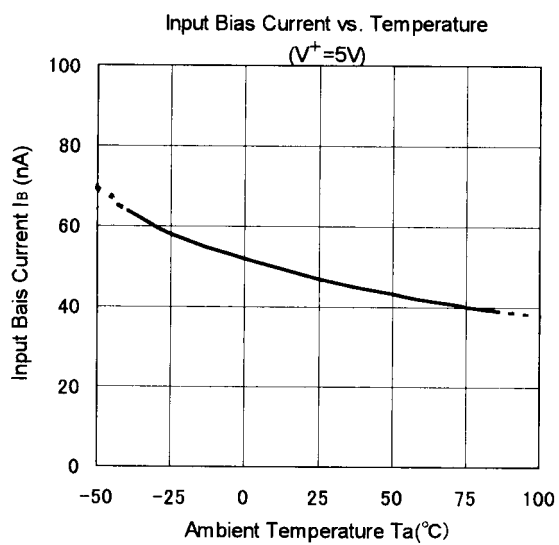

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com