

Supplementary Fuseblocks

Type M, For $1\frac{3}{32}$ " x $1\frac{1}{2}$ " Fuses

600 Volt, 30 Amps

BMA Series



Catalog Symbol: BMA Series

Type M Supplementary Fuseblocks

For use with any $1\frac{3}{32}$ " x $1\frac{1}{2}$ " Fuses
(Bussmann KTK, FNQ, FNM, BAF, BAN and AGU)

Ampere Rating: $\frac{1}{10}$ to 30A

Voltage Rating: 600V

Withstand Rating: 200,000 RMS Sym. or interrupting rating of the fuse used, whichever is lower.

Agency Information:

UL Recognized, UL 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235

UL Flammability: 94VO



Material: Thermoplastic

Catalog Data


| Amps | Poles | Terminal Type | |
|----------------|-------|---------------------------|------------------------------------|
| | | Screw with Quick Connect* | Pressure Plate with Quick Connect* |
| | Adder | BMA603ASQ | BMA603APO |
| $\frac{1}{10}$ | 1 | BMA6031SQ | BMA6031PQ |
| to | 2 | BMA6032SQ | BMA6032PQ |
| 30 | 3 | BMA6033SQ | BMA6033PQ |

*QUICK CONNECT RATED FOR 20A MAXIMUM.


Wire
Range
CU Only
#10-#18



Dimensional Data All dimensions $\pm .015$ "
(.38mm)

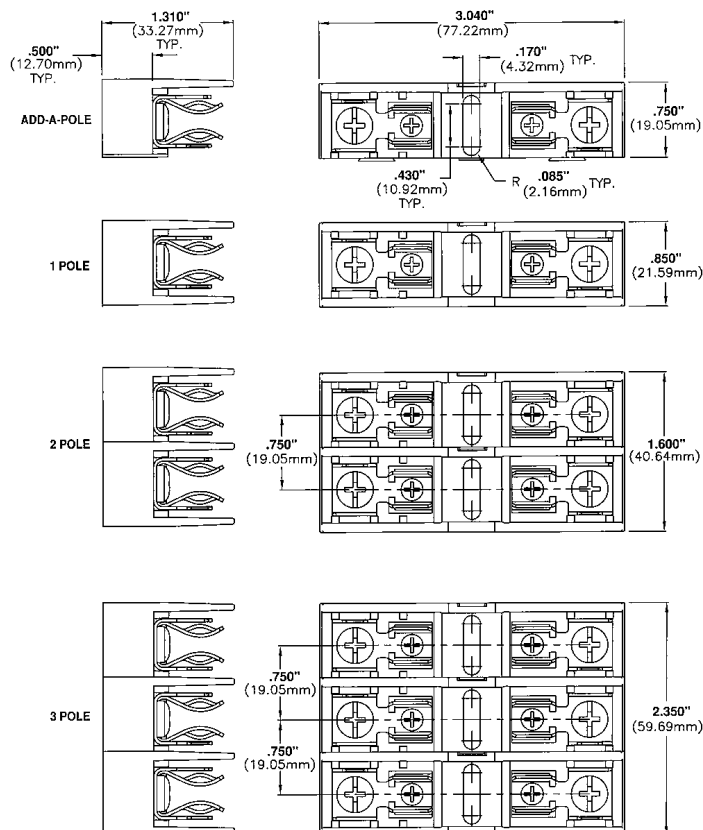

FUSEBLOCK MARKING (EXAMPLE SHOWN)



Fuse blocks feature a unique adder block which can be snapped onto 1-, 2-, or 3-pole blocks to form multi-pole segmented blocks of as many poles as desired.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com