VME, VMEE-M

Vectorbord Metric Extender Cards

VME J1 & J2 extender (assembly) is for 160mm & 220mm depths.. Three-layer construction, controlled impedance design, and patented signal trace shielding minimize crosstalk. Jumpers are provided for interrupting all signal lines. Mounting pads for additional DIN connector or for test point mounting of logic analyzer also included.

Excellent Selection Of Options

Termination for Vector J1 and J2 backplanes can be moved to extenders using male DIN connector (included) and Vector VMETB Terminator Boards, available separately. Extender bracket, Part NO. BR6U, can be used to connect J1 and J2 extenders, or to connect blank extender, Part No. EB220-3U, to J1 or J2 extenders. Blank extender provides rigidity when using a 3U extender in 6U card cage J1 extender, extender bracket, and blank extender are available

separately or can be ordered as an assembly.



 Length:
 12.20" (310mm)

 Height:
 9.19" (233.4mm) (6U)

 Material:
 FR4 Epoxy Glass

Impedance: Controlled / 3-layer; signal trace shielding

Current Rating: 5 amps per 10° rise
Voltage Rating: 200 RMS, or 300 VDC

Jumpers: Included; for signal line interrupt

Layer Design: 3 layer; trace shielding for each signal line

VMEE-J1 & VMEE-J2

 Length:
 12.20" (310mm)

 Height:
 3.94" (100.1mm) (3U)


 Material:
 FR4 Epoxy Glass


Impedance: Controlled / 3-layer; signal trace shielding

Current Rating: 5 amps per 10° rise
Voltage Rating: 200 RMS, or 300 VDC

Jumpers: Included; for signal line interrupt

Layer Design: 3 layer; trace shielding for each signal line

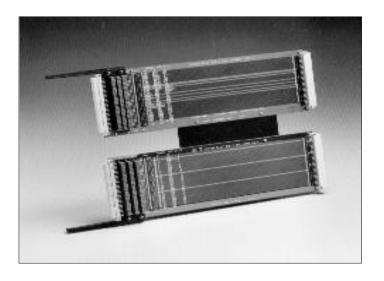

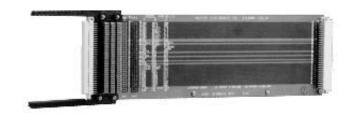

VME Monolithic J1/J2 VMEE-6UX160MM

VME extender for 160mm with monolithic J1/J2


Length: 10.00" (254mm)
Width: 9.19" (233mm) (6U)
Material/layers: FR4 Epoxy Glass
Impedance: Controlled
Current Rating: 5 amps per 10° rise

Voltage Rating: 5 amps per 10° rise
200 RMS, or 300 VDC
Jumpers: Included; for signal line interrupt

Layer Design: 4-layer; J1/J2 are monolithic

Other: Legends and test points with jumpers for signal line interrupt,

included

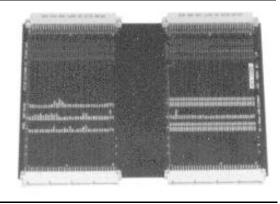

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com