

Switch Mode Power Supplies Encapsulated Constant Voltage

TLD1020-24

Description:

The TLD1020-24 is a compact and lightweight Constant Voltage Switch Mode Power Supply. Waterproof design within a 2x4 J box, IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Designed for outdoor and indoor applications. Some typical applications include LEDs, Lighting, etc.

Specifications (@25C)

Electrical Specifications:

Input Voltage: 100-304Vac¹
Input Frequency Range: 47-63Hz

 Max Input Current:
 0.3A @ 115Vac; 0.15A @ 230Vac

 Max Inrush Current:
 <5A@115Vac, 10A@220Vac</td>

 Power Factor:
 >0.9 at full load, 115Vac

 Output:
 24Vdc±5%, .830Adc Max

Crest Factor (lpk):1.5 Max.Leakage Current:300µA TypicalEfficiency:84% Typical at full load

Maximum power: 20W

Current Accuracy: ±1% (when applicable)

Load Regulation: ±3%

Hold up time: Half cycle minimum at 120 VAC and 80% of rated voltage Protection: Over-voltage, Over current and Short circuit protection:

Auto-recovery

Environmental Specifications:

Operating Temperature: -30 to 60°C (De-rating: 1%/°C from 60-70°C)

Storage Temperature: -40 to 85°C

Operating Humidity: 5 to 95% RH (non-Condensing)

Cooling: Convection cooling

Vibration: 5 to 50Hz

MTBF: >100,000 Hours at full load and 25°C ambient conditions EMC: Compliant to 47CFR, Part 2, Part 15 and Cispr PUB, 22

Class B

General Specifications:

Connections: 5in leads - Input: 18 AWG; Output: 18 AWG, Black (-), Gray (+)

Dimensions (WxLxH): 40.0x95.0x25mm

Weight: 120g

Warranty: 3 years @ 40°C, 100% Load

Safety Standards:


Standards: UL (cUL) 1310, UL48



RoHS Compliance: This power supply meets the requirements 2002/95/EC, know as the RoHS initiative.

Upon printing, this document is considered %uncontrolled+ Please contact Triad Magneticsqwebsite for the most current version.

For Illustration Only

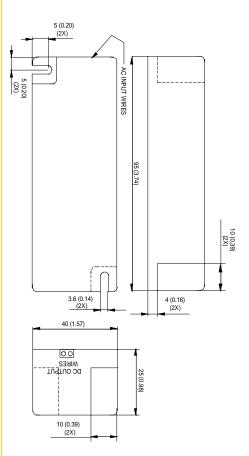

¹ Parts manufactured before November, 2010 have an input voltage range of 90 – 264VAC.

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com