
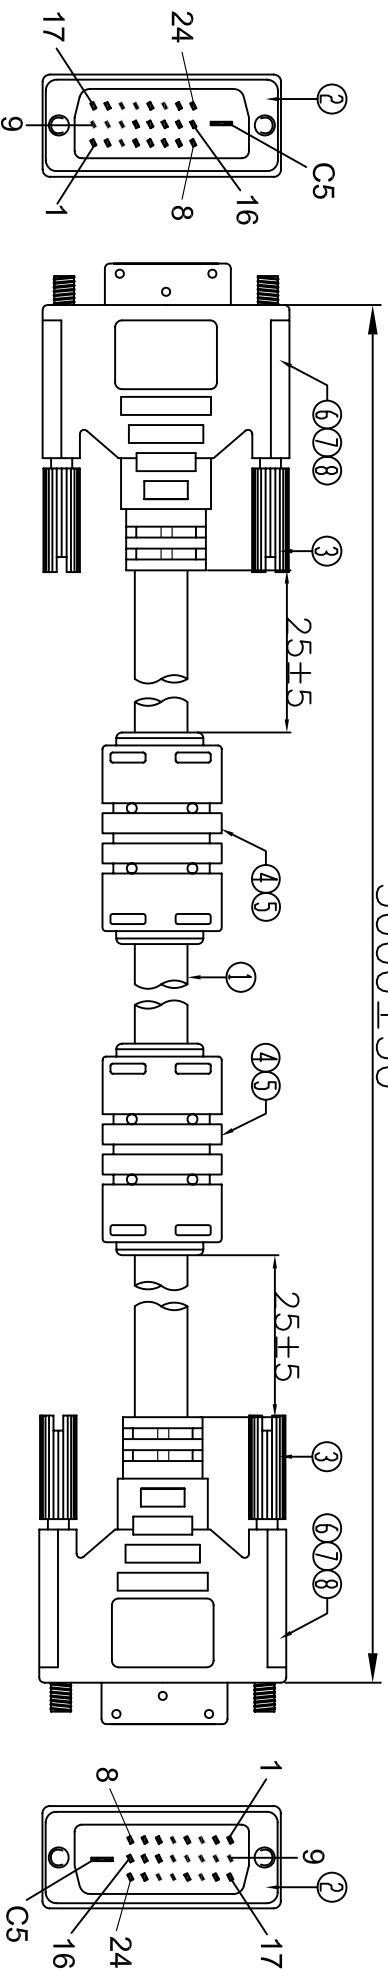


UNIT:mm


$$\underline{3000 \pm 50}$$


P1



Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:10M ohm min.
- 4.Hi-Pot:300V DC/10ms
- 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.



P

NO.	NAME	Q'TY	SPECIFICATION
⑧	TUBE	14	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm.
		8	HEAT SHRINK TUBE BLACK OD1.5mm L=15mm.
		2	HEAT SHRINK TUBE BLACK OD1.0mm L=25mm.
⑦	Copper	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑥	NI JACKET	8g	CLEAR PE(NM-15)
	OUT JACKET	30g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑤	OUT JACKET	20g	BLACK PVC 45P (CH-002)
④	FERRITE	2	Core:RH17.5*10.6*28.5mm
③	SCREW	4	SCREW #4*40UNS Ø2.8*132mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
②	CONN	2	DVI MALE 24+1 INSULATION BLACK:SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [(28AWG/1P+DW+AL/MY)*7C+28AWG*5C]+AL/MY+BD+D.W+BD+JACKET:BLACK OD:8.6±0.15mm L=3000+30/-0mm.

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	750-10011-00300
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	

4

 ω

2

1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com