

"High Frequency Ceramic Solutions"

5.4 GHz Filter Balun Combination

P/N 5400FB15A0100

Detail Specification: 04/04/12

Page 1 of 3

General Specifications

Part Number	5400FB15A0100
Frequency (MHz)	4900-5875
Unbalanced Impedance	50 Ω
Balanced Impedance	100 Ω
Insertion Loss	2 dB max.
Return Loss	9.5 dB min.
Phase Difference (degree)	180 $\pm$ 15
Amplitude Difference	2.0 dB max.


Attenuation (db)	30 min.@3500MHz
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity 45~75%RH, 12 mos. Max
Input Power	2 Watt max.
Reel Quantity	4,000

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 5400FB15A0100S
		T & R	Suffix = E	eg. 5400FB15A0100E
	Termination style	100% Tin	Suffix = None	eg. 5400FB15A0100 (E or S)
	Evaluation Board	5400FB15A0100-EBSMA		


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20
W	0.049 $\pm$ 0.008	1.25 $\pm$ 0.20
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 $\pm$ 0.004 / -0.008	0.30 $\pm$ 0.10 / -0.20
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

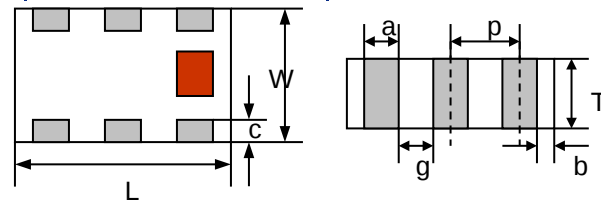

Terminal Configuration

No.	Function
1	Unbalanced Port (IN)
2	NC or DC Feed
3	NC
4	GND
5	Balanced Port
6	GND
7	Balanced Port
8	GND




Mounting Considerations

LEGEND

- Solder
- Land
- Through-hole ($\phi 0.3$)

Unit : mm

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

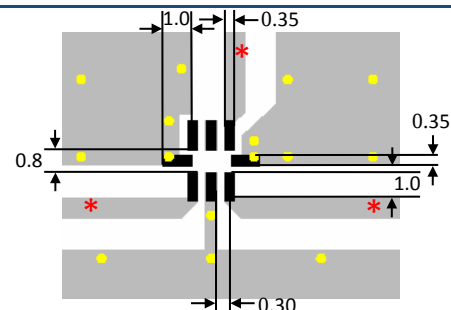

JOHANSON
TECHNOLOGY



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

5.4 GHz Filter Balun Combination


P/N 5400FB15A0100

Detail Specification: 04/04/12


Page 2 of 3

Typical Electrical Performance (T=25°C)

Insertion and Return Loss

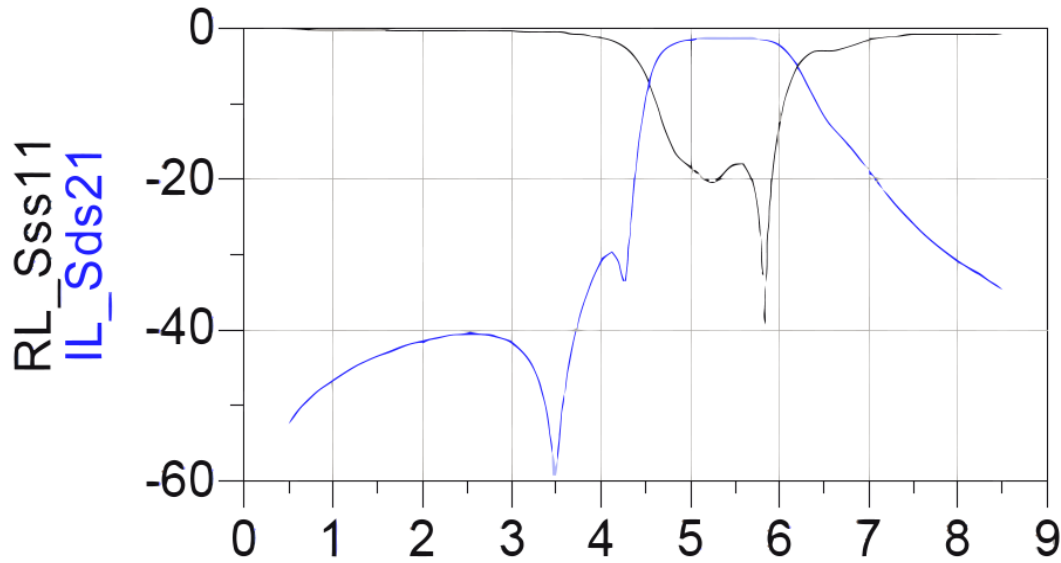

Amplitude Difference / Phase Difference

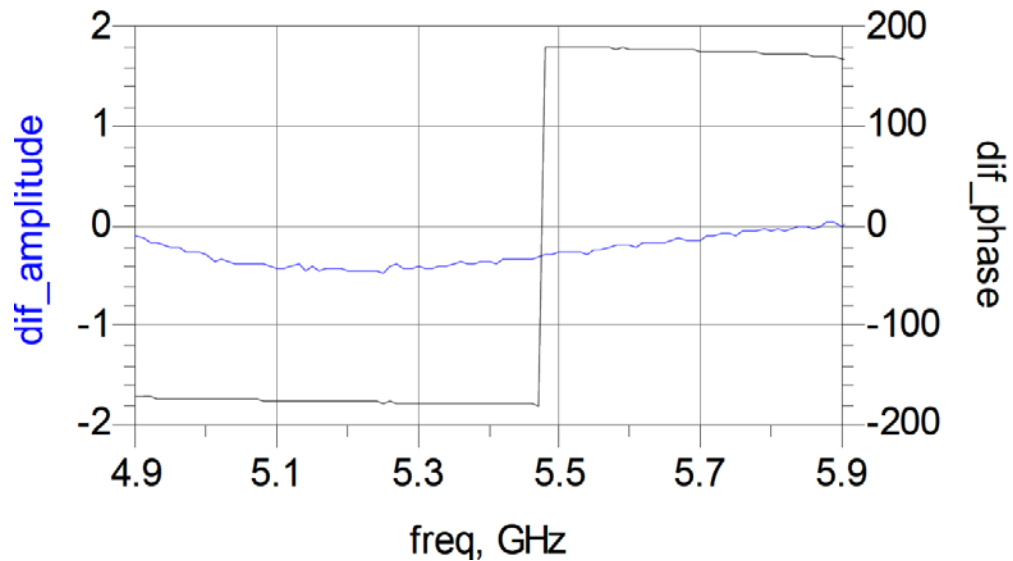

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com