
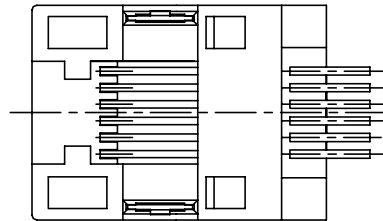
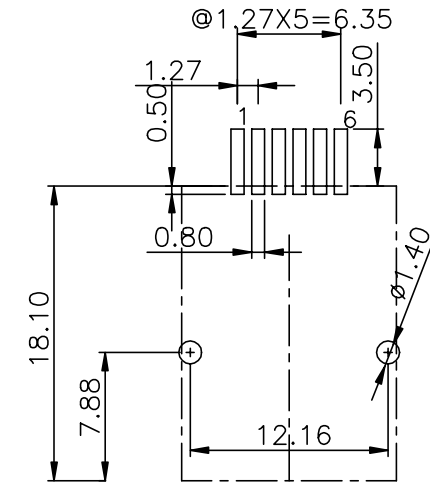
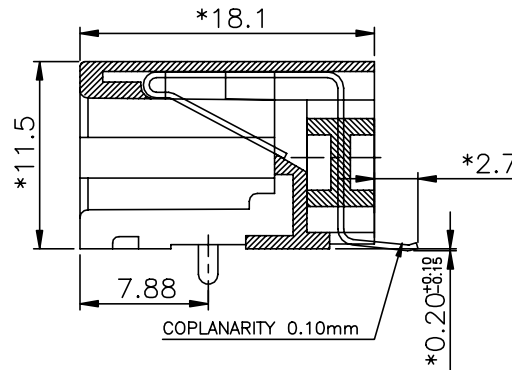


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		DRAWING CHANGE	SKYCHEN 07/28/06	

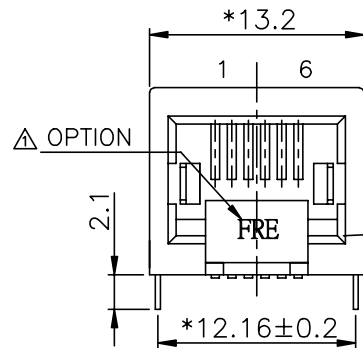

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+GF30% UL94V-0. COLOR:BLACK
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- IR REFLOW PEAK SOLDERING TEMPERATURE: 255°C TO 265°C 5~10 SECONDS.
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

△ RoHS PART NUMBER: E536X-FX05YX-L

6--6C 1- 3U" 2- 6U"
4--4C 3- 15U" 4- 30U"
 5- 50U"

V- W/ FRE LOGO
Q- W/O LOGO

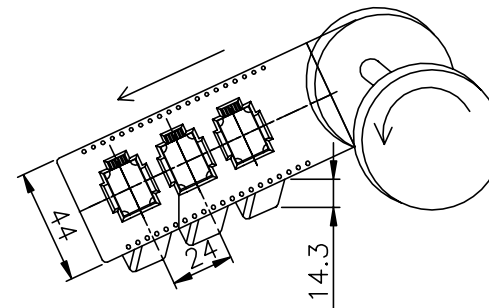

DETACHED LISTS	MM (INCH)		DFTO ANKUE	DATE 04/21/05
	TOLERANCES EXCEPT AS NOTED		CHKDANKUE	DATE 2006/7/28
	MM		MFO	DATE
	.0 ± 0.2	±	APPVLLUSHENG	DATE 2006/7/28
	.00 ± 0.15	±		
	.000 ± 0.075	±		
	ANGLES ± 0.5		MATERIAL :	
			QT*Y :	
			FINISH :	
			SCALE : 3:1	
	THIRD ANGLE PROJECTION			



RoHS Compliant

FULL RISE ELECTRONIC CO., LTD

TITLE
SIDE ENTRY PCB JACK(SMT) 6PDRAWING NO. GE533069-LA
/PART NO. SEE NOTE

DO NOT SCALE DRAWING

SIZE
A3REV
1

SHEET 1 OF 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com