

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

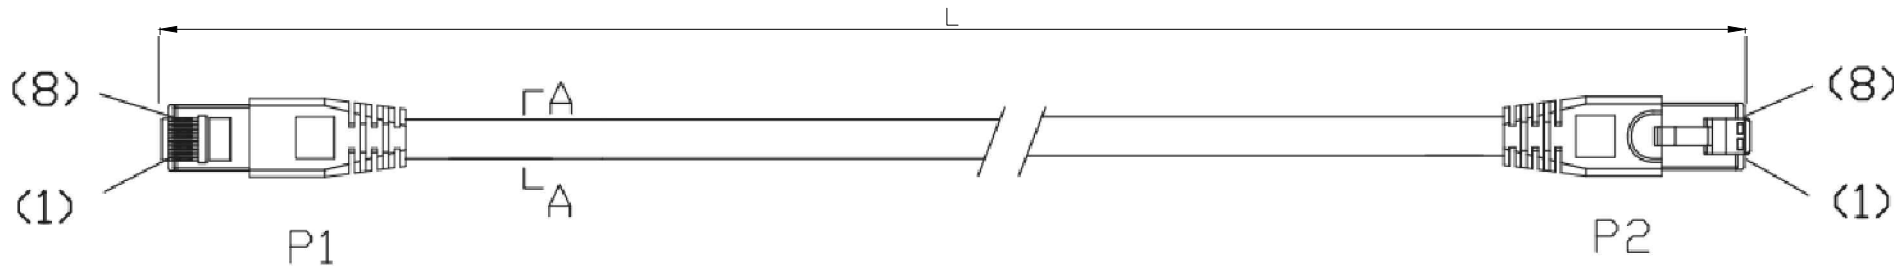


TOLERANCE

Length-ft	max-ft	min-ft
1	0.10	0.05
3	0.15	0.12
5	0.15	0.15
7	0.21	0.21
10	0.3	0.3
15	0.45	0.45
20	0.6	0.6
25	0.75	0.75
50	1.5	1.5
100	3	3



Material:

- Conductor: 24AWG 7*0.19±0.015mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL)
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2
- Cable tie: White
- Cable jacket color: Black, White, Blue, or Grey
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C ~ +60°C

PACKING



RoHS compliant
Unit: mm

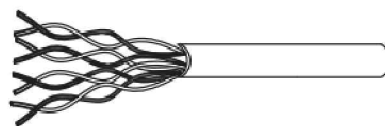

PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8

Order Code: DK-1611-xxx/x

Order lengths in feet: 1,3,5,7,10,15,
20,25,50,100Cable Jacket colors: Black(BL), White(WH),
Blue(B), Green(GR), or Grey(G)

Scale	FREE					Date	Name
TOLERANCE					Drawn	15.12.2015	Joanna
					Approved	15.12.2015	Joanna
DIM	TOL						
		①	Drawn	15.12.2015	Joanna		
Angle	TOL	Id.	Modification	Date	Name		

ASSMANN
WSW components

Customer-No.

ASSMANN WSW-No.

DK-1611-XXX/X

Drawing-No.

ASS 7510 CA

rev00

Replace

Sheet

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com