






REV.	DATE	DESCRIPTION
NC	05/24/05	INITIAL RELEASE
A	04/19/06	UPDATE DRAWING FORMAT

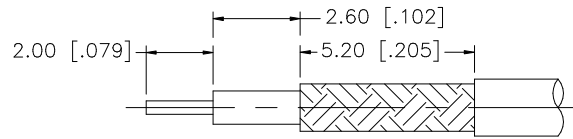

RECOMMENDED CABLE
STRIPPING DIM'S.

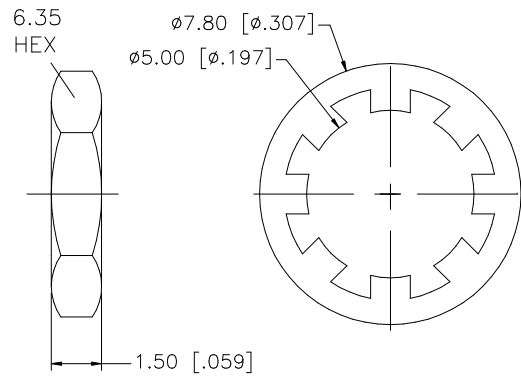

RECOMMENDED
MOUNTING HOLE

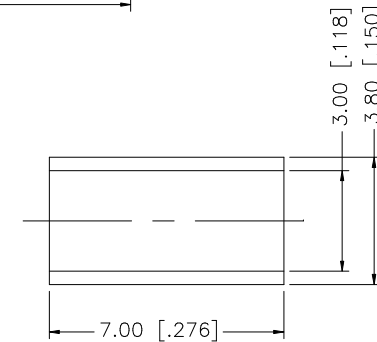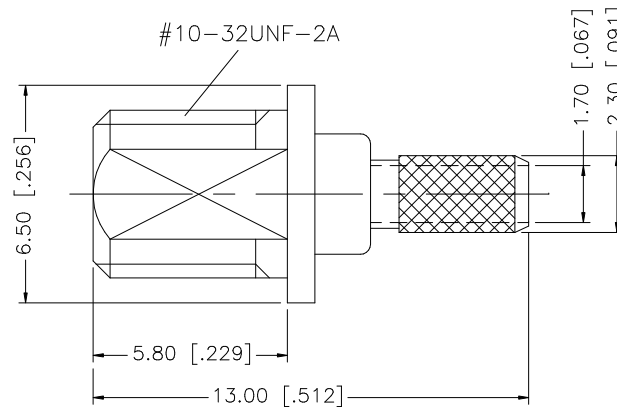

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	04/19/06										
7	FERRULE	COPPER	NICKEL	1		CHECKED				PART DESCRIPTION								
6	HEX NUT	BRASS	NICKEL	1		ISSUED				MMCX BULKHEAD CRIMP JACK (FOR RG-174/U, 188/U, 316/U CABLE)								
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1			PART NO.								
4	GASKET	SILICONE	RED	1						262121								
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE	C:/262/262121.DWG		DWG. NO.		262121.DWG		REV.	A	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com