

## Description

The SMC30J Transil series has been designed to protect sensitive equipment against surges below 3000 W (10/1000  $\mu$ s) and against electro-static discharges according to IEC 61000-4-2, and MIL STD 883, method 3015.

The Planar technology makes it compatible with high-end equipment and SMPS where low leakage current and high junction temperature are required to provide reliability and stability over time. SMC30J are packaged in SMC (SMC footprint in accordance with IPC 7531 standard).

## Features

- Peak pulse power:
  - 3000 W (10/1000  $\mu$ s)
- Stand off voltage range: from 5 V to 48 V
- Unidirectional and bidirectional types
- Low leakage current: 0.2  $\mu$ A
- Operating  $T_{jmax}$ : 175 °C
- JEDEC registered package outline

## Complies with the following standards

- IEC 61000-4-2 exceeds level 4
  - 30 kV (air discharge)
  - 30 kV (contact discharge)
- **MIL STD 883G, method 3015-7 Class 3B**
  - 25 kV HBM (human body model)
- Resin meets UL 94, V0
- MIL-STD-750, method 2026 solderability
- EIA STD RS-481 and IEC 60286-3 packing
- IPC 7531 footprint

**TM:** Transil is a trademark of STMicroelectronics

# 1 Characteristics


**Table 1. Absolute maximum ratings ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

| Symbol    | Parameter   | Value       | Unit               |
|-----------|---|-------------|--------------------|
| $P_{PP}$  | Peak pulse power dissipation<br>$T_j$ initial = $T_{amb}$ | 3000        | W                  |
| $T_{stg}$ | Storage temperature range                                 | -65 to +175 | $^{\circ}\text{C}$ |
| $T_j$     | Operating junction temperature range                      | -55 to +175 | $^{\circ}\text{C}$ |
| $T_L$     | Maximum lead temperature for soldering during 10 s.       | 260         | $^{\circ}\text{C}$ |

**Table 2. Thermal resistances**

| Symbol        | Parameter         | Value | Unit                 |
|---------------|-------------------|-------|----------------------|
| $R_{th(j-l)}$ | Junction to leads | 15    | $^{\circ}\text{C/W}$ |

**Figure 1. Electrical characteristics - definitions**

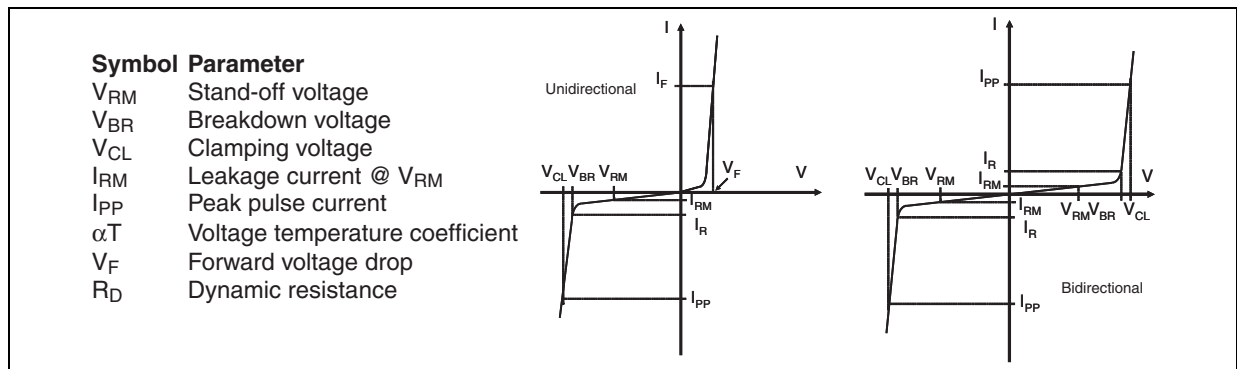

**Figure 2. Pulse definition for electrical characteristics**

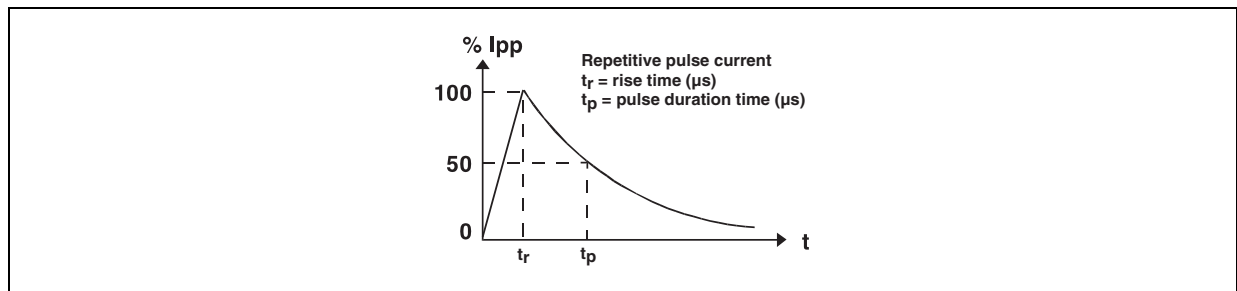


Table 3. Electrical characteristics - parameter values ( $T_{amb} = 25\text{ °C}$ )

| Order code    | $I_{RM\ max}@V_{RM}$ |     | $V_{BR}\ @I_R^{(1)}$ |      |    | $V_{CL}\ @I_{PP}\ 10/1000\ \mu s$ |                  | $R_D^{(2)}\ 10/1000\ \mu s$ | $\alpha T^{(3)}$ |
|---------------|----------------------|-----|----------------------|------|----|-----------------------------------|------------------|-----------------------------|------------------|
|               |                      |     | min                  | typ  |    | max                               |                  |                             |                  |
|               | $\mu A$              | V   | V                    |      | mA | V                                 | A <sup>(4)</sup> | $\Omega$                    | 10-4/ °C         |
| SMC30J5.0A/CA | 500                  | 5   | 6.4                  | 6.74 | 10 | 9.2                               | 327              | 0.008                       | 5.7              |
| SMC30J6.0A/CA | 500                  | 6   | 6.7                  | 7.05 | 10 | 10.3                              | 291              | 0.011                       | 5.9              |
| SMC30J6.5A/CA | 250                  | 6.5 | 7.2                  | 7.58 | 10 | 11.2                              | 268              | 0.014                       | 6.1              |
| SMC30J8.5A/CA | 10                   | 8.5 | 9.4                  | 9.9  | 1  | 14.4                              | 208              | 0.022                       | 7.3              |
| SMC30J10A/CA  | 0.2                  | 10  | 11.1                 | 11.7 | 1  | 17                                | 176              | 0.030                       | 7.8              |
| SMC30J12A/CA  | 0.2                  | 12  | 13.3                 | 14   | 1  | 19.9                              | 151              | 0.039                       | 8.3              |
| SMC30J13A/CA  | 0.2                  | 13  | 14.4                 | 15.2 | 1  | 21.5                              | 140              | 0.045                       | 8.4              |
| SMC30J15A/CA  | 0.2                  | 15  | 16.7                 | 17.6 | 1  | 24.4                              | 123              | 0.055                       | 8.8              |
| SMC30J16A/CA  | 0.2                  | 16  | 17.8                 | 18.7 | 1  | 26                                | 115              | 0.063                       | 8.8              |
| SMC30J18A/CA  | 0.2                  | 18  | 20                   | 21.1 | 1  | 29.2                              | 103              | 0.079                       | 9.2              |
| SMC30J20A/CA  | 0.2                  | 20  | 22.2                 | 23.4 | 1  | 32.4                              | 93               | 0.097                       | 9.4              |
| SMC30J22A/CA  | 0.2                  | 22  | 24.4                 | 25.7 | 1  | 35.5                              | 85               | 0.115                       | 9.6              |
| SMC30J24A/CA  | 0.2                  | 24  | 26.7                 | 28.1 | 1  | 38.9                              | 77               | 0.140                       | 9.6              |
| SMC30J26A/CA  | 0.2                  | 26  | 28.9                 | 30.4 | 1  | 42.1                              | 71               | 0.165                       | 9.7              |
| SMC30J28A/CA  | 0.2                  | 28  | 31.1                 | 32.7 | 1  | 45.4                              | 66               | 0.192                       | 9.8              |
| SMC30J30A/CA  | 0.2                  | 30  | 33.3                 | 35.1 | 1  | 48.4                              | 62               | 0.215                       | 9.9              |
| SMC30J33A/CA  | 0.2                  | 33  | 36.7                 | 38.6 | 1  | 53.3                              | 56               | 0.261                       | 10.0             |
| SMC30J36A/CA  | 0.2                  | 36  | 40.0                 | 42.1 | 1  | 58.1                              | 48.41            | 0.331                       | 10.0             |
| SMC30J40A/CA  | 0.2                  | 40  | 44.4                 | 46.7 | 1  | 64.5                              | 43.5             | 0.409                       | 10.1             |
| SMC30J48A/CA  | 0.2                  | 48  | 53.2                 | 56.0 | 1  | 76.6                              | 38.0             | 0.542                       | 10.3             |

1. Pulse test:  $t_p < 50\ ms$

2. To calculate maximum clamping voltage at other surge level, use the following formula:  $V_{CLmax} = V_{CL} - R_D \times (I_{PP} - I_{PPappli})$   
where  $I_{PPappli}$  is the surge current in the application

3. To calculate  $V_{BR}$  or  $V_{CL}$  versus junction temperature, use the following formulas:

$$V_{BR}\ @\ T_J = V_{BR}\ @\ 25\text{ °C} \times (1 + \alpha T \times (T_J - 25))$$

$$V_{CL}\ @\ T_J = V_{CL}\ @\ 25\text{ °C} \times (1 + \alpha T \times (T_J - 25))$$

4. Surge capability given for both directions for unidirectional and bidirectional types.

Figure 3. Peak pulse power dissipation versus initial junction temperature

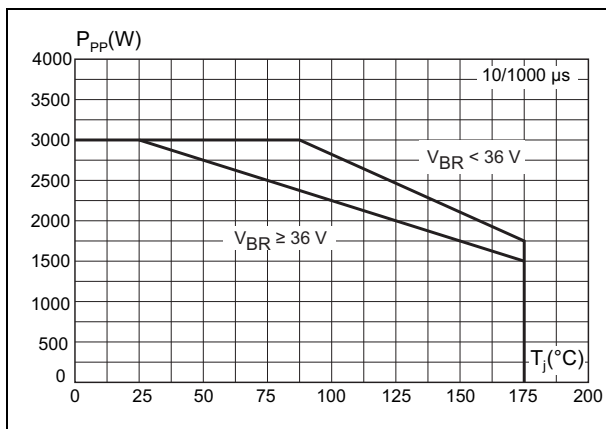


Figure 4. Peak pulse power versus exponential pulse duration ( $T_j$  initial = 25 °C)

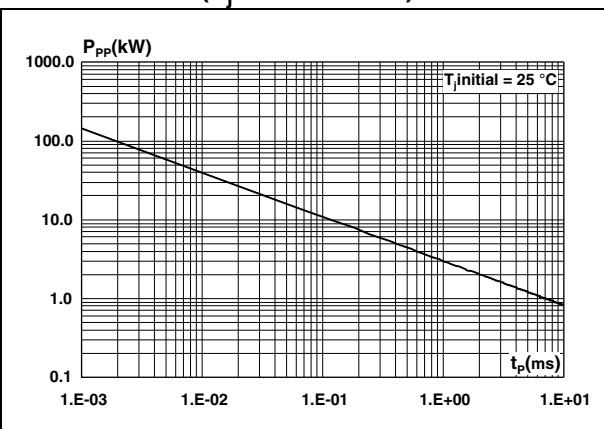


Figure 5. Clamping voltage versus peak pulse current (exponential waveform, maximum values)

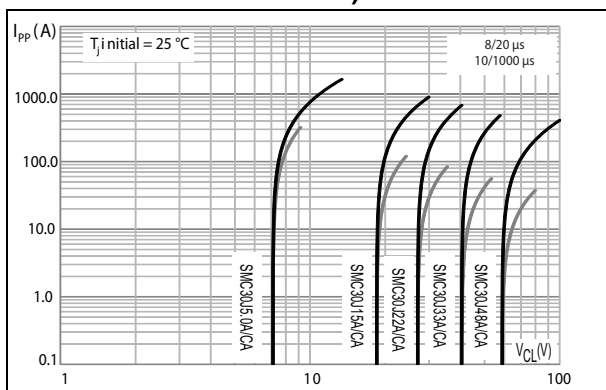


Figure 6. Junction capacitance versus reverse applied voltage for unidirectional types

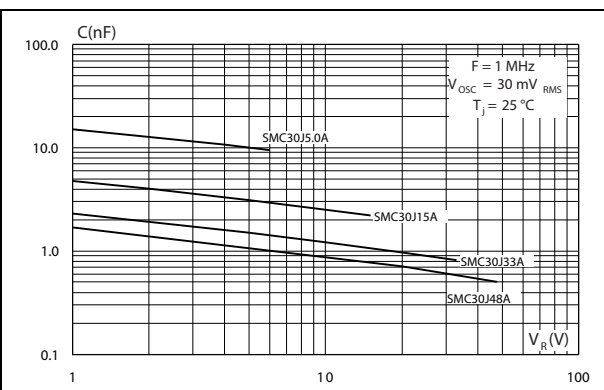


Figure 7. Junction capacitance versus reverse applied voltage for bidirectional types

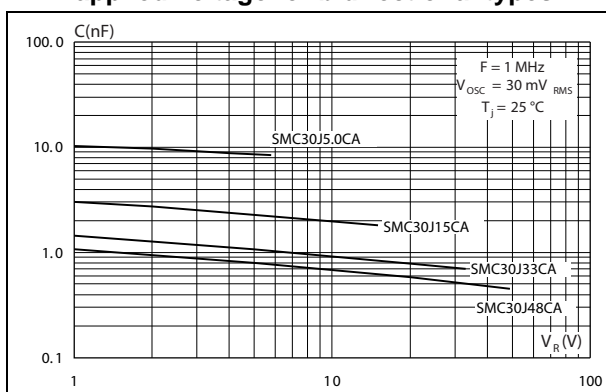


Figure 8. Peak forward voltage drop versus peak forward current

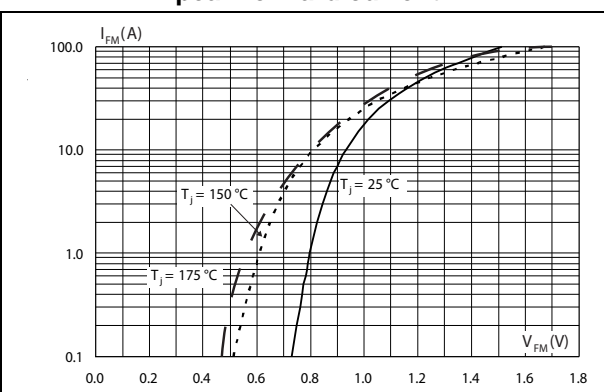


Figure 9. Relative variation of thermal impedance versus pulse duration

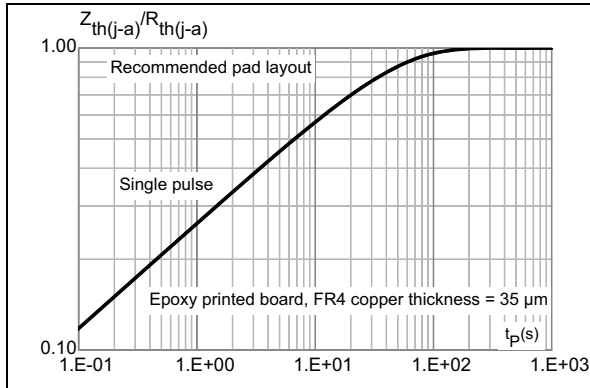


Figure 10. Thermal resistance junction to ambient versus copper surface under each lead



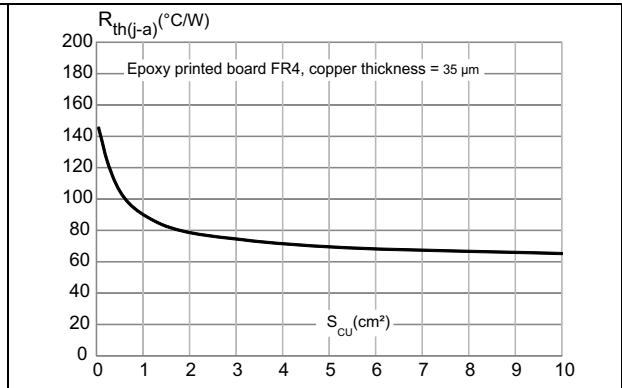


Figure 11. Leakage current versus junction temperature (typical values)

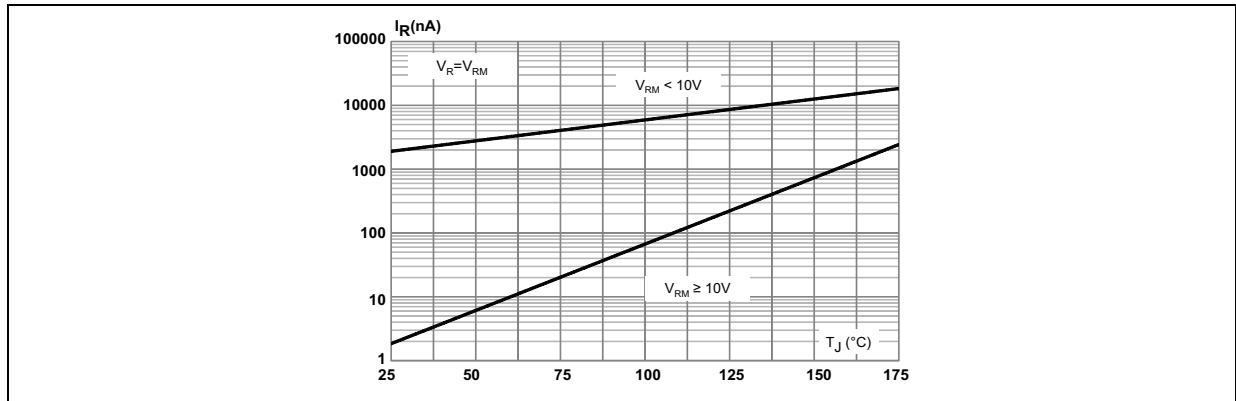

## 2 Ordering information scheme

Figure 12. Ordering information scheme

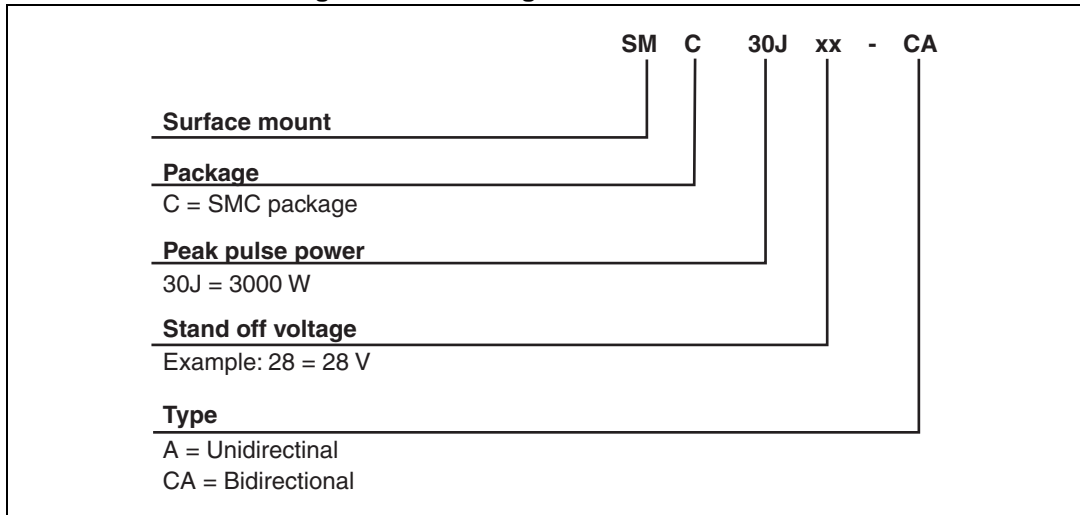

### 3 Package information

- Case: JEDEC DO-214AB molded plastic over planar junction
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: for unidirectional types the band indicates cathode
- Flammability: epoxy is rated UL94V-0
- RoHS package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Table 4. SMC package dimensions

| Ref. | Dimensions  |      |        |       |
|------|-------------|------|--------|-------|
|      | Millimeters |      | Inches |       |
|      | Min.        | Max. | Min.   | Max.  |
| A1   | 1.90        | 2.45 | 0.075  | 0.096 |
| A2   | 0.05        | 0.20 | 0.002  | 0.008 |
| b    | 2.90        | 3.2  | 0.114  | 0.126 |
| c    | 0.15        | 0.41 | 0.006  | 0.016 |
| E    | 7.75        | 8.15 | 0.305  | 0.321 |
| E1   | 6.60        | 7.15 | 0.260  | 0.281 |
| E2   | 4.40        | 4.70 | 0.173  | 0.185 |
| D    | 5.55        | 6.25 | 0.218  | 0.246 |
| L    | 0.75        | 1.60 | 0.030  | 0.063 |


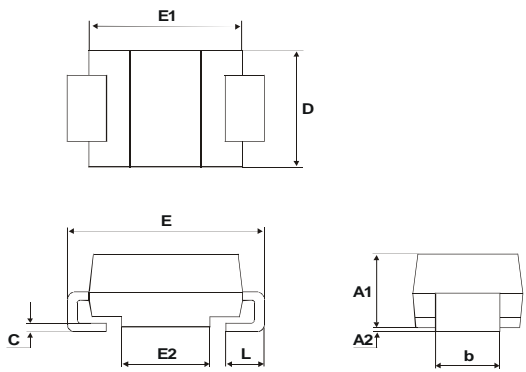


Figure 13. Footprint dimensions mm (inches)

Figure 14. Marking layout<sup>(1)</sup>

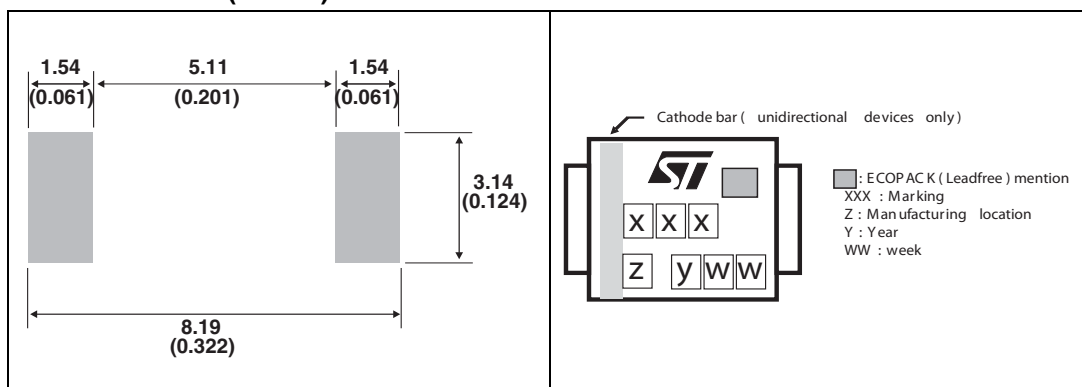

1. Marking layout can vary according to assembly location.

Table 5. Marking

| Order code | Marking | Order code  | Marking |
|------------|---------|-------------|---------|
| SMC30J5.0A | 3AAA    | SMC30J5.0CA | 3BAA    |
| SMC30J6.0A | 3AAB    | SMC30J6.0CA | 3BAB    |
| SMC30J6.5A | 3AAC    | SMC30J6.5CA | 3BAC    |
| SMC30J8.5A | 3AAD    | SMC30J8.5CA | 3BAD    |
| SMC30J10A  | 3AAW    | SMC30J10CA  | 3BAW    |
| SMC30J12A  | 3AAF    | SMC30J12CA  | 3BAF    |
| SMC30J13A  | 3AAG    | SMC30J13CA  | 3BAG    |
| SMC30J15A  | 3AAH    | SMC30J15CA  | 3BAH    |
| SMC30J16A  | 3AAI    | SMC30J16CA  | 3BAI    |
| SMC30J18A  | 3AAJ    | SMC30J18CA  | 3BAJ    |
| SMC30J20A  | 3AAK    | SMC30J20CA  | 3BAK    |
| SMC30J22A  | 3AAL    | SMC30J22CA  | 3BAL    |
| SMC30J24A  | 3AAE    | SMC30J24CA  | 3BAE    |
| SMC30J26A  | 3AAM    | SMC30J26CA  | 3BAM    |
| SMC30J28A  | 3AAN    | SMC30J28CA  | 3BAN    |
| SMC30J30A  | 3AAO    | SMC30J30CA  | 3BAO    |
| SMC30J33A  | 3AAP    | SMC30J33CA  | 3BAP    |
| SMC30J36A  | 3AAQ    | SMC30J36CA  | 3BAQ    |
| SMC30J40A  | 3AAR    | SMC30J40CA  | 3BAR    |
| SMC30J48A  | 3AAS    | SMC30J48CA  | 3BAS    |

## 4 Ordering information

Table 6. Ordering information

Table 7.

| Order code                   | Marking                               | Package | Weight | Base qty | Delivery mode |
|------------------------------|---------------------------------------|---------|--------|----------|---------------|
| SMC30JxxxA/CA <sup>(1)</sup> | See <a href="#">Table 5 on page 8</a> | SMC     | 0.25 g | 2500     | Tape and reel |

1. Where xxx is nominal value of  $V_{BR}$  and A or CA indicates unidirectional or bidirectional version. See [Table 3](#) for list of available devices and their order codes

## 5 Revision history

Table 8. Document revision history

| Date        | Revision | Changes   |
|-------------|----------|---|
| 28-Jul-2011 | 1        | Initial release.  |
| 15-Jul-2015 | 2        | Updated features on cover page.<br>Updated <a href="#">Table 1</a> , <a href="#">Figure 3</a> , <a href="#">Figure 5</a> , <a href="#">Figure 6</a> , <a href="#">Figure 7</a> ,<br><a href="#">Figure 8</a> , <a href="#">Figure 10</a> and <a href="#">Figure 11</a> .<br>Updated <a href="#">Table 5</a> . |
| 22-Jul-2015 | 3        | Updated <a href="#">Figure 9</a> .  |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

# AMEYA360

## Components Supply Platform

### Authorized Distribution Brand :



### Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

### Contact Us :

#### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

#### ➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

#### ➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

#### ➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)