REV	ECN.NO:	B Y	DATE
A1	EG-H31002	SYSTEM	08/04/23
A2	EG-H31003	SYSTEM	08/08/06

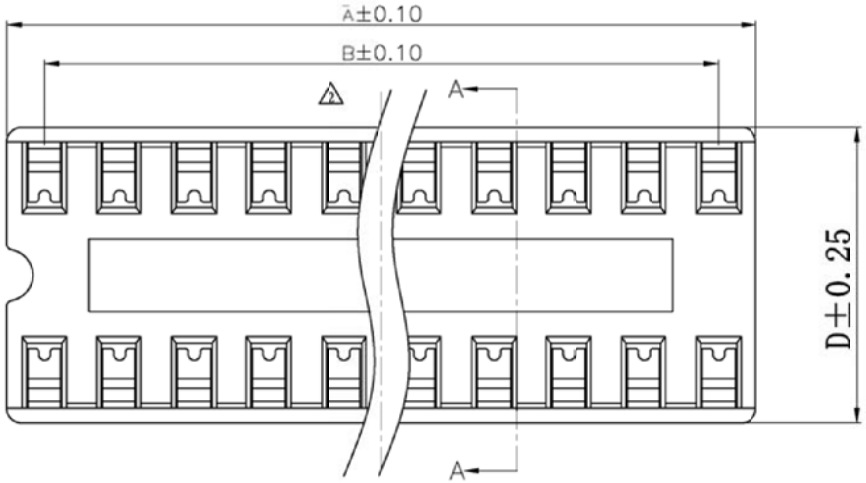

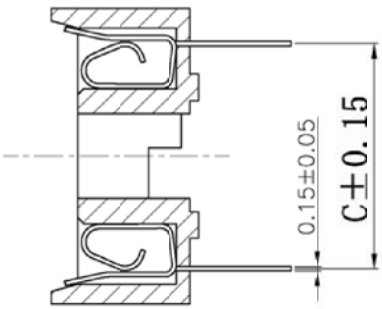

SECTION: A–A

NOTES:
MATERIAL:
CONTACTS:PHOSPHOR BRONZE
IMSULATOR:PBT+30% GLASS UL 94V–0
ELECTRICAL:
CONTACT CURRENT PATING:1A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC
CONTACT RESISTANCE: 20milliohms max
INSULATION RESISTANCE: 1000 MEGOHMS
CAPACITANCE:0.5PICO–FARAD MAXIMUM
TEMPERATURE RANGE:–40°C+105°C
MECHANICAL:
ENGAGING FORCE:340g/A CONTACT MAX.
SEPARATING FORCE:20g/A CONTACT MIN.
DURABILITY:50 CYCLES
NO.OF CONTACT:6–48
FINISH:
CONTACT PLATING:TIN PLATED 60.03U"–88.35U"

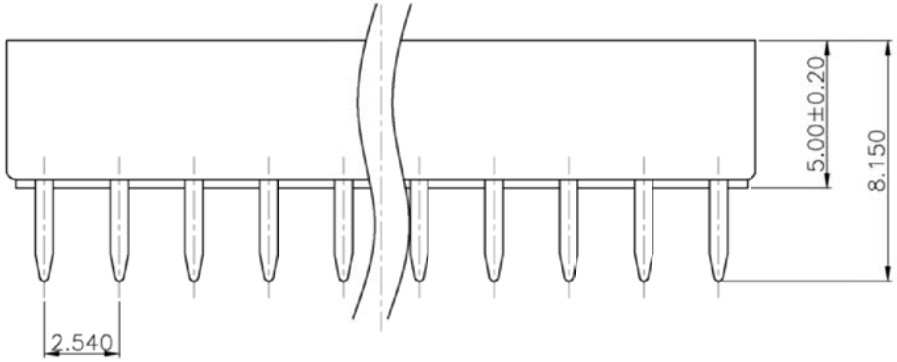

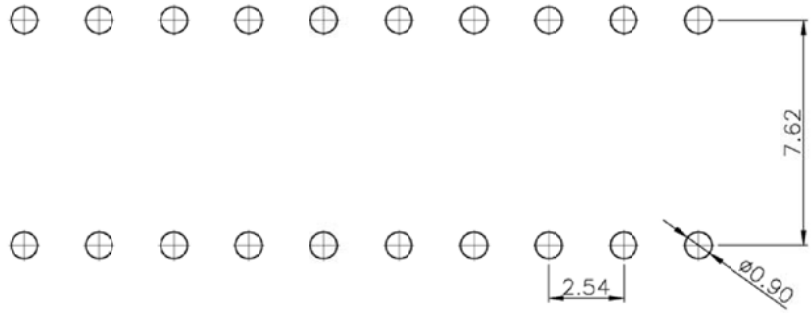

PCB LAYOUT

PIN NO.	DIM A	DIM B	DIM C	DIM D
6	7.62	5.08	7.62	10.16
8	10.16	7.62	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.76	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.4	22.86	7.62	10.16
22	27.95	25.4	7.62	10.16

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		CnC Tech, LCC Industrial Cable and Connector Technology					
			TITLE: IC SOCKET PH:2.54				
X.X ±0.30	X.X° ±3°	APPD:	PRODUCT NO: 241-XX-1-03				
X.XX ±0.20	X.XX° ±1°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX ±0.10	X.XXX° ±0.5°	DRAW:	08.08.06	FREE	MM	Z	1

AMEYA360
Components Supply Platform

Authorized Distribution Brand :

Website :

Welcome to visit www.ameya360.com

Contact Us :

- ### Address :

  401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
  Minhang District, Shanghai , China

- ### Sales :

  Direct +86 (21) 6401-6692

  Email amall@ameya360.com

  QQ 800077892

  Skype ameyasales1 ameyasales2

- ### Customer Service :

  Email service@ameya360.com

- ### Partnership :

  Tel +86 (21) 64016692-8333

  Email mkt@ameya360.com