


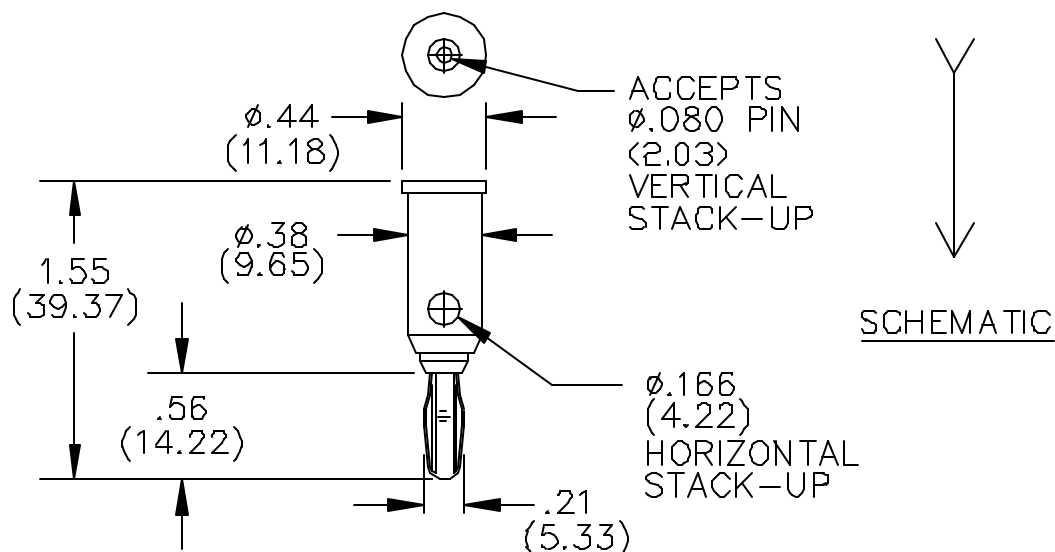

### FEATURES:

- Permits pin tip cords to be used with equipment having banana jacks.

### MATERIALS:

Upper Conn.: Pin Jack

Material: Spring – Beryllium Copper per QQ-C-533, Berylco 25, Cond. H.T.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, 200/300 microinches

Insulation: ABS molded to pin jack and banana plug body.

Marking: “1809” “POMONA ELECTRONICS CALIF.”

Lower Conn.: Standard Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Berylco 25, Cond. HT.

Plug Body – Brass per QQ-B-626,

Alloy 360, ½ Hard

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

### RATINGS:

Operating Voltage: 2500 WVDC

Operating Temperature: +50°C. (+122°F.) Max.

Current: 5 Amperes

### ORDERING INFORMATION: Model 1809-\*

\*= Color, -0 Black, -2 Red

Ordering Example: 1809-2 Adapter Color is Red

Other colors available on special request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com