



DESCRIPTION: MALE - SOLDER CUP - MACHINED - ECONOMY

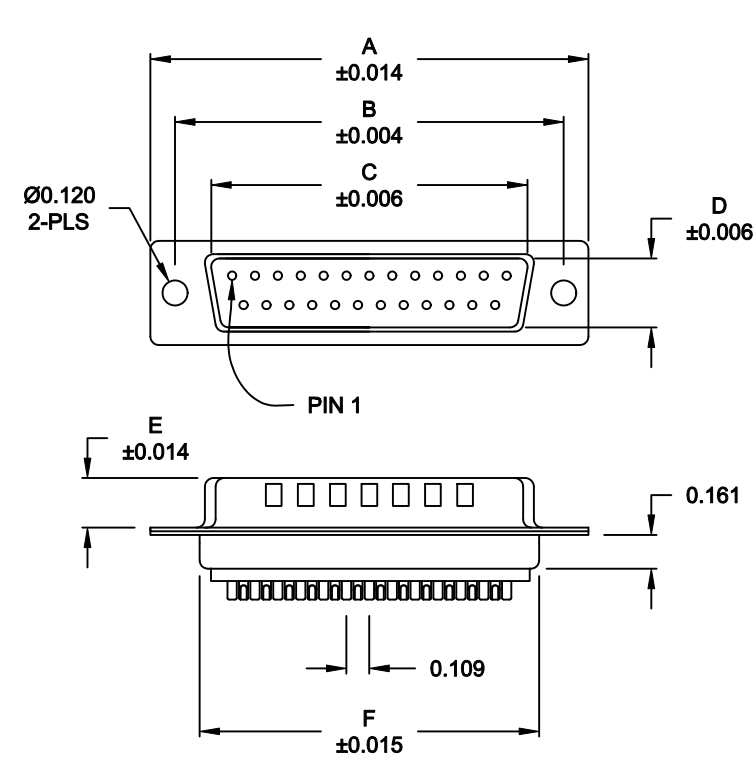

WILL ACCEPT
26-20 AWG WIRE

No. OF PINS	DIMENSIONS							
	A	B	C	D	E	F	G	H
9	1.213	0.984	0.666	0.329	0.236	0.756	0.496	0.427
	30.80	24.99	16.92	8.36	5.99	19.20	12.60	10.85
15	1.541	1.312	0.994	0.329	0.236	1.091	0.496	0.427
	39.15	33.32	25.25	8.36	5.99	27.70	12.60	10.85
25	2.087	1.852	1.534	0.329	0.236	1.618	0.496	0.427
	53.00	47.04	38.96	8.36	5.99	41.10	12.60	10.85

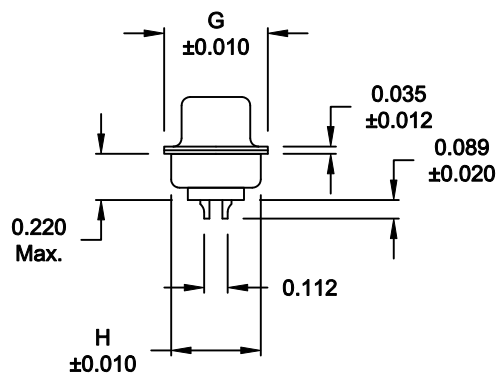

MATERIAL:

SHELL: STEEL, NICKEL OR TIN PLATED
INSULATOR: UL 94V-O RATED PBT-WHITE
PROCESS TEMP.: 260° FOR CABLE APPLICATIONS,
230° FOR BOARD
CONTACT: BRASS
SEALING MATERIAL: F08 FLEXABLE ADHESIVE

ELECTRICAL:

CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: 15 mOhms Max.
INSULATION RESISTANCE: 1,000 MOhms min.
VOLTAGE: 500VAC FOR 1 MINUTE
TEMPERATURE: -50° C TO 100° C

RoHS COMPLIANT

772-EYY-1 0 Y R YY 1

SERIES
POSITIONS
E09
E15
E25
GENDER
1 = MALE
TERMINATION
0 = SOLDER CUP
SHELL PLATING
2 = TIN (GROUND INDENTS)
3 = NICKEL (GROUND INDENTS)
RoHS COMPLIANT
HARDWARE OPTIONS
00 = NO HARDWARE
01 = 0.098" 4-40 INSERT, BOARD SIDE
PLATING OPTIONS
1 = GOLD FLASH



MEETS IP67 STANDARDS

(SEE PAGE 2 FOR SEALING DETAILS)

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 03-26-09		
		CHECKED:		DATE:		
		SCALE: 1 : 1		SHEET OF 1 2		REV 4
		DWG NO. 772-EYY-10YRYY1				


DESCRIPTION: IP67 - MALE - SOLDER CUP - MACHINED - ECONOMY - SEALING PROCESS

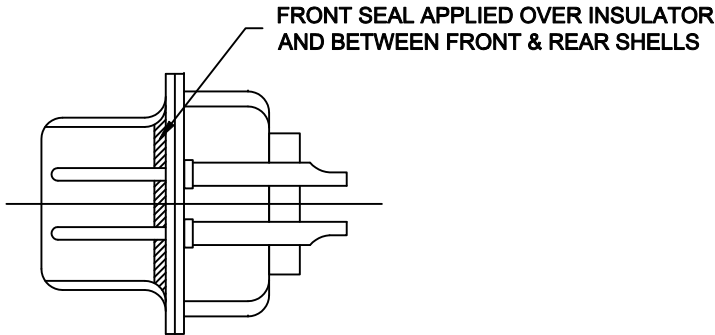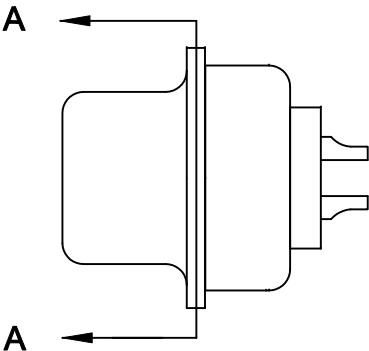

DETAIL A-A

HARDWARE OPTION

01X 0.098" (BOARD SIDE) - CN1

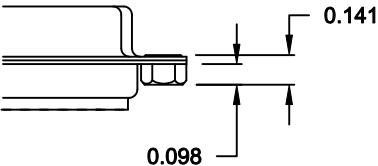

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 03-26-09	
		CHECKED:		DATE:	
NorComp	SCALE: 2.5 : 1		SHEET 2 OF 2		REV 4
	DWG NO. 772-EYY-10YRYY1				

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com