


Model 2882 BNC (Male) To Stacking Pin Tip Plugs

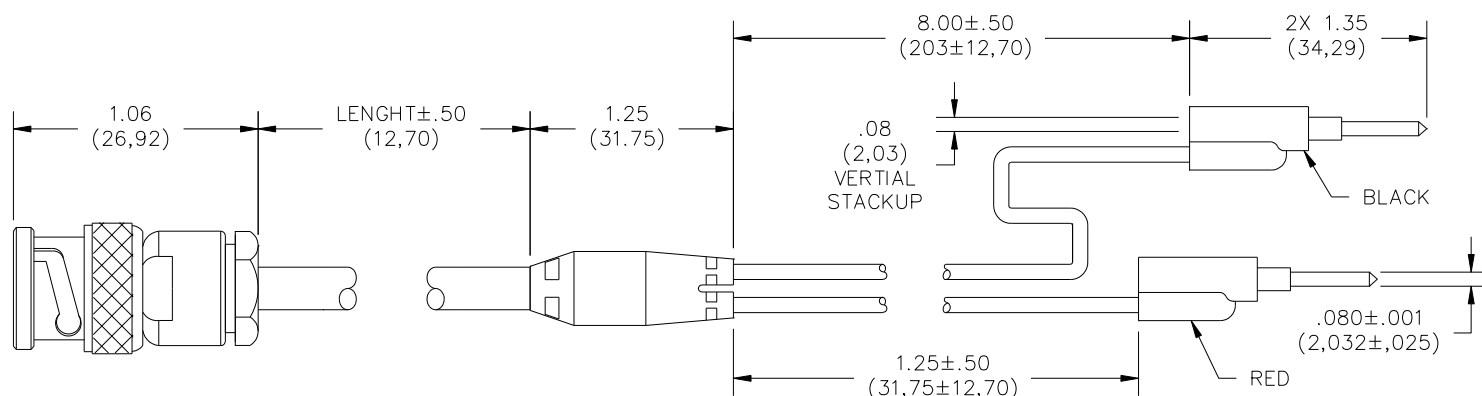

FEATURES:

- Cable interfaces a BNC based instrument to pin tip jacks.
- Shielding from BNC to the pin tip breakout area reduces the effect of signal leakage or noise interference.
- Pin tip plugs are vertically stackable for added test versatility.
- Pin tip plug and spring are gold plated for low contact resistance to ensure signal integrity.
- BNC connector center contact is gold plated and the dielectric is PTFE for superior performance.
- Schematic: Red pin tip plug to BNC center contact, Black pin tip plug to BNC Shell.

MATERIALS:

BNC: Body – Brass, Tarnish Resistant
 Center Contact: Brass, Gold Plated
 Dielectric: PTFE
 Cable: RG58C/U, 50 Ohm Impedance, Capacitance:
 30.8 pF/Ft., .195" (5.0mm) O.D. Nom. Color: Black.
 Marking: POMONA 2882-C-xx

Molded Breakout: PVC molded to the coaxial cable and breakout leads. Color: Black

Breakout Leads: 20 AWG, 41 x 36 t.c., .087" (2,21mm) O.D. Color matches pin tip plug

Pin Tip Plugs: Body – Brass, Gold Plated

Spring: Beryllium Copper, Gold Plated

Insulation: Polypropylene, molded to the pin tip body and wire. Color: one black, one red.

RATING:

Operating Voltage: Hand-held Testing:
 30VAC/60VDC Max.

Hands Free Testing in Controlled Voltage
 Environments: 500 VRMS

Operating Temperature: +50°C (+122°F)

ORDERING INFORMATION: Model 2882-C-XX
 XX = Length in inches, Standard Lengths: 60" (152.40cm)

Ordering Ex: 2882-C-60, Cable length is 60 inches long excluding the BNC connector, molded breakout, and pin tip plugs & leads.

Additional lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com