

### FEATURES

- Offset voltage: 2.2 mV maximum
- Low input bias current: 1 pA maximum
- Single-supply operation: 1.8 V to 5.5 V
- Low noise: 22 nV/ $\sqrt{\text{Hz}}$
- Micropower: 50  $\mu\text{A}$ /amplifier maximum over temperature
- No phase reversal
- Unity gain stable
- Qualified for automotive applications

### APPLICATIONS

- Battery-powered instrumentation
- Multipole filters
- Current shunt sense
- Sensors
- ADC predrivers
- DAC drivers/level shifters
- Low power ASIC input or output amplifiers

### GENERAL DESCRIPTION

The [AD8613/AD8617/AD8619](#) are single, dual, and quad micro-power, rail-to-rail input and output amplifiers that feature low supply current, as well as low input voltage and current noise.

The parts are fully specified to operate from 1.8 V to 5 V single supply, or  $\pm 0.9$  V and  $\pm 2.5$  V dual supply. The combination of low noise, very low input bias currents, and low power consumption make the [AD8613/AD8617/AD8619](#) especially useful in portable and loop-powered instrumentation.

The ability to swing rail-to-rail at both the input and output enables designers to buffer CMOS ADCs, DACs, ASICs, and other wide output swing devices in low power, single-supply systems.

The [AD8613](#) is available in a 5-lead SC70 package and a 5-lead TSOT-23 package. The [AD8617](#) is available in 8-lead MSOP, 8-lead SOIC, and 8-lead LFCSP packages. The [AD8619](#) is available in 14-lead TSSOP and 14-lead SOIC packages. The [AD8617W](#) is qualified for automotive applications and is available in 8-lead MSOP and 8-lead SOIC packages. The [AD8619W](#) is qualified for automotive applications and is available in 14-lead SOIC and 14-lead TSSOP packages.

### PIN CONFIGURATIONS




Figure 1. 5-Lead SC70 and 5-Lead TSOT-23





Figure 2. 8-Lead MSOP and 8-Lead SOIC\_N



#### NOTES

- PIN 4 AND THE EXPOSED PAD MUST BE CONNECTED TO V-.

Figure 3. 8-Lead LFCSP\_VD




Figure 4. 14-Lead TSSOP and 14-Lead SOIC

## TABLE OF CONTENTS

|                                |   |
|--------------------------------|---|
| Features .....                 | 1 |
| Applications .....             | 1 |
| General Description .....      | 1 |
| Pin Configurations .....       | 1 |
| Revision History .....         | 2 |
| Specifications .....           | 3 |
| Absolute Maximum Ratings ..... | 5 |

## REVISION HISTORY

### 12/14—Rev. F to Rev. G

|                                              |    |
|----------------------------------------------|----|
| Changes to General Description Section ..... | 1  |
| Changes to Ordering Guide .....              | 15 |

### 4/14—Rev. E to Rev. F

|                                              |    |
|----------------------------------------------|----|
| Changes to General Description Section ..... | 1  |
| Changes to Table 3 .....                     | 5  |
| Changes to Ordering Guide .....              | 15 |
| Added Automotive Products Section .....      | 15 |

### 3/10—Rev. D to Rev. E

|                                      |    |
|--------------------------------------|----|
| Changes to General Description ..... | 1  |
| Changes to Ordering Guide .....      | 15 |

### 3/10—Rev. C to Rev. D

|                                      |    |
|--------------------------------------|----|
| Changes to General Description ..... | 1  |
| Changes to Ordering Guide .....      | 15 |

### 10/09—Rev. B to Rev. C

|                                                                                                                                                                                                             |           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Added 8-Lead LFCSP Package .....                                                                                                                                                                            | Universal |
| Changes to Features Section, Figure 2 Caption, General Description Section, and Figure 3 .....                                                                                                              | 1         |
| Changed $V_S$ to $V_{SY}$ Throughout .....                                                                                                                                                                  | 3         |
| Changes to Input Characteristics, Input Voltage Range Parameter; Dynamic Performance, Settling Time to 0.1% and Phase Margin Parameters; and Noise Performance, Peak-to-Peak Noise Parameter, Table 1 ..... | 3         |
| Changes to Input Characteristics, Input Voltage Range Parameter; Dynamic Performance, Settling Time to 0.1% and Phase Margin Parameters; and Noise Performance, Peak-to-Peak Noise Parameter, Table 2 ..... | 4         |
| Changes to Table 3 and Table 4 .....                                                                                                                                                                        | 5         |
| Changes to Figure 12 to Figure 15 .....                                                                                                                                                                     | 7         |
| Changes to Figure 18 Caption .....                                                                                                                                                                          | 8         |
| Changes to Figure 30 and Figure 31 .....                                                                                                                                                                    | 10        |
| Updated Outline Dimensions .....                                                                                                                                                                            | 12        |
| Added Figure 44; Renumbered Sequentially .....                                                                                                                                                              | 14        |
| Changes to Ordering Guide .....                                                                                                                                                                             | 15        |

|                                           |    |
|-------------------------------------------|----|
| Thermal Resistance .....                  | 5  |
| ESD Caution .....                         | 5  |
| Typical Performance Characteristics ..... | 6  |
| Outline Dimensions .....                  | 12 |
| Ordering Guide .....                      | 15 |
| Automotive Products .....                 | 15 |

### 1/06—Rev. A to Rev. B

|                                  |           |
|----------------------------------|-----------|
| Added AD8613 .....               | Universal |
| Changes to Features .....        | 1         |
| Changes to Table 1 .....         | 3         |
| Changes to Table 2 .....         | 4         |
| Updated Outline Dimensions ..... | 12        |
| Changes to Ordering Guide .....  | 13        |

### 10/05—Rev. 0 to Rev. A

|                                        |           |
|----------------------------------------|-----------|
| Added AD8619 .....                     | Universal |
| Change to Specifications Section ..... | 3         |
| Updated Outline Dimensions .....       | 12        |
| Changes to Ordering Guide .....        | 13        |

### 9/05—Revision 0: Initial Version

## SPECIFICATIONS

Electrical characteristics at  $V_{SY} = 5\text{ V}$ ,  $V_{CM} = V_{SY}/2$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 1.

| Parameter                    | Symbol                   | Conditions                                                                                                                            | Min  | Typ      | Max | Unit                         |
|------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------|------|----------|-----|------------------------------|
| INPUT CHARACTERISTICS        |                          |                                                                                                                                       |      |          |     |                              |
| Offset Voltage               | $V_{OS}$                 | $-0.3\text{ V} < V_{CM} < +5.3\text{ V}$<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ , $-0.3\text{ V} < V_{CM} < +5.2\text{ V}$ |      | 0.4      | 2.2 | mV                           |
| Offset Voltage Drift         | $\Delta V_{OS}/\Delta T$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                                        |      | 1        | 2.2 | $\mu\text{V}/^\circ\text{C}$ |
| AD8613<br>Input Bias Current | $I_B$                    |                                                                                                                                       |      | 2.5      | 4.5 | $\mu\text{V}/^\circ\text{C}$ |
|                              |                          |                                                                                                                                       |      | 0.2      | 7.0 | $\mu\text{V}/^\circ\text{C}$ |
|                              |                          |                                                                                                                                       |      |          | 1   | pA                           |
|                              |                          | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$                                                                                         |      |          | 110 | pA                           |
|                              |                          | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                                        |      |          | 780 | pA                           |
| Input Offset Current         | $I_{OS}$                 |                                                                                                                                       |      | 0.1      | 0.5 | pA                           |
|                              |                          | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$                                                                                         |      |          | 50  | pA                           |
|                              |                          | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                                        |      |          | 250 | pA                           |
| Input Voltage Range          | IVR                      |                                                                                                                                       | 0    |          | 5   | V                            |
| Common-Mode Rejection Ratio  | CMRR                     | $0\text{ V} < V_{CM} < 5\text{ V}$<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                  |      | 95       |     | dB                           |
| Large Signal Voltage Gain    | $A_{VO}$                 | $R_L = 10\text{ k}\Omega$ , $0.5\text{ V} < V_O < 4.5\text{ V}$                                                                       | 68   |          |     | dB                           |
| Input Capacitance            | $C_{DIFF}$               |                                                                                                                                       | 235  | 500      |     | V/mV                         |
|                              | $C_{CM}$                 |                                                                                                                                       |      | 1.9      |     | pF                           |
|                              |                          |                                                                                                                                       |      | 2.5      |     | pF                           |
| OUTPUT CHARACTERISTICS       |                          |                                                                                                                                       |      |          |     |                              |
| Output Voltage High          | $V_{OH}$                 | $I_L = 1\text{ mA}$<br>$-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                    | 4.95 | 4.98     |     | V                            |
|                              |                          |                                                                                                                                       | 4.9  |          |     | V                            |
|                              |                          | $I_L = 10\text{ mA}$<br>$-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                   |      | 4.7      |     | V                            |
|                              |                          |                                                                                                                                       | 4.50 |          |     | V                            |
| Output Voltage Low           | $V_{OL}$                 | $I_L = 1\text{ mA}$<br>$-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                    |      | 20       | 30  | mV                           |
|                              |                          |                                                                                                                                       |      |          | 50  | mV                           |
|                              |                          | $I_L = 10\text{ mA}$<br>$-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                   |      | 190      | 275 | mV                           |
|                              |                          |                                                                                                                                       |      |          | 335 | mV                           |
| Short-Circuit Current        | $I_{SC}$                 |                                                                                                                                       |      | $\pm 80$ |     | mA                           |
| Closed-Loop Output Impedance | $Z_{OUT}$                | $f = 10\text{ kHz}$ , $A_V = 1$                                                                                                       |      | 15       |     | $\Omega$                     |
| POWER SUPPLY                 |                          |                                                                                                                                       |      |          |     |                              |
| Power Supply Rejection Ratio | PSRR                     | $1.8\text{ V} < V_{SY} < 5\text{ V}$<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                | 67   | 94       |     | dB                           |
|                              |                          |                                                                                                                                       | 64   |          |     | dB                           |
| Supply Current/Amplifier     | $I_{SY}$                 | $V_O = V_{SY}/2$<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                    |      | 38       |     | $\mu\text{A}$                |
|                              |                          |                                                                                                                                       |      |          | 50  | $\mu\text{A}$                |
| DYNAMIC PERFORMANCE          |                          |                                                                                                                                       |      |          |     |                              |
| Slew Rate                    | SR                       | $R_L = 10\text{ k}\Omega$                                                                                                             |      | 0.1      |     | V/ $\mu\text{s}$             |
| Settling Time to 0.1%        | $t_s$                    | $G = \pm 1$ , $V_{IN} = 2\text{ V}$ step, $C_L = 20\text{ pF}$ , $R_L = 1\text{ k}\Omega$                                             |      | 23       |     | $\mu\text{s}$                |
| Gain Bandwidth Product       | GBP                      | $R_L = 100\text{ k}\Omega$                                                                                                            |      | 400      |     | kHz                          |
|                              |                          | $R_L = 10\text{ k}\Omega$                                                                                                             |      | 350      |     | kHz                          |
| Phase Margin                 | $\angle M$               | $R_L = 10\text{ k}\Omega$ , $R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$                                                         |      | 70       |     | Degrees                      |
| NOISE PERFORMANCE            |                          |                                                                                                                                       |      |          |     |                              |
| Peak-to-Peak Noise           | $e_n\text{ p-p}$         | 0.1 Hz to 10 Hz                                                                                                                       |      | 2.3      | 3.5 | $\mu\text{V}$                |
| Voltage Noise Density        | $e_n$                    | $f = 1\text{ kHz}$                                                                                                                    |      | 25       |     | nV/ $\sqrt{\text{Hz}}$       |
|                              |                          | $f = 10\text{ kHz}$                                                                                                                   |      | 22       |     | nV/ $\sqrt{\text{Hz}}$       |
| Current Noise Density        | $i_n$                    | $f = 1\text{ kHz}$                                                                                                                    |      | 0.05     |     | pA/ $\sqrt{\text{Hz}}$       |

Electrical characteristics at  $V_{SY} = 1.8\text{ V}$ ,  $V_{CM} = V_{SY}/2$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 2.

| Parameter                     | Symbol                   | Conditions                                                                                                                         | Min  | Typ     | Max | Unit                         |
|-------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|------|---------|-----|------------------------------|
| <b>INPUT CHARACTERISTICS</b>  |                          |                                                                                                                                    |      |         |     |                              |
| Offset Voltage                | $V_{OS}$                 | $-0.3\text{ V} < V_{CM} < +1.9\text{ V}$<br>$-0.3\text{ V} < V_{CM} < +1.8\text{ V}; -40^\circ\text{C} < T_A < +125^\circ\text{C}$ |      | 0.4     | 2.2 | mV                           |
| Offset Voltage Drift          | $\Delta V_{OS}/\Delta T$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                                     |      | 1       | 8.5 | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current            | $I_B$                    |                                                                                                                                    |      | 3.7     | 9.0 | $\mu\text{V}/^\circ\text{C}$ |
|                               |                          |                                                                                                                                    |      | 0.2     | 1   | pA                           |
|                               |                          | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$                                                                                      |      |         | 110 | pA                           |
|                               |                          | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                                     |      |         | 780 | pA                           |
| Input Offset Current          | $I_{OS}$                 |                                                                                                                                    |      | 0.1     | 0.5 | pA                           |
|                               |                          | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$                                                                                      |      |         | 50  | pA                           |
|                               |                          | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                                     |      |         | 250 | pA                           |
| Input Voltage Range           | IVR                      |                                                                                                                                    | 0    |         | 1.8 | V                            |
| Common-Mode Rejection Ratio   | CMRR                     | $0\text{ V} < V_{CM} < 1.8\text{ V}$<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                             | 58   | 86      |     | dB                           |
| Large Signal Voltage Gain     | $A_{VO}$                 | $R_L = 10\text{ k}\Omega$ , $0.5\text{ V} < V_O < 1.3\text{ V}$                                                                    | 55   |         |     | dB                           |
| Input Capacitance             | $C_{DIFF}$<br>$C_{CM}$   |                                                                                                                                    | 85   | 1000    |     | V/mV                         |
|                               |                          |                                                                                                                                    |      | 2.1     |     | pF                           |
|                               |                          |                                                                                                                                    |      | 3.8     |     | pF                           |
| <b>OUTPUT CHARACTERISTICS</b> |                          |                                                                                                                                    |      |         |     |                              |
| Output Voltage High           | $V_{OH}$                 | $I_L = 1\text{ mA}$<br>$-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                 | 1.65 | 1.73    |     | V                            |
|                               |                          |                                                                                                                                    | 1.6  |         |     | V                            |
| Output Voltage Low            | $V_{OL}$                 | $I_L = 1\text{ mA}$<br>$-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                 |      | 44      | 60  | mV                           |
|                               |                          |                                                                                                                                    |      |         | 80  | mV                           |
| Short-Circuit Current         | $I_{SC}$                 |                                                                                                                                    |      | $\pm 7$ |     | mA                           |
| Closed-Loop Output Impedance  | $Z_{OUT}$                | $f = 10\text{ kHz}$ , $A_V = 1$                                                                                                    |      | 15      |     | $\Omega$                     |
| <b>POWER SUPPLY</b>           |                          |                                                                                                                                    |      |         |     |                              |
| Power Supply Rejection Ratio  | PSRR                     | $1.8\text{ V} < V_S < 5\text{ V}$                                                                                                  | 67   | 94      |     | dB                           |
| Supply Current/Amplifier      | $I_{SY}$                 | $V_O = V_{SY}/2$<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                 |      | 38      |     | $\mu\text{A}$                |
|                               |                          |                                                                                                                                    |      |         | 50  | $\mu\text{A}$                |
| <b>DYNAMIC PERFORMANCE</b>    |                          |                                                                                                                                    |      |         |     |                              |
| Slew Rate                     | SR                       | $R_L = 10\text{ k}\Omega$                                                                                                          |      | 0.1     |     | V/ $\mu\text{s}$             |
| Settling Time to 0.1%         | $t_s$                    | $G = \pm 1$ , $V_{IN} = 1\text{ V}$ step, $C_L = 20\text{ pF}$ , $R_L = 1\text{ k}\Omega$                                          |      | 6.5     |     | $\mu\text{s}$                |
| Gain Bandwidth Product        | GBP                      | $R_L = 100\text{ k}\Omega$                                                                                                         |      | 400     |     | kHz                          |
|                               |                          | $R_L = 10\text{ k}\Omega$                                                                                                          |      | 350     |     | kHz                          |
| Phase Margin                  | $\angle_M$               | $R_L = 10\text{ k}\Omega$ , $R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$                                                      |      | 70      |     | Degrees                      |
| <b>NOISE PERFORMANCE</b>      |                          |                                                                                                                                    |      |         |     |                              |
| Peak-to-Peak Noise            | $e_n\text{ p-p}$         | 0.1 Hz to 10 Hz                                                                                                                    |      | 2.3     | 3.5 | $\mu\text{V}$                |
| Voltage Noise Density         | $e_n$                    | $f = 1\text{ kHz}$                                                                                                                 |      | 25      |     | nV/ $\sqrt{\text{Hz}}$       |
|                               |                          | $f = 10\text{ kHz}$                                                                                                                |      | 22      |     | nV/ $\sqrt{\text{Hz}}$       |
| Current Noise Density         | $i_n$                    | $f = 1\text{ kHz}$                                                                                                                 |      | 0.05    |     | pA/ $\sqrt{\text{Hz}}$       |

## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 3.

| Parameter                            | Rating                                             |
|--------------------------------------|----------------------------------------------------|
| Supply Voltage                       | 6 V                                                |
| Input Voltage                        | $V_{SS} - 0.3\text{ V}$ to $V_{DD} + 0.3\text{ V}$ |
| Input Current                        | $\pm 10\text{ mA}$                                 |
| Differential Input Voltage           | $\pm 6\text{ V}$                                   |
| Output Short-Circuit Duration to GND | Indefinite                                         |
| Storage Temperature Range            | $-65^\circ\text{C}$ to $+150^\circ\text{C}$        |
| Operating Temperature Range          | $-40^\circ\text{C}$ to $+125^\circ\text{C}$        |
| Junction Temperature Range           | $-65^\circ\text{C}$ to $+150^\circ\text{C}$        |
| Lead Temperature (Soldering, 60 sec) | $300^\circ\text{C}$                                |
| ESD AD8613                           |                                                    |
| HBM                                  | $\pm 4000\text{ V}$                                |
| FICDM                                | $\pm 1000\text{ V}$                                |
| ESD AD8617                           |                                                    |
| HBM                                  | $\pm 3000\text{ V}$                                |
| FICDM                                | $\pm 1000\text{ V}$                                |
| MM                                   | $\pm 100\text{ V}$                                 |
| ESD AD8619                           |                                                    |
| HBM                                  | $\pm 4000\text{ V}$                                |
| FICDM                                | $\pm 1250\text{ V}$                                |
| MM                                   | $\pm 200\text{ V}$                                 |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 4. Thermal Characteristics

| Package Type             | $\theta_{JA}$ | $\theta_{JC}$ | Unit               |
|--------------------------|---------------|---------------|--------------------|
| 5-Lead TSOT-23 (UJ-5)    | 207           | 61            | $^\circ\text{C/W}$ |
| 5-Lead SC70 (KS-5)       | 376           | 126           | $^\circ\text{C/W}$ |
| 8-Lead MSOP (RM-8)       | 210           | 45            | $^\circ\text{C/W}$ |
| 8-Lead SOIC_N (R-8)      | 158           | 43            | $^\circ\text{C/W}$ |
| 8-Lead LFCSP_VD (CP-8-9) | 81            | 20            | $^\circ\text{C/W}$ |
| 14-Lead SOIC_N (R-14)    | 120           | 36            | $^\circ\text{C/W}$ |
| 14-Lead TSSOP (RU-14)    | 180           | 35            | $^\circ\text{C/W}$ |

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS

$V_{SY} = 5\text{ V}$  or  $\pm 2.5\text{ V}$ , unless otherwise noted.

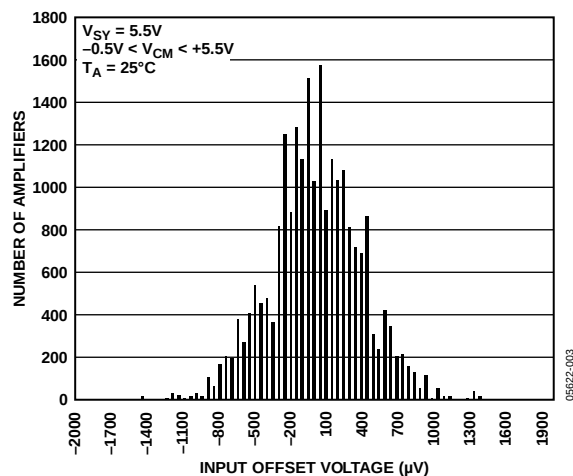


Figure 5. Input Offset Voltage Distribution

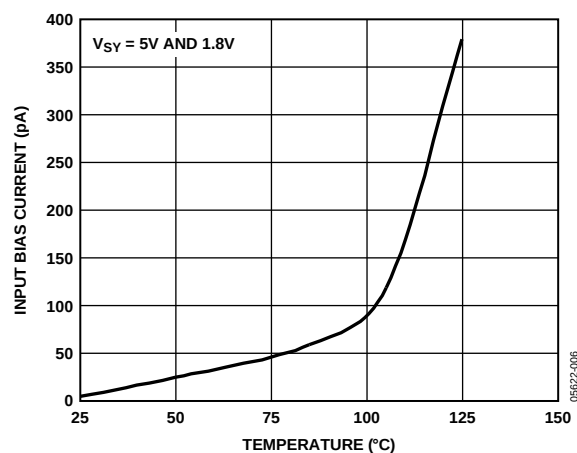


Figure 8. Input Bias Current vs. Temperature

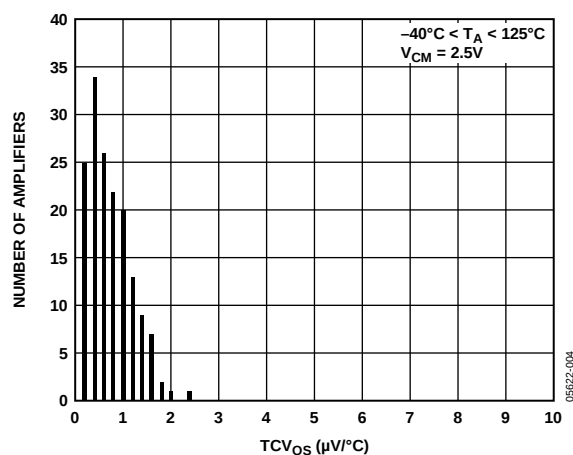


Figure 6. Input Offset Voltage Drift Distribution

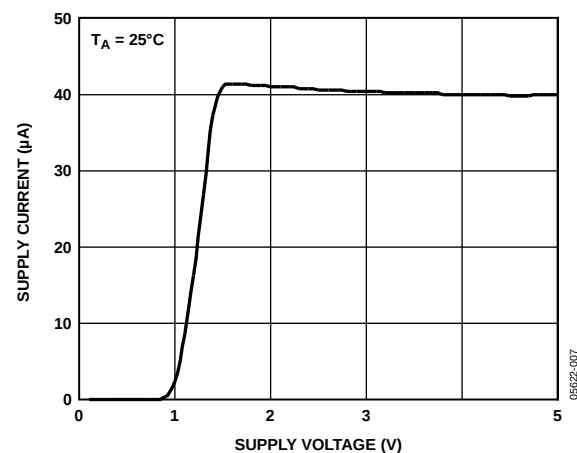


Figure 9. Supply Current vs. Supply Voltage

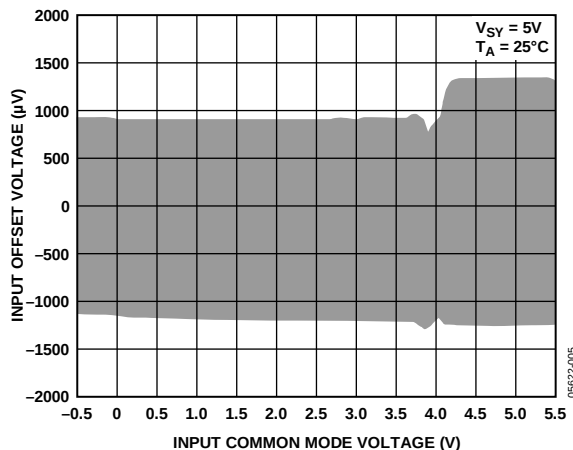


Figure 7. Input Offset Voltage vs. Input Common-Mode Voltage

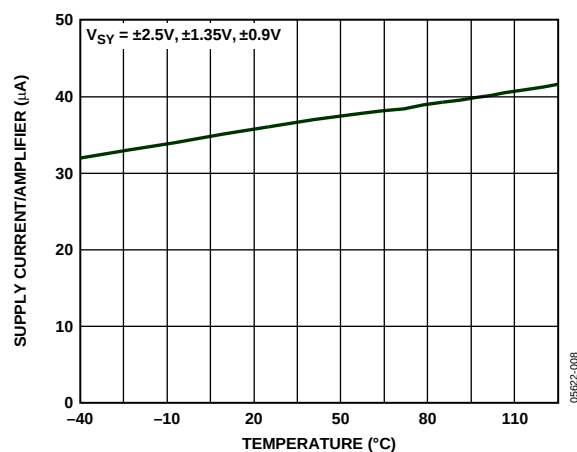


Figure 10. Supply Current vs. Temperature

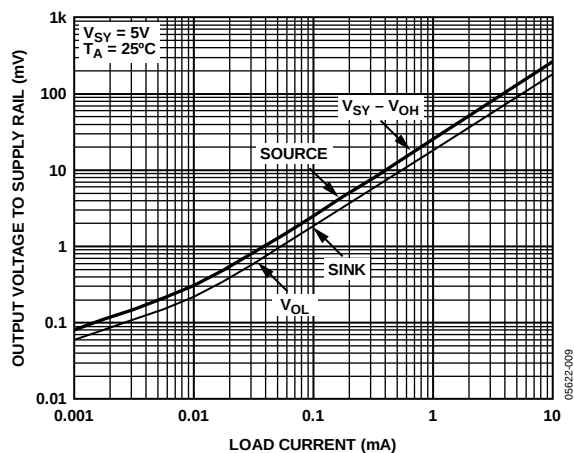


Figure 11. Output Voltage to Supply Rail vs. Load Current

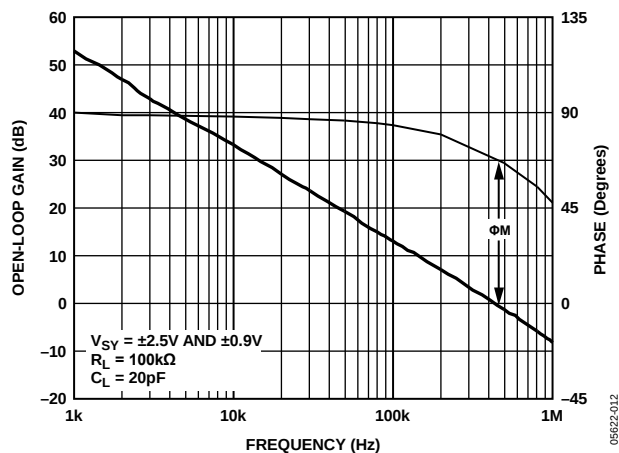


Figure 14. Open-Loop Gain and Phase vs. Frequency

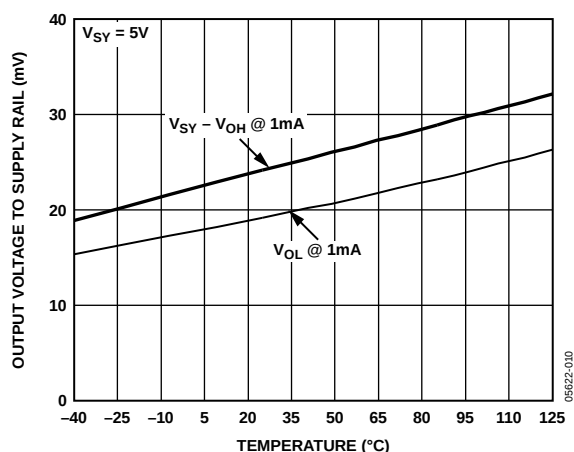
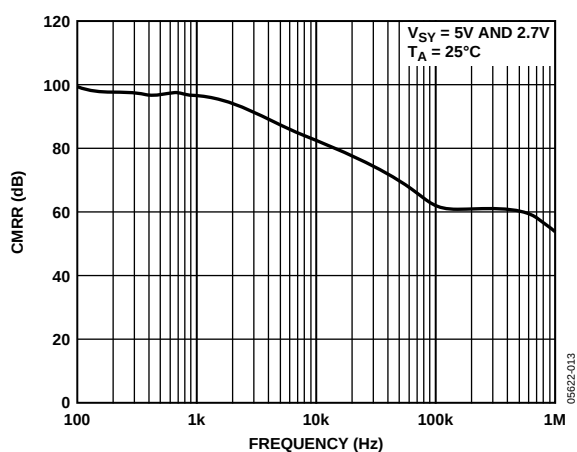
Figure 12. Output Voltage to Supply Rail vs. Temperature ( $I_L = 1mA$ )

Figure 15. CMRR vs. Frequency

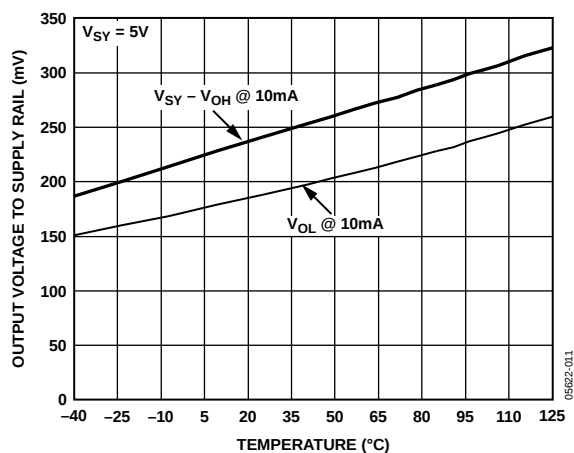
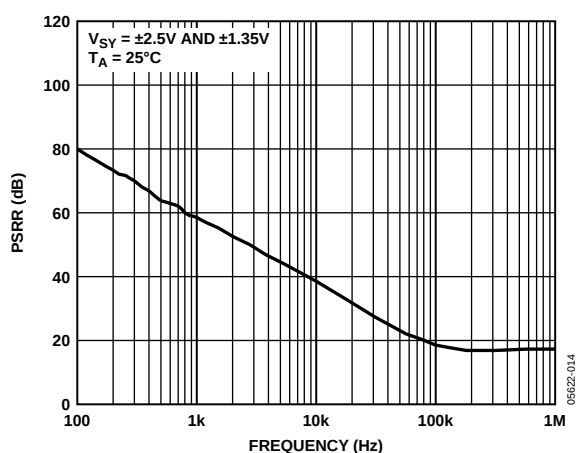
Figure 13. Output Voltage to Supply Rail vs. Temperature ( $I_L = 10mA$ )

Figure 16. PSRR vs. Frequency

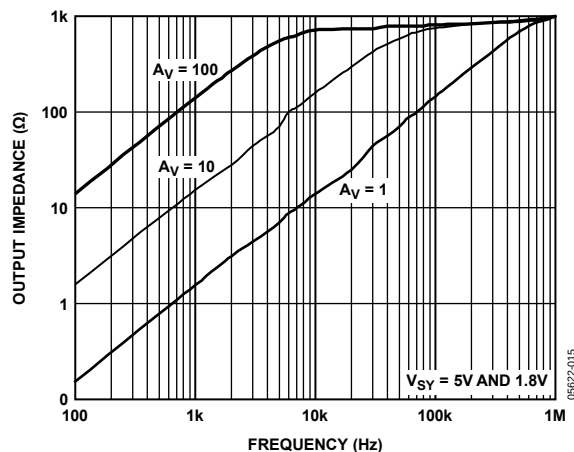


Figure 17. Output Impedance vs. Frequency

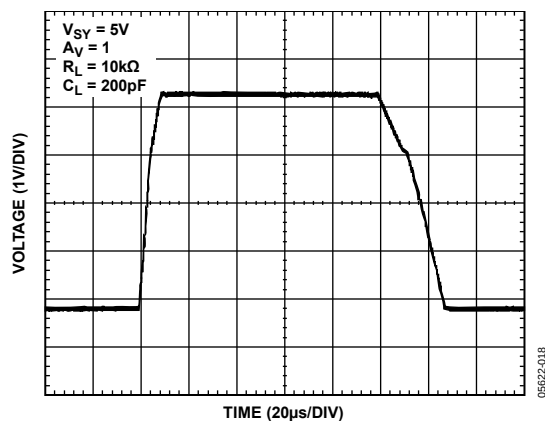


Figure 20. Large Signal Transient Response

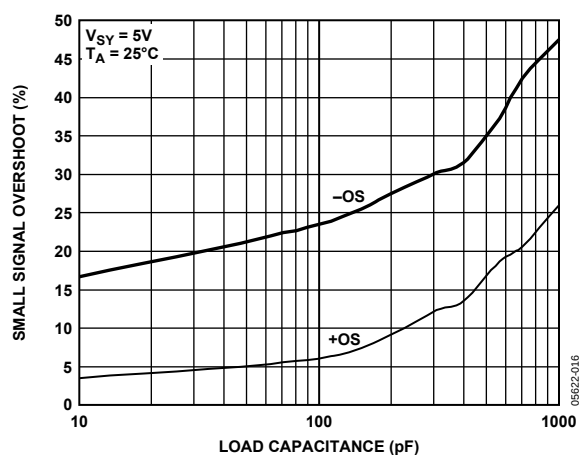


Figure 18. Small Signal Overshoot vs. Load Capacitance

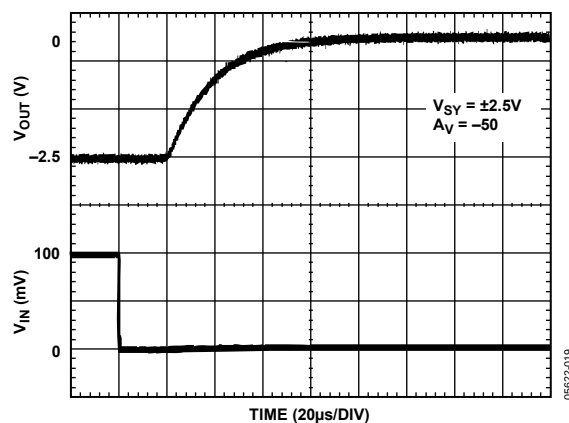


Figure 21. Positive Overload Recovery

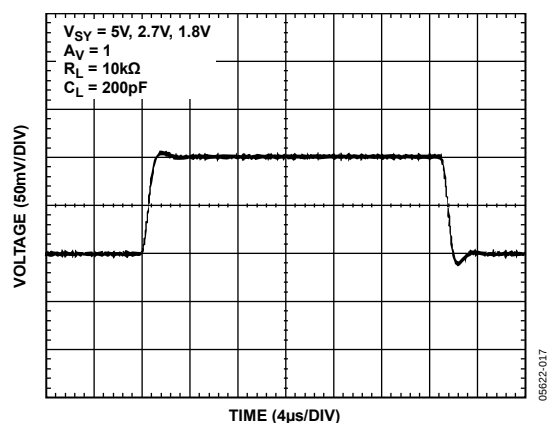


Figure 19. Small Signal Transient Response

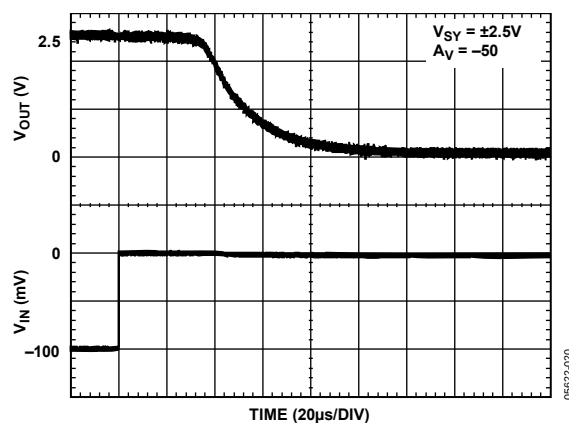


Figure 22. Negative Overload Recovery

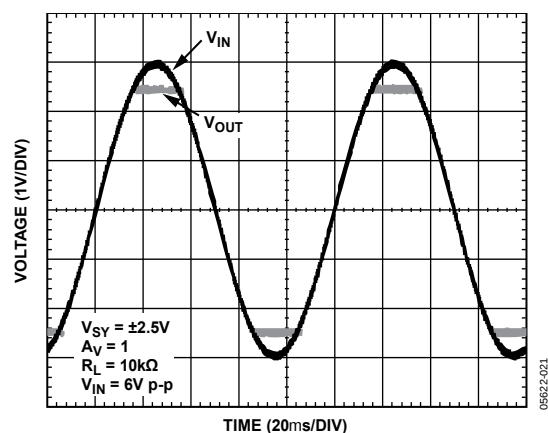


Figure 23. No Phase Reversal

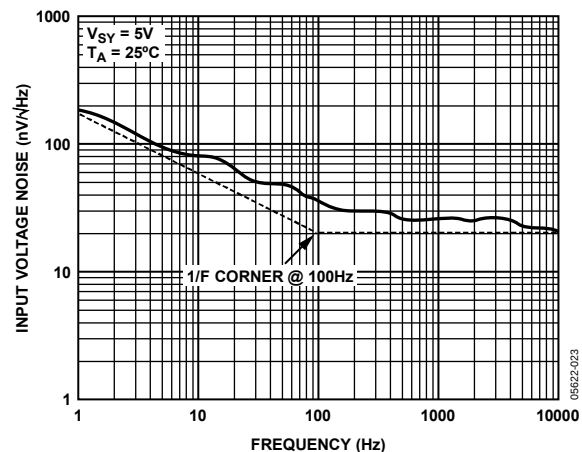


Figure 25. Voltage Noise Density

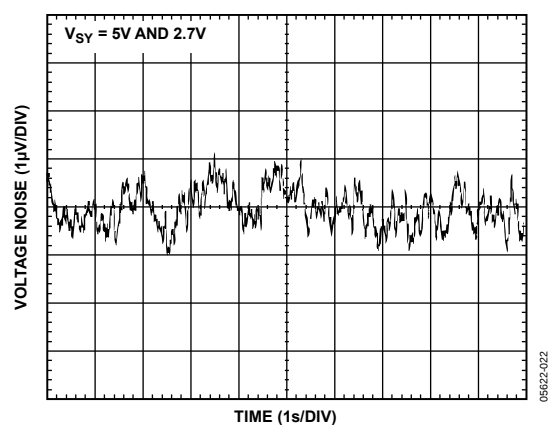


Figure 24. 0.1 Hz to 10 Hz Input Voltage Noise

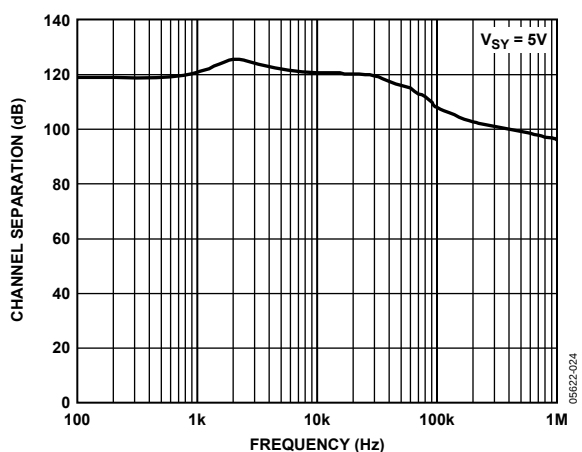


Figure 26. Channel Separation

$V_{SY} = 1.8\text{ V}$  or  $\pm 0.9\text{ V}$ , unless otherwise noted.

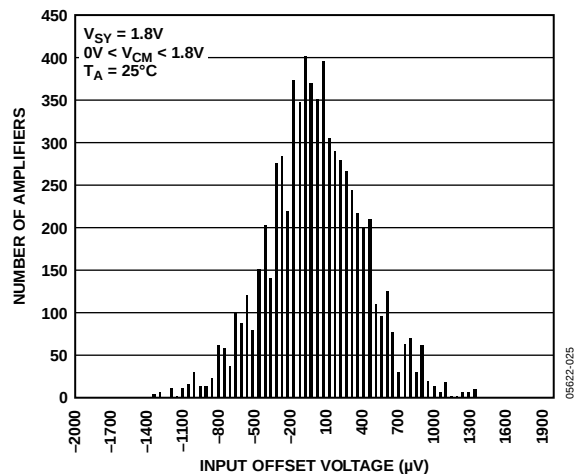


Figure 27. Input Offset Voltage Distribution

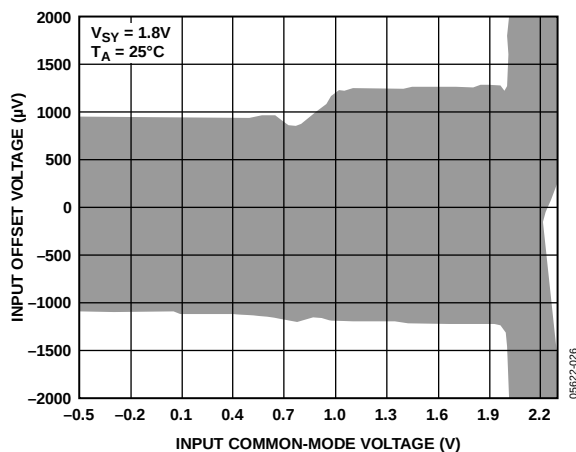


Figure 28. Input Offset Voltage vs. Input Common-Mode Voltage

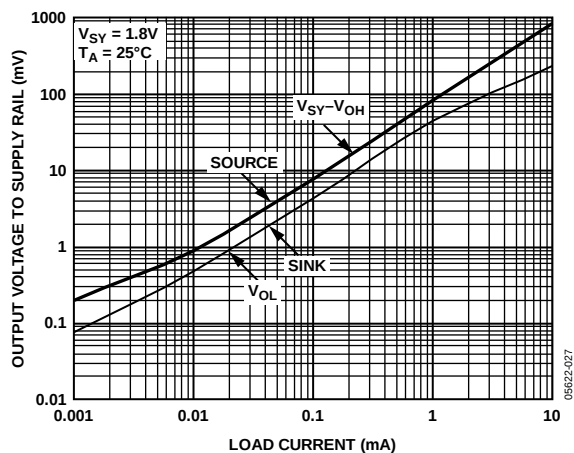


Figure 29. Output Voltage to Supply Rail vs. Load Current

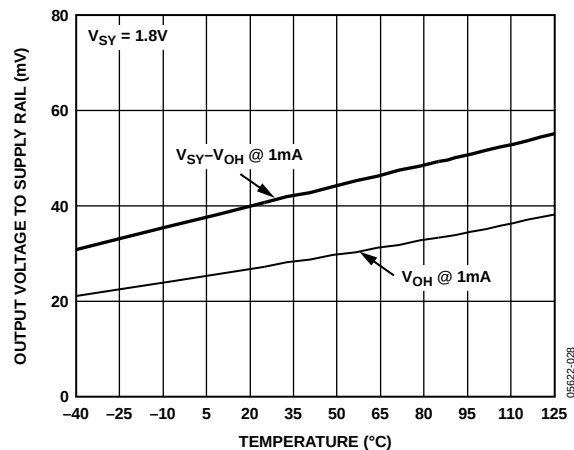


Figure 30. Output Voltage to Supply Rail vs. Temperature  
( $I_L = 1\text{ mA}$ )

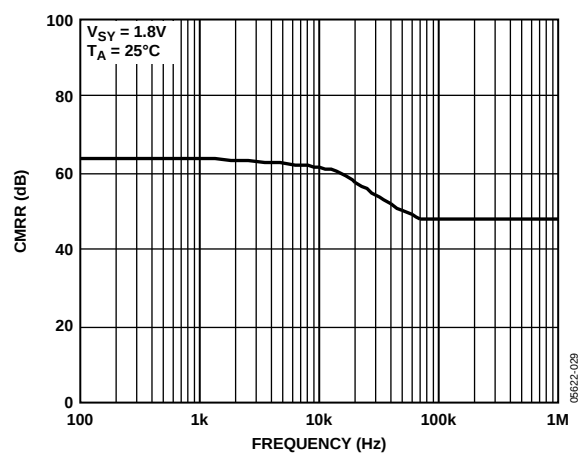


Figure 31. CMRR vs. Frequency

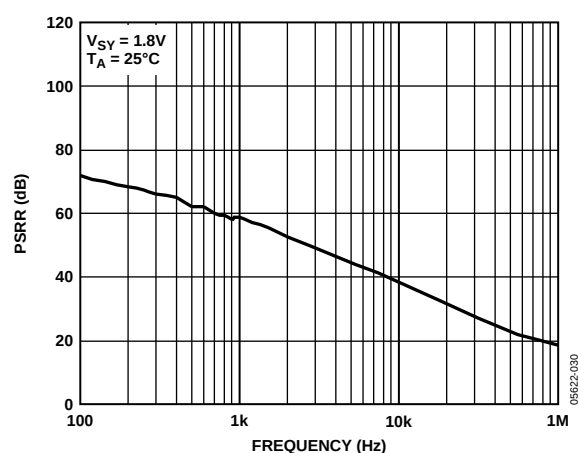


Figure 32. PSRR vs. Frequency

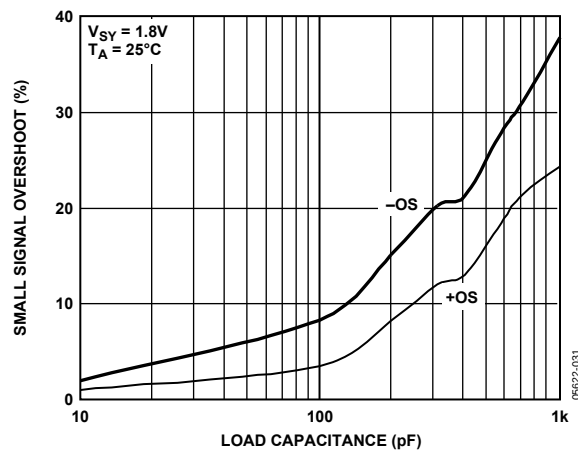


Figure 33. Small Signal Overshoot vs. Load Capacitance

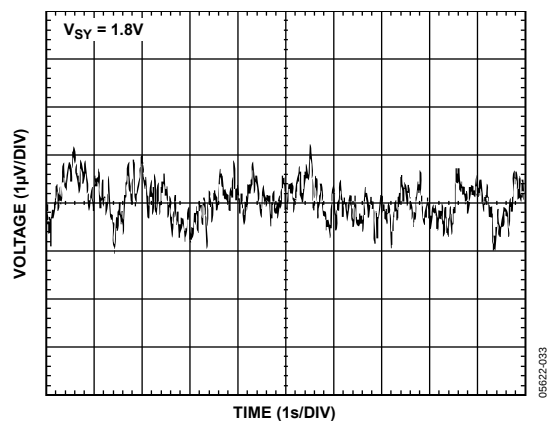


Figure 35. 0.1 Hz to 10 Hz Input Voltage Noise

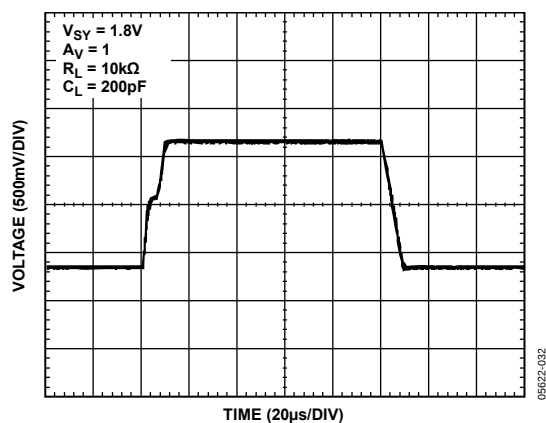


Figure 34. Large Signal Transient Response

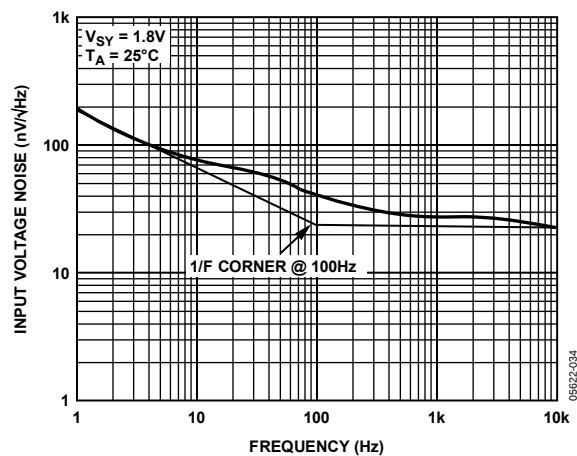


Figure 36. Voltage Noise Density

## OUTLINE DIMENSIONS


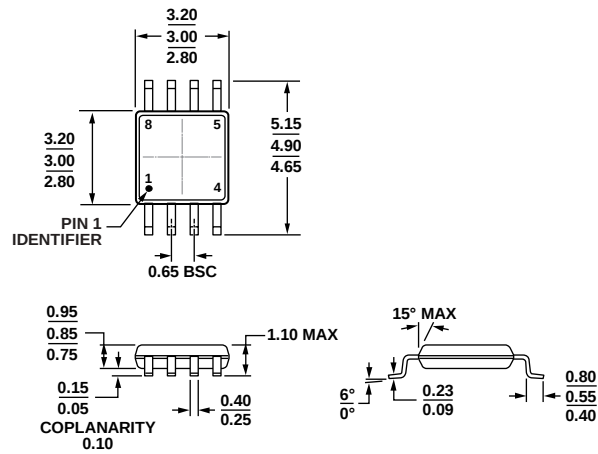


Figure 37. 8-Lead Mini Small Outline Package [MSOP]  
(RM-8)


Dimensions shown in millimeters

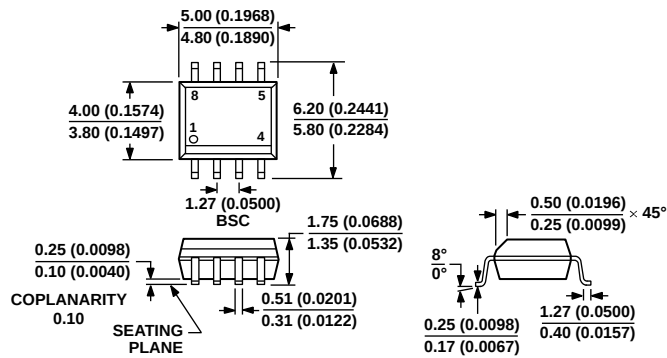

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.


Figure 38. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body (R-8)

Dimensions shown in millimeters and (inches)

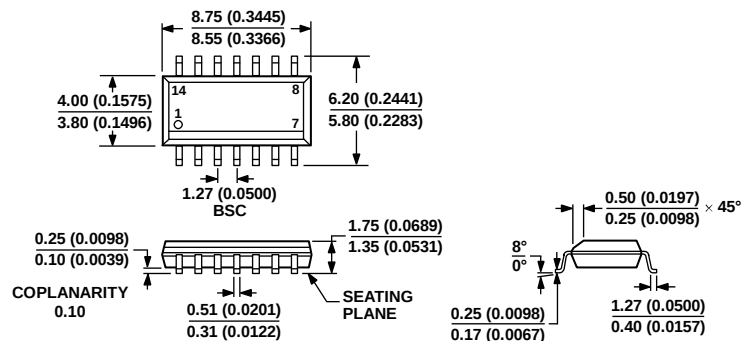


COMPLIANT TO JEDEC STANDARDS MS-012-AB  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 39. 14-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body (R-14)  
Dimensions shown in millimeters and (inches)

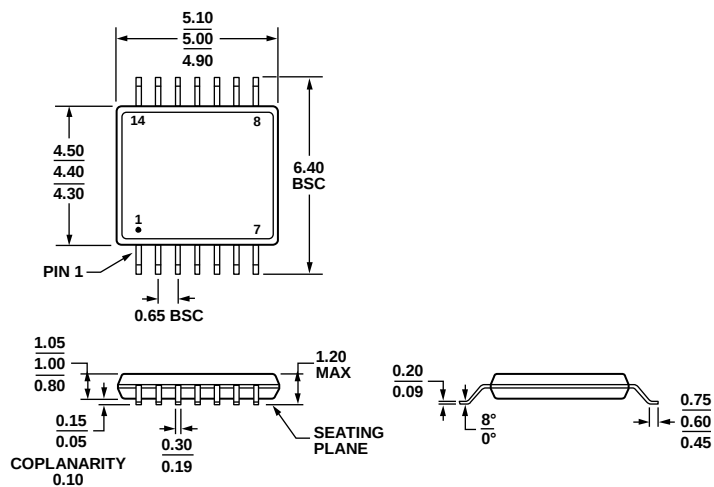

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1


Figure 40. 14-Lead Thin Shrink Small Outline Package [TSSOP]  
(RU-14)  
Dimensions shown in millimeters

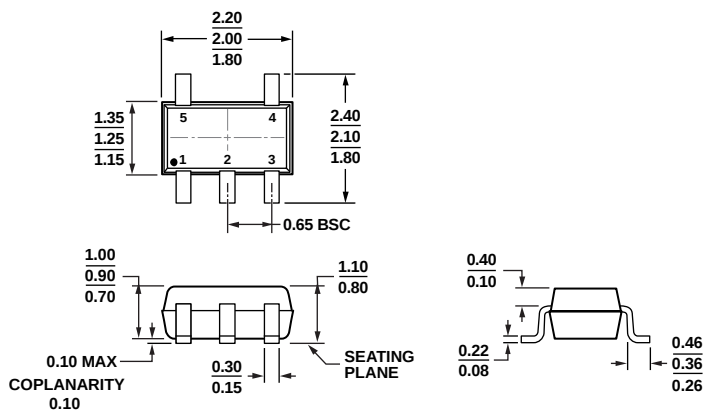

COMPLIANT TO JEDEC STANDARDS MO-203-AA

Figure 41. 5-Lead Thin Shrink Small Outline Transistor Package [SC70]  
(KS-5)

Dimensions shown in millimeters

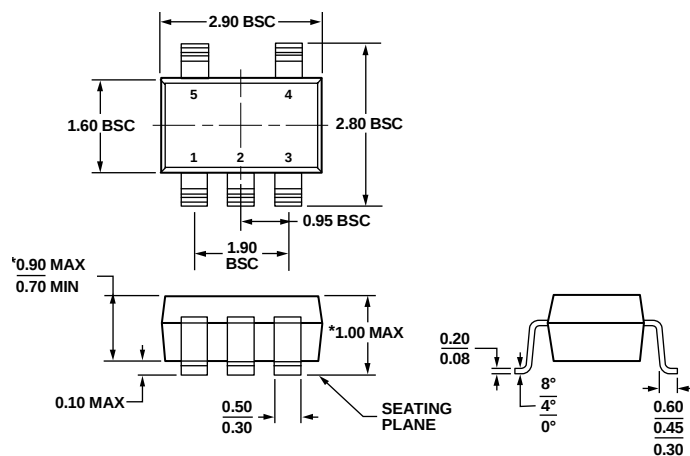

\*COMPLIANT TO JEDEC STANDARDS MO-193-AB WITH  
THE EXCEPTION OF PACKAGE HEIGHT AND THICKNESS.

Figure 42. 5-Lead Thin Small Outline Transistor Package [TSOT-23]  
(UJ-5)

Dimensions shown in millimeters

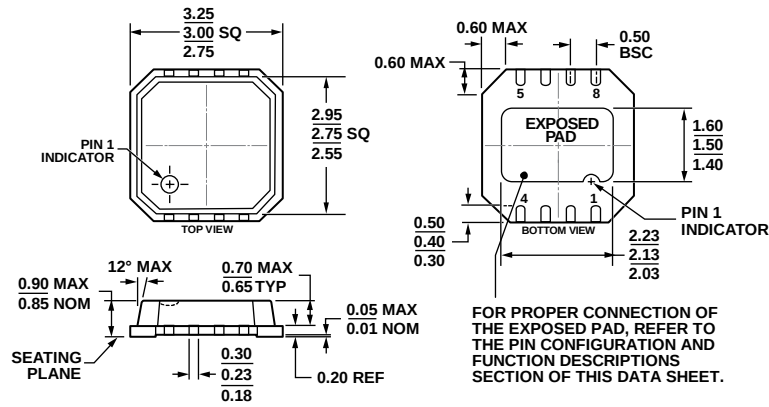


Figure 43. 8-Lead Lead Frame Chip Scale Package [LFCSP\_VD]  
3 mm × 3 mm Body, Very Thin, Dual Lead  
(CP-8-9)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1, 2</sup> | Temperature Range | Package Description | Package Option | Branding |
|-----------------------|-------------------|---------------------|----------------|----------|
| AD8613AKSZ-R2         | −40°C to +125°C   | 5-Lead SC70         | KS-5           | A0Y      |
| AD8613AKSZ-REEL       | −40°C to +125°C   | 5-Lead SC70         | KS-5           | A0Y      |
| AD8613AKSZ-REEL7      | −40°C to +125°C   | 5-Lead SC70         | KS-5           | A0Y      |
| AD8613AUJZ-R2         | −40°C to +125°C   | 5-Lead TSOT-23      | UJ-5           | A0Y      |
| AD8613AUJZ-REEL       | −40°C to +125°C   | 5-Lead TSOT-23      | UJ-5           | A0Y      |
| AD8613AUJZ-REEL7      | −40°C to +125°C   | 5-Lead TSOT-23      | UJ-5           | A0Y      |
| AD8617ACPZ-R2         | −40°C to +125°C   | 8-Lead LFCSP_VD     | CP-8-9         | A0T      |
| AD8617ACPZ-R7         | −40°C to +125°C   | 8-Lead LFCSP_VD     | CP-8-9         | A0T      |
| AD8617ACPZ-RL         | −40°C to +125°C   | 8-Lead LFCSP_VD     | CP-8-9         | A0T      |
| AD8617ARMZ            | −40°C to +125°C   | 8-Lead MSOP         | RM-8           | A0T      |
| AD8617ARMZ-REEL       | −40°C to +125°C   | 8-Lead MSOP         | RM-8           | A0T      |
| AD8617ARZ             | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            | A23      |
| AD8617ARZ-REEL        | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |          |
| AD8617ARZ-REEL7       | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |          |
| AD8617WARMZ-REEL      | −40°C to +125°C   | 8-Lead MSOP         | RM-8           |          |
| AD8617WARZ-RL         | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |          |
| AD8617WARZ-R7         | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |          |
| AD8619ARUZ            | −40°C to +125°C   | 14-Lead TSSOP       | RU-14          |          |
| AD8619ARUZ-REEL       | −40°C to +125°C   | 14-Lead TSSOP       | RU-14          |          |
| AD8619ARZ             | −40°C to +125°C   | 14-Lead SOIC_N      | R-14           |          |
| AD8619ARZ-REEL7       | −40°C to +125°C   | 14-Lead SOIC_N      | R-14           |          |
| AD8619WARZ-RL         | −40°C to +125°C   | 14-Lead SOIC_N      | R-14           |          |
| AD8619WARZ-R7         | −40°C to +125°C   | 14-Lead SOIC_N      | R-14           |          |
| AD8619WARUZ-R7        | −40°C to +125°C   | 14-Lead TSSOP       | RU-14          |          |
| AD8619WARUZ-RL        | −40°C to +125°C   | 14-Lead TSSOP       | RU-14          |          |

<sup>1</sup> Z = RoHS Compliant Part.

<sup>2</sup> Qualified for automotive applications.

## AUTOMOTIVE PRODUCTS

The [AD8617W](#) and [AD8619W](#) models are available with controlled manufacturing to support the quality and reliability requirements of automotive applications. Note that these automotive models may have specifications that differ from the commercial models; therefore, designers should review the Specifications section of this data sheet carefully. Only the automotive grade products shown are available for use in automotive applications. Contact your local Analog Devices account representative for specific product ordering information and to obtain the specific Automotive Reliability reports for these models.

## NOTES

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com