






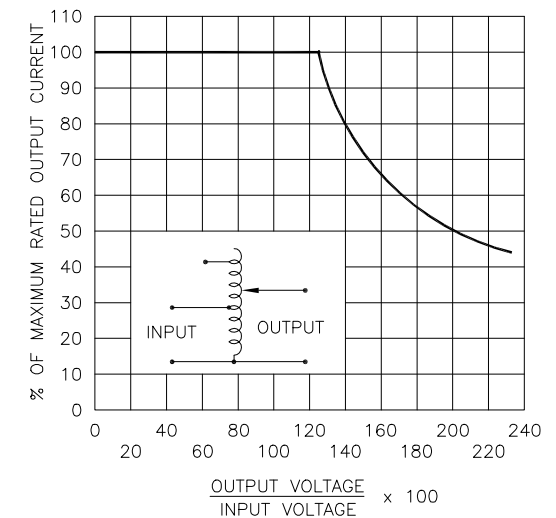


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY
DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER
UNIT OPERATED AT LOWER INPUT VOLTAGE.

MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).

V.D. = VOLTAGE DOUBLER.

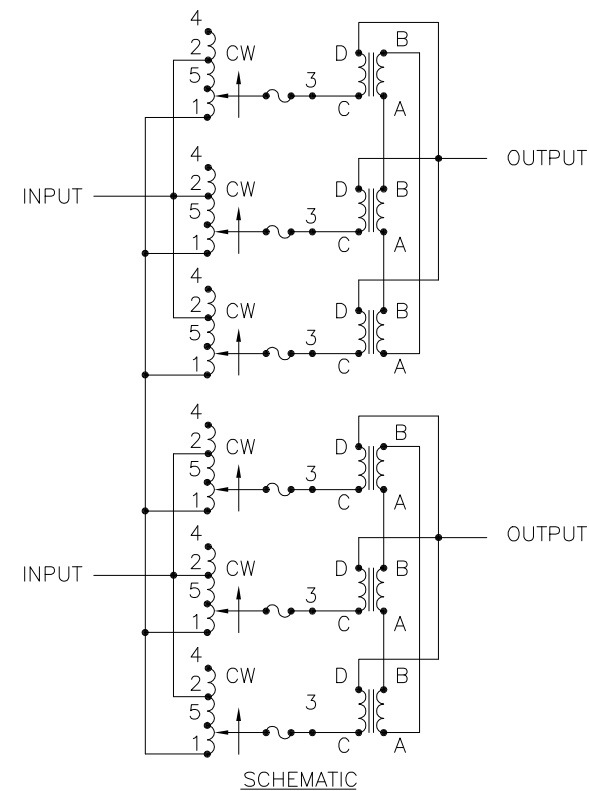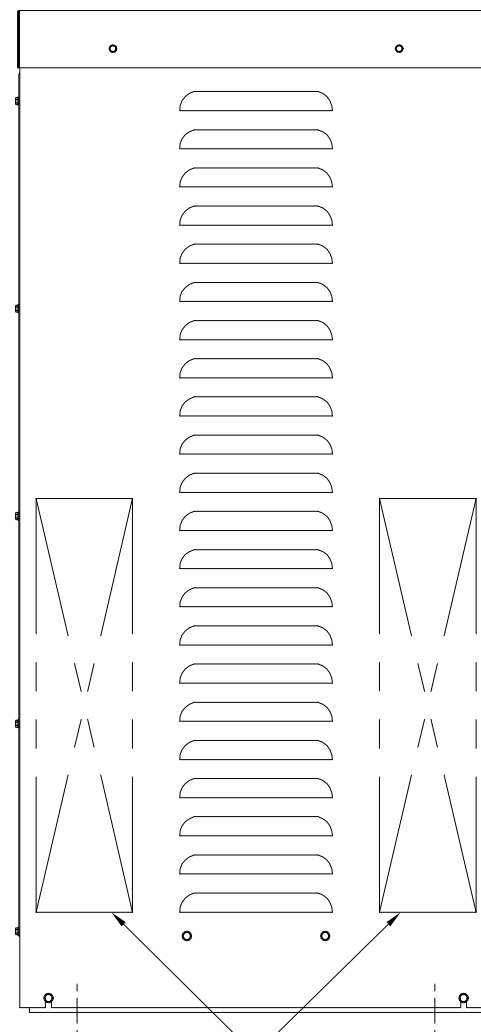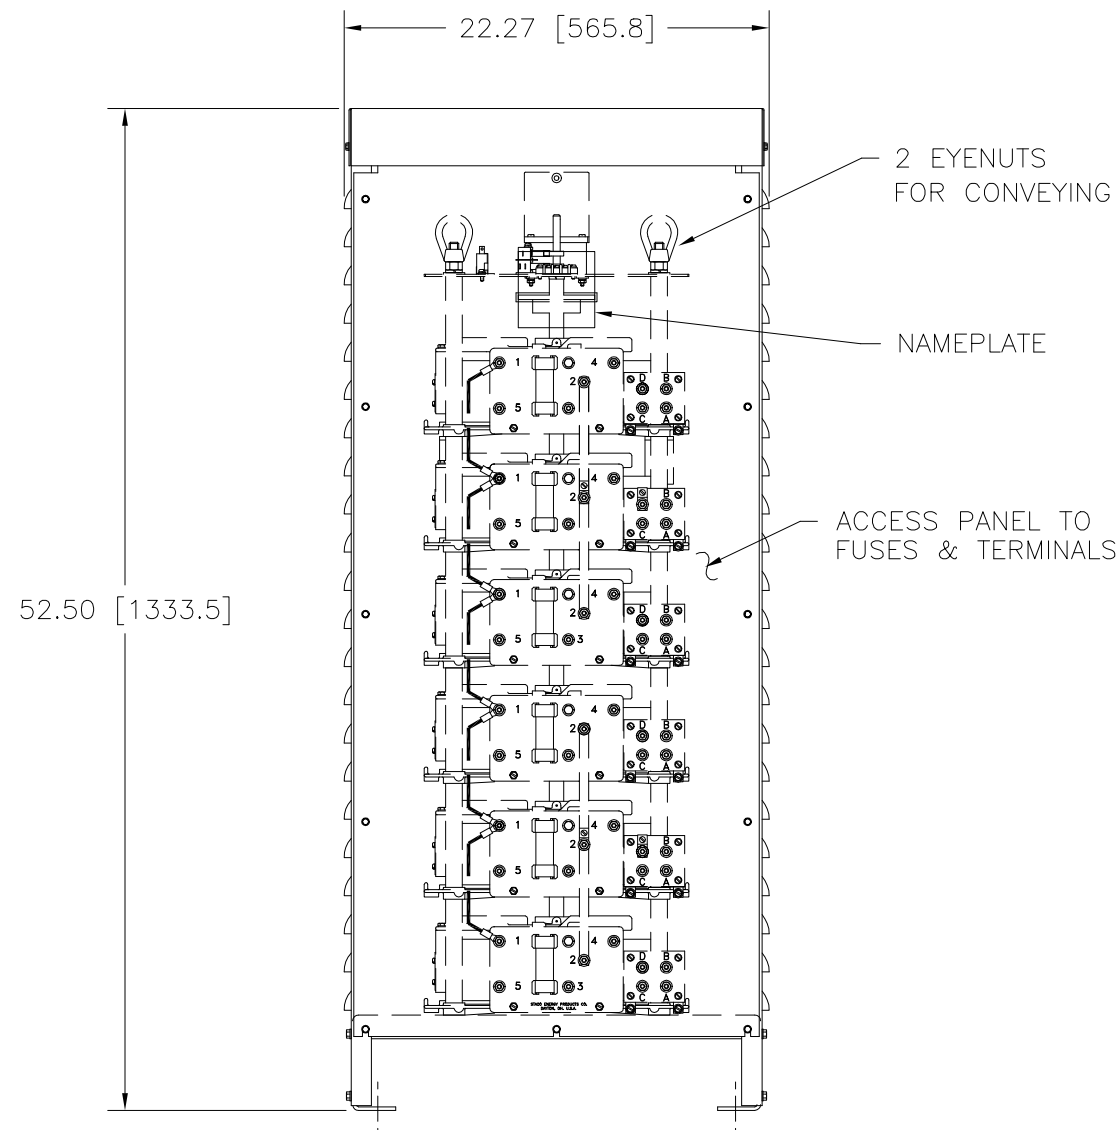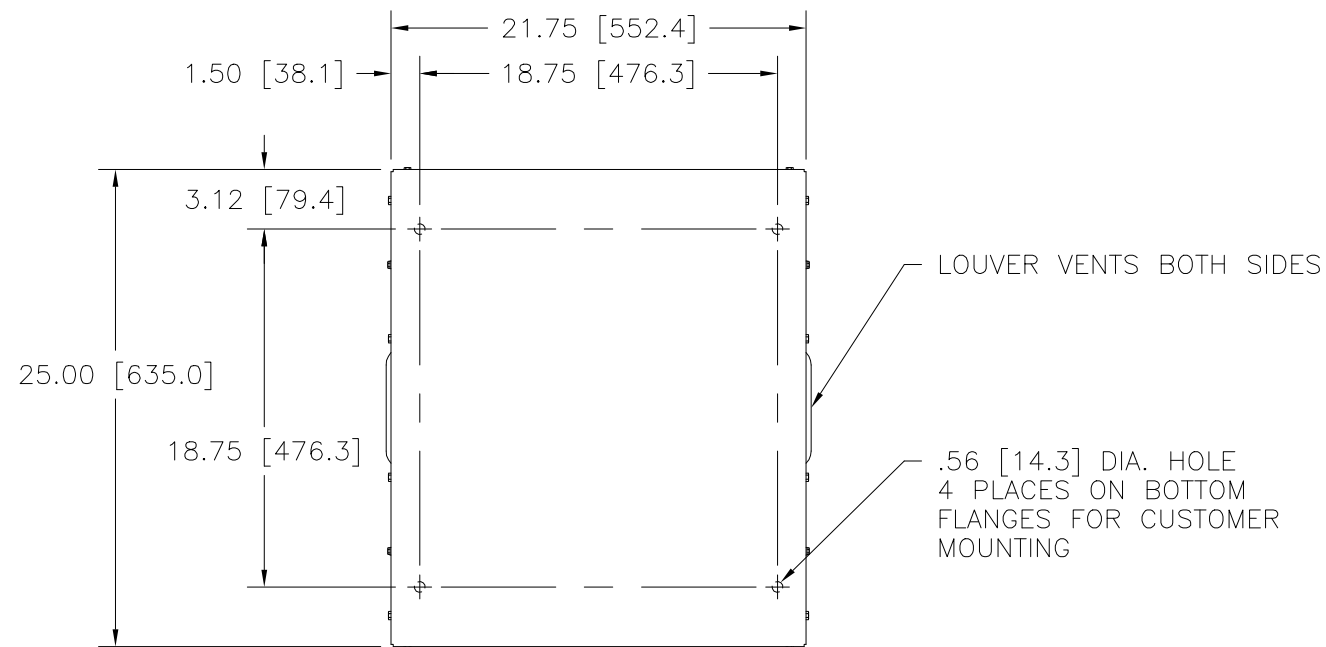

MOTOR CIRCUIT
120V, 50/60 HZ
* ROTATION AS VIEWED
FROM MOTOR END
MOTOR SPEED: SEE CHART

SPEED (SECONDS)	MODEL NUMBER
15	15M6020E-6PS
30	30M6020E-6PS
60	60M6020E-6PS

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT
				MAX. AMPS	MAX. KVA			
SINGLE PHASE SERIES PARALLEL	480	50/60	0-480	105	50.4	CW	4-4	D-D
			0-560	105	58.8	CW	2-2	D-D
	240	50/60	0-560	105 [#] V.D.	25.2 ++	CW	5-5	D-D
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT .XX .0010 .12 .0002 .03 1° 1-1/2° .XXX .005			UNITS IN [mm]		TITLE: SPEC. CONTROL DRAWING MOTORIZED VARIABLE XFMR. M6020E-6PS			
MATERIAL:		ALL DIMENSIONS APPLY AFTER PLATING						
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			DRAWN BY TIM RAU	DATE 11/20/96	FIRST USED ON M6020E-6PS	DO NOT SCALE DWG.	DWG. NO. 032-7832	
			CHECKER	DATE	WEIGHT APPROX.	CAGE CODE 83008		
			ENGINEER	DATE	SCALE .2=1	SHEET 1 OF 1		



STACO ENERGY
PRODUCTS CO.
A Components Corporation of Amerasia Company
303 Gadsden Boulevard Dayton, Ohio 45403 USA

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com