

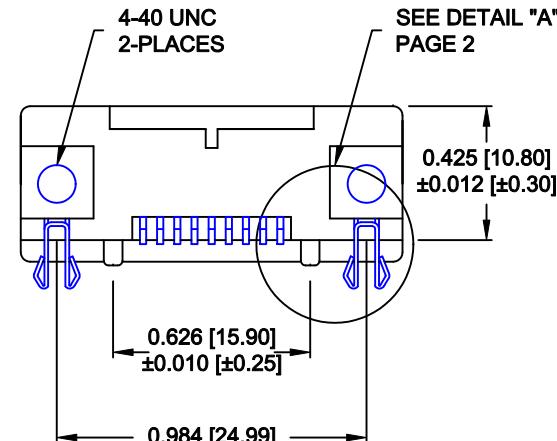
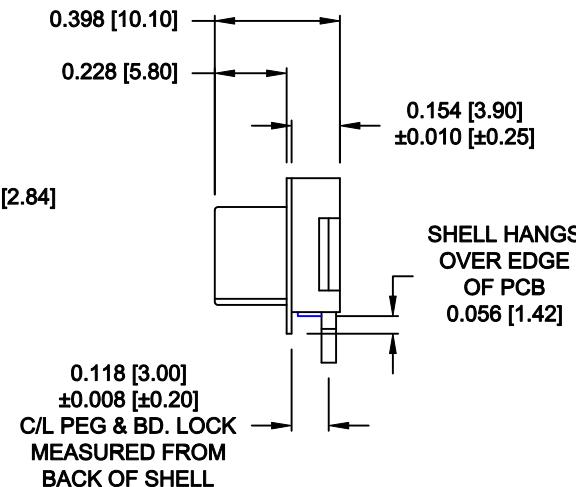
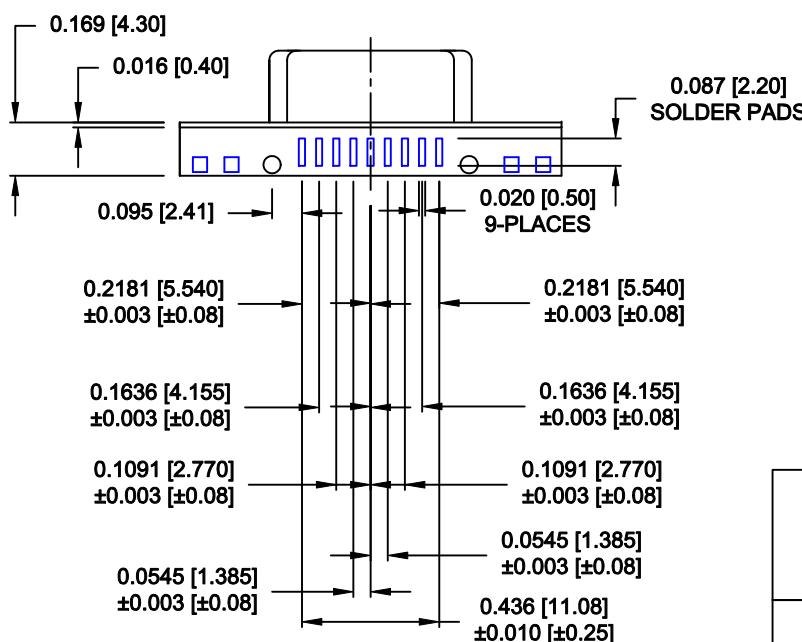


DESCRIPTION: 9 POS - FEMALE - SURFACE MOUNT

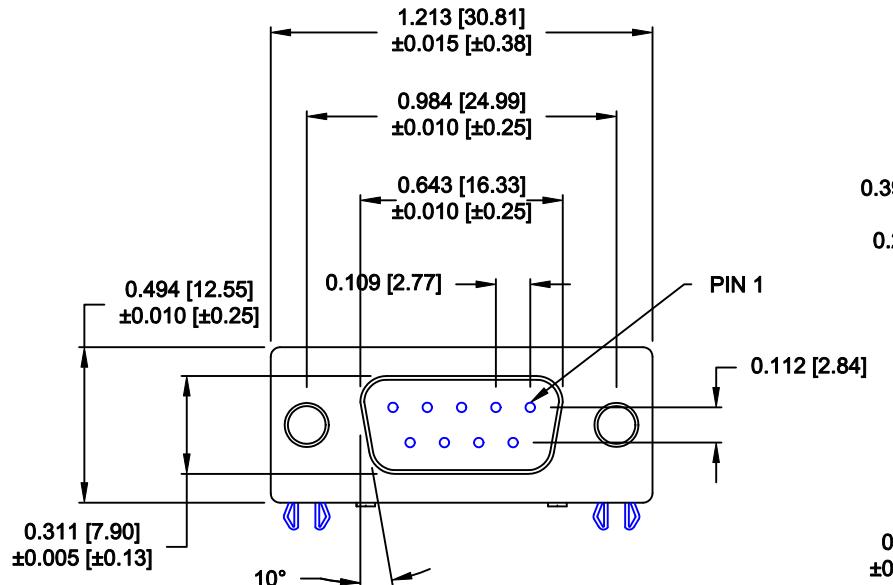

MATERIAL/FINISH:

SHELL: STEEL, NICKEL PLATED
 BRACKET: BRASS, NICKEL PLATED
 INSULATOR: NYLON 6-UL 94V-0, BLACK, (TEMP. RESISTANCE 250° C FOR 60 SEC.)
 INSULATOR: PATONE #322C, COLOR = Pc99
 CONTACT: PHOSPHOR BRONZE, TIN PLATED GOLD FLASH - MATING AREA
 TIN - TERMINATING AREA

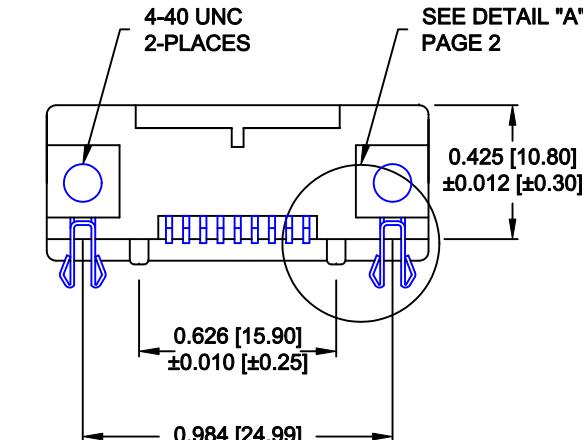

ELECTRICAL:

RATED CURRENT: 5 AMPS
 RATED VOLTAGE: 300VDC
 WITHSTANDING VOLTAGE: 500VAC (rms) FOR 1 Min.
 INSULATION RESISTANCE: > 1,000mOhms AT 500VDC
 CONTACT RESISTANCE: 13mOhms Max.
 DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
 OPERATING TEMPERATURE: -55° ~ +105° C



DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN:	C. SMITH	DATE:
		CHECKED:		DATE:
SCALE:	1.5 : 1	SHEET	1	REV 13
DWG NO.	190-009-263R001			

RoHS COMPLIANT

NorComp

DESCRIPTION: 9 POS PCB LAYOUT - SURFACE MOUNT - FEMALE

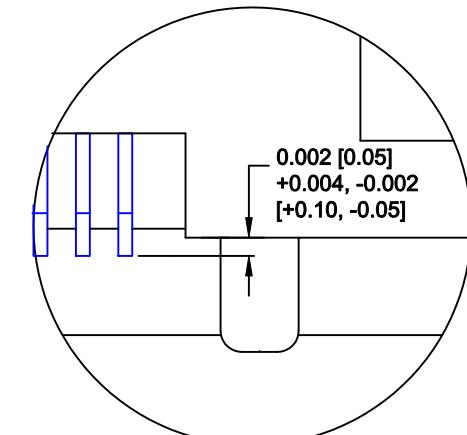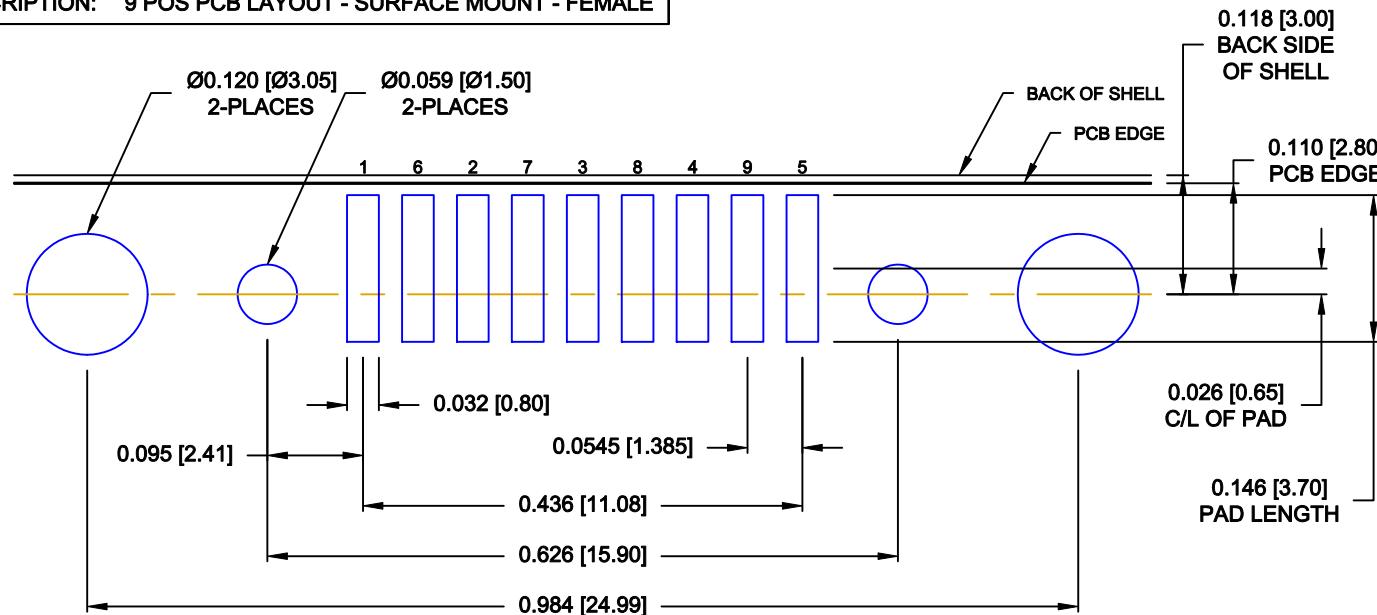


DETAIL "B"
CONTACT COPLANARITY

RECOMMENDED PCB LAYOUT

SCALE = 5 : 1


CONTACT ARRANGEMENT
1 6 2 7 3 8 4 9 5

SEE DETAIL "B"
FOR CONTACT
COPLANARITY

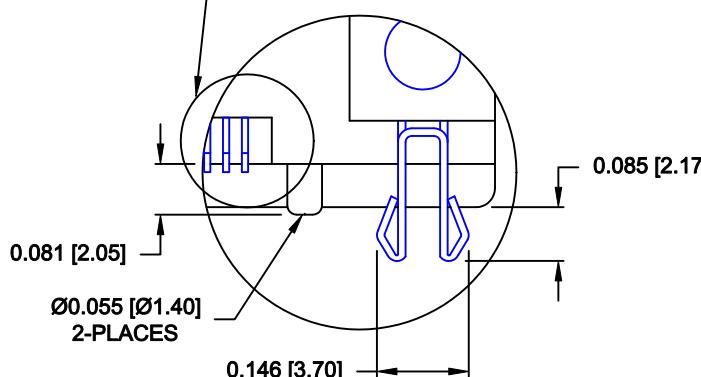

DETAIL "A"

SCALE = 3 : 1

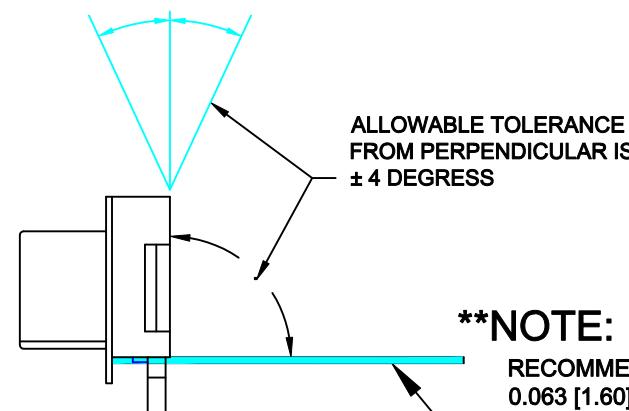

**NOTE:
RECOMMENDED PCB THICKNESS IS
0.063 [1.60] ± 0.002 [0.05] TO MAINTAIN
ANGLE TOLERANCE

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN:	C. SMITH	DATE:	03-30-09
		CHECKED:		DATE:	
SCALE:	6 : 1	SHEET	2	OF	2
DWG NO.	190-009-263R001				

NorComp

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com