


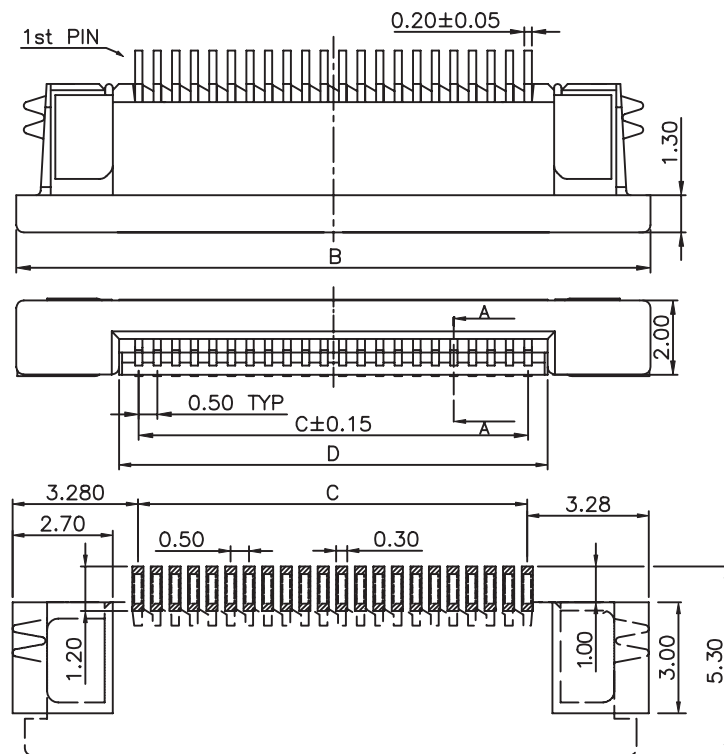
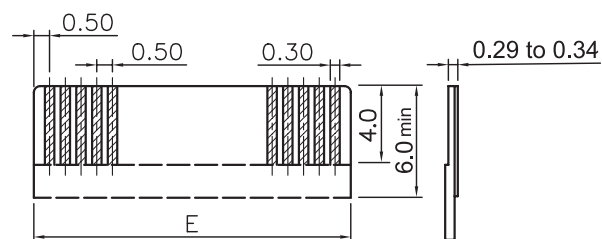


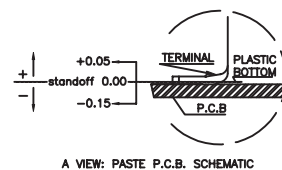

RECOMMENDED PCB LAYOUT - COMPONENT VIEW



APPLICABLE FFC LAYOUT



A VIEW: PASTE P.C.B. SCHEMATIC

MATERIAL:
HOUSING MATERIAL: LCP
COLOR: IVORY
ACTUATOR MATERIAL: LCP
COLOR: BLACK
CONTACT MATERIAL: PHOSPOR BRONZE
CONTACT PLATING: 100µ" TIN OVER 50µ" NI
QUALITY CLASS: 25 MATING CYCLES*


ENVIRONNEMENTAL:
OPERATING TEMPERATURE: -25°C UP TO 85°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL:
CURRENT RATING: 0.5A
WORKING VOLTAGE: 50V
INSULATION RESISTANCE: >100MOHM
DIELECTRIC WITHSTANDING VOLT.: 250VAC/MN
CONTACT RESISTANCE: 20mOHM MAX

STANDARD
CERTIFIED: E323964 / MODEL NUMBER 687
FOLLOWED BY 1, FOLLOWED BY 04 THRU 50, FOLLOWED
BY 140 OR 145, FOLLOWED BY NUMERIC DIGITS


SOLDERING:
REFLOW PROCESS ONLY

DIMENSION:
B = 0.5 x NB PINS + 6.4
C = 0.5 x (NB PINS - 1)
D = 0.5 x (NB PINS + 1) + 0.1
E = 0.5 x (NB PINS + 1)


RoHS Compliant		*NOTE: theoretical value related to the Tin plating; however, due to the sensitive actuator, we recommend not to make more than 1 or 2 cycles in order to maintain acceptable mechanical & electrical conditions		PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15		
		APPROVAL: RJ		UNIT: MM SCALE: SHEET: 1/3 DRAW: PEARL	DESCRIPTION: 0.5MM ZIF FPC HORIZONTAL BOTTOM CONTACT TYPE - TAPE & REEL PACKAGING WERI PART NO: 6871 xx 14522		SIZE A4
I	13-DEC-13	TPK UPDATE	QL				
H	23-JAN-13	UNIT $\mu \Rightarrow \mu''$	QL				
REV	DATE	FILE	BY				

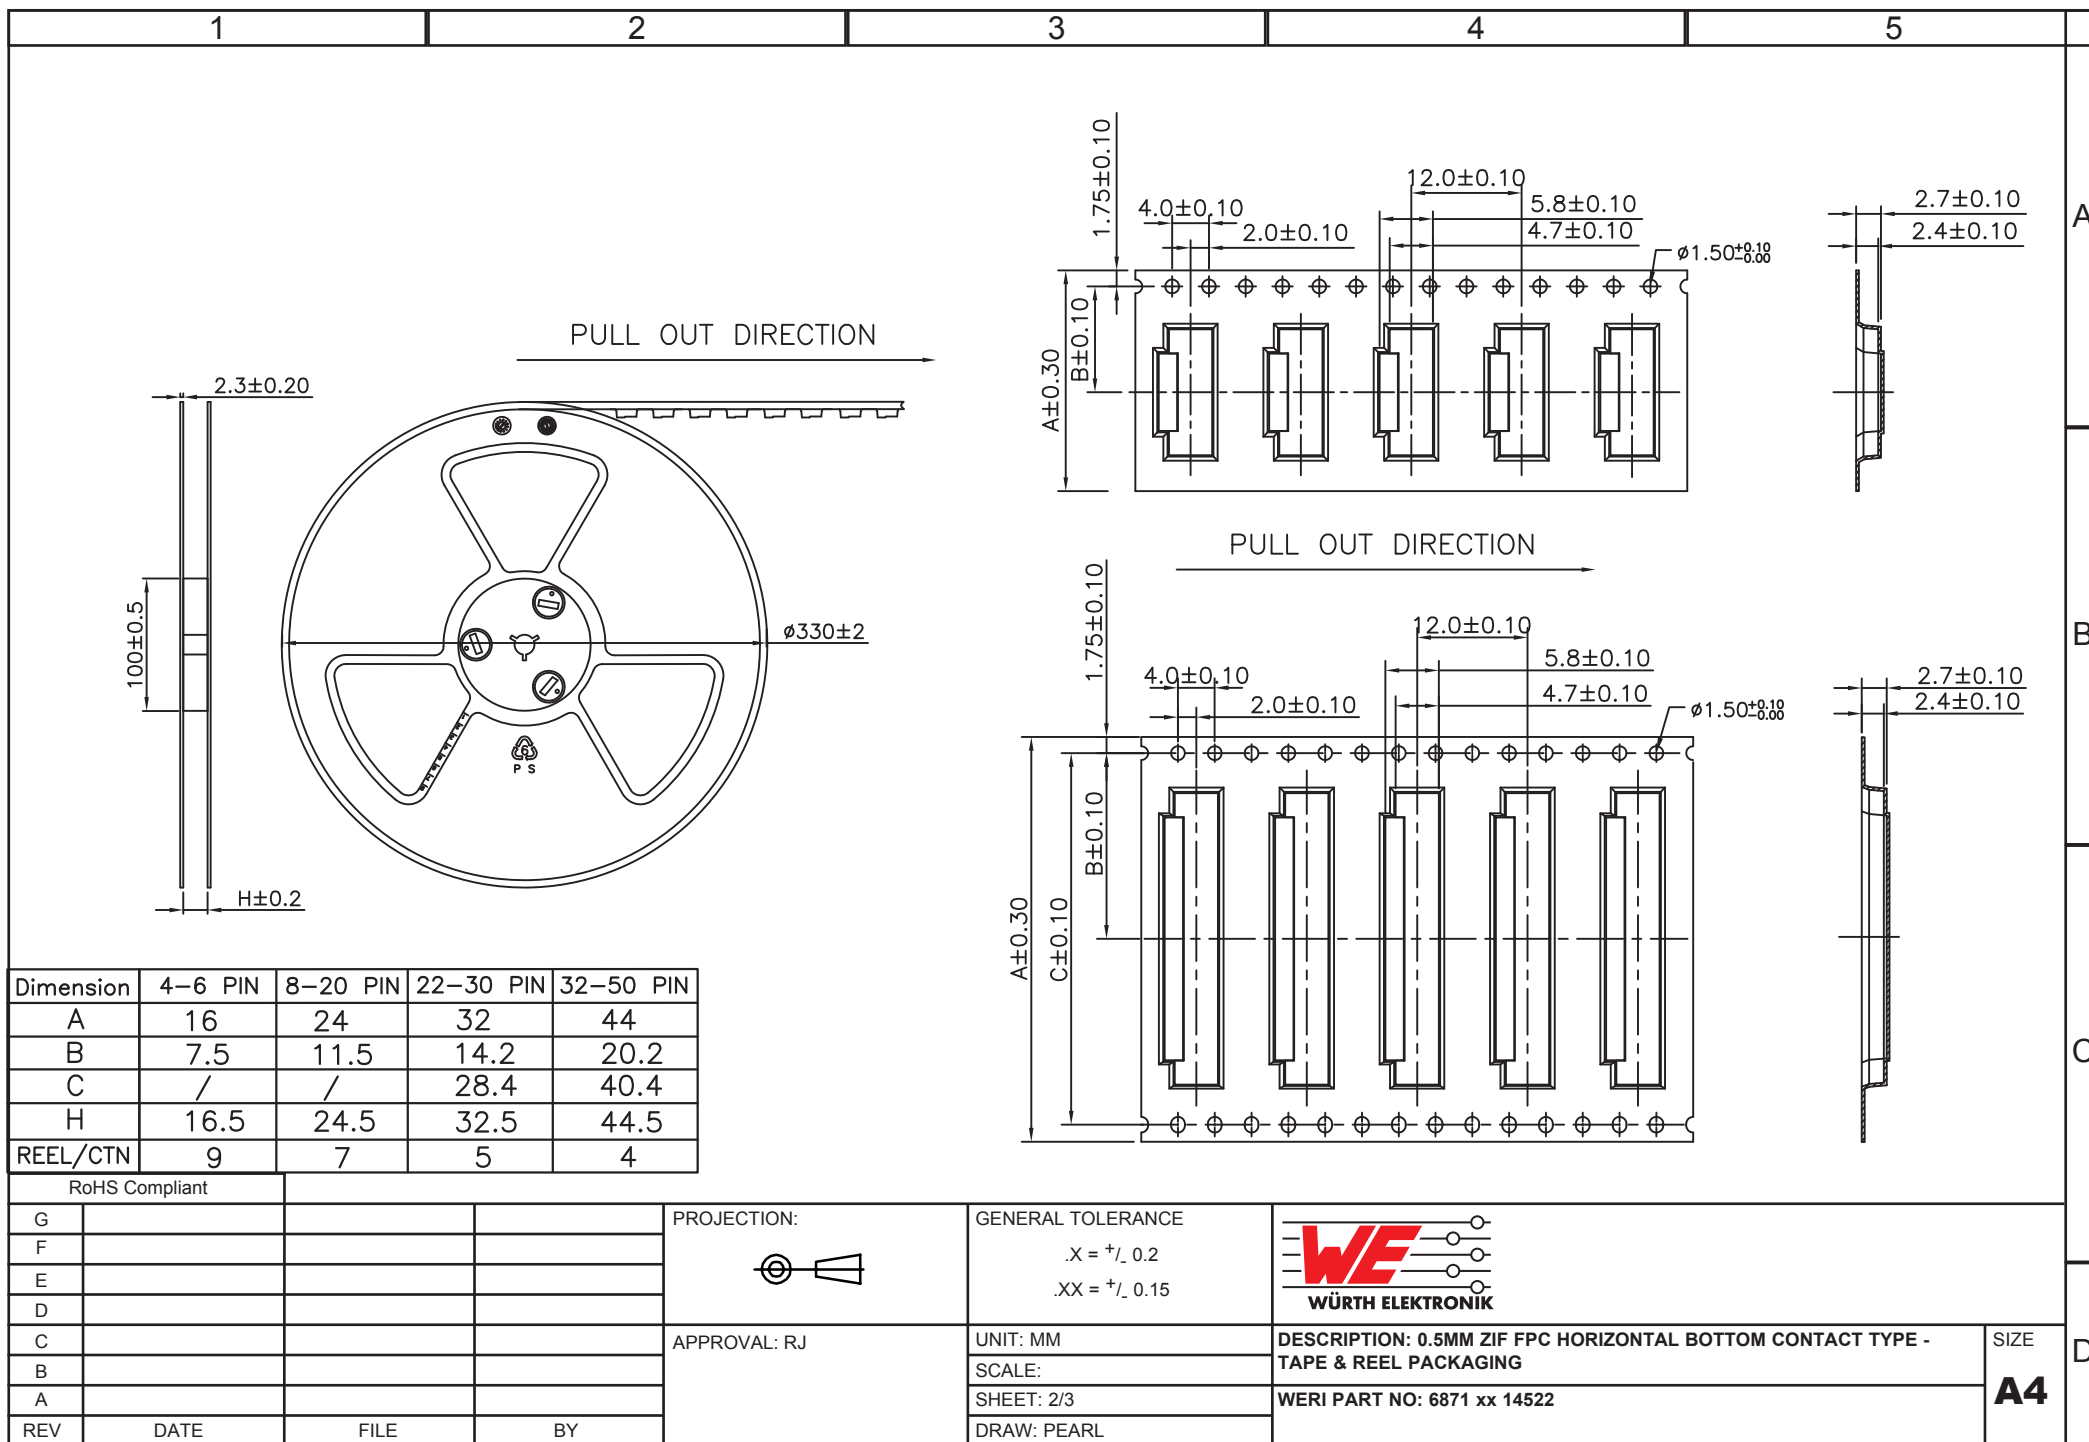

①

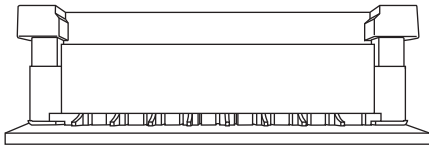


②

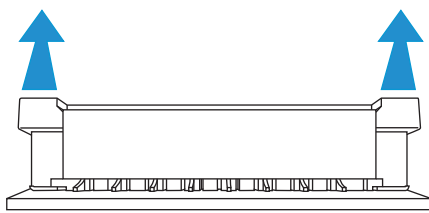


Pull the actuator upwards in the open position

Ⓐ

①



②




Insert the FFC cable vertically until the conductor almost disappears

Ⓑ




Press actuator in the middle to make there is no gap and the actuator is locked


①

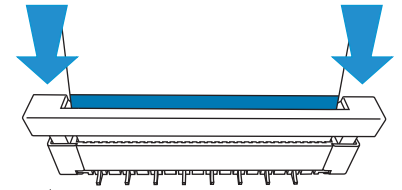



②

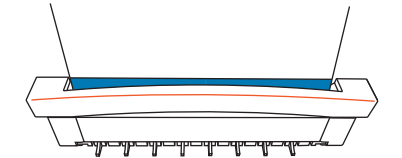


Press both ends of the actuator

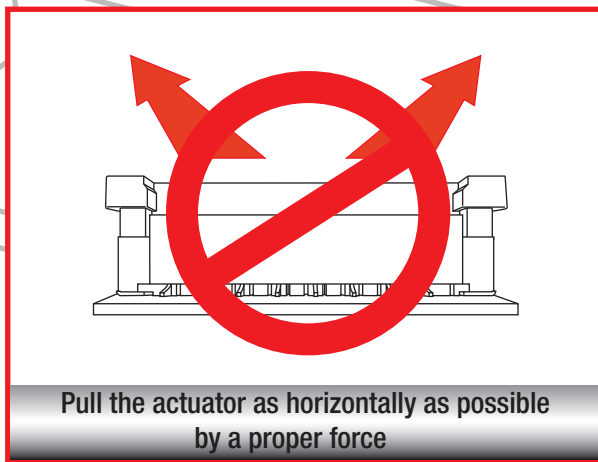

A

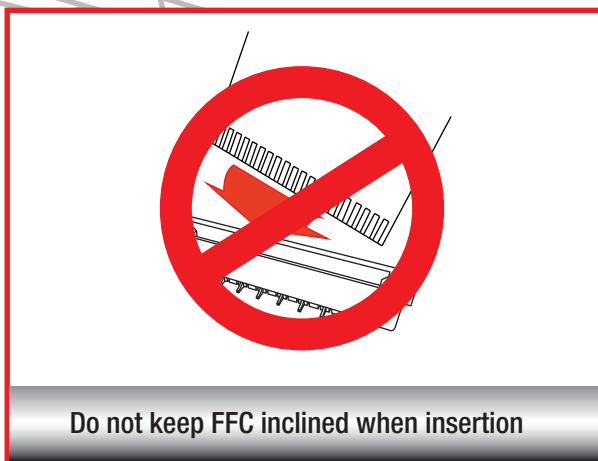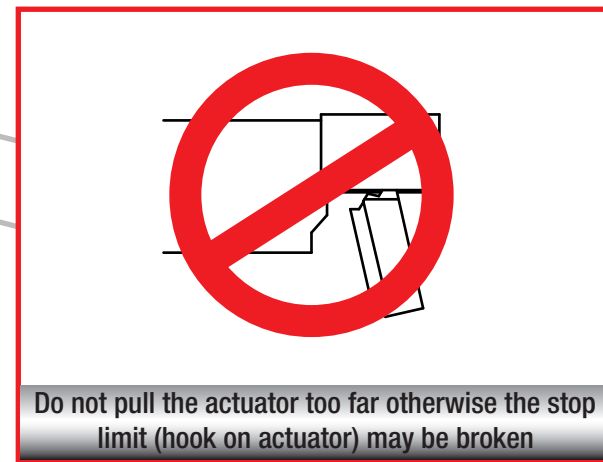

B

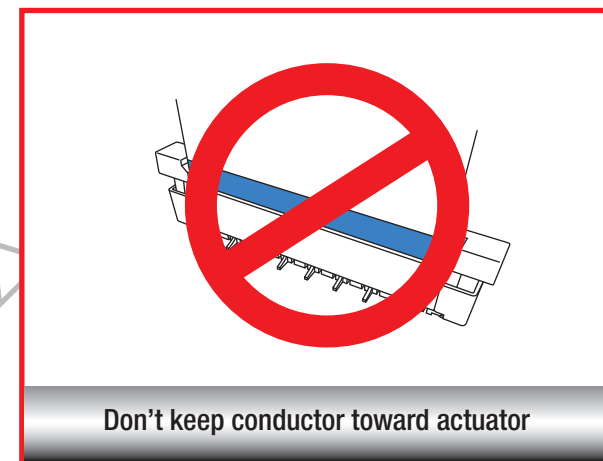

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com