

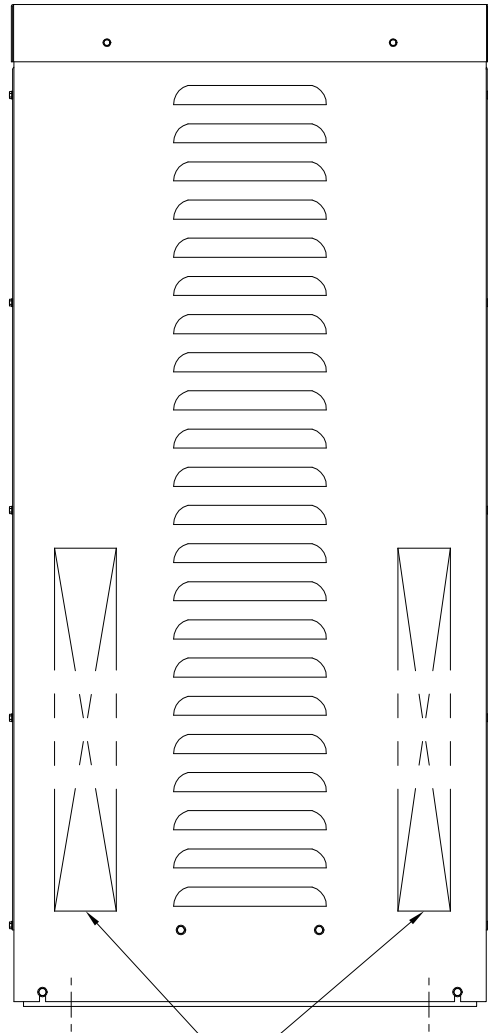
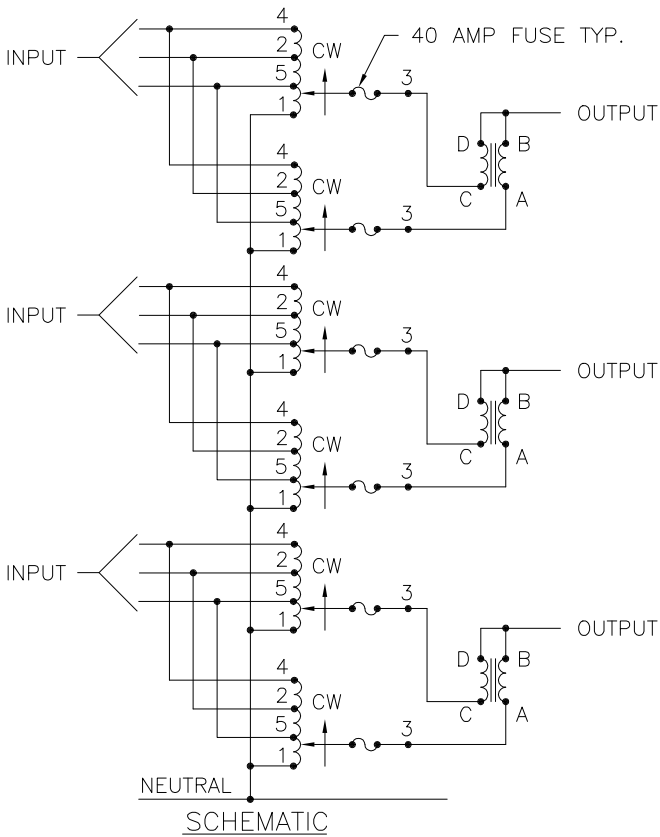
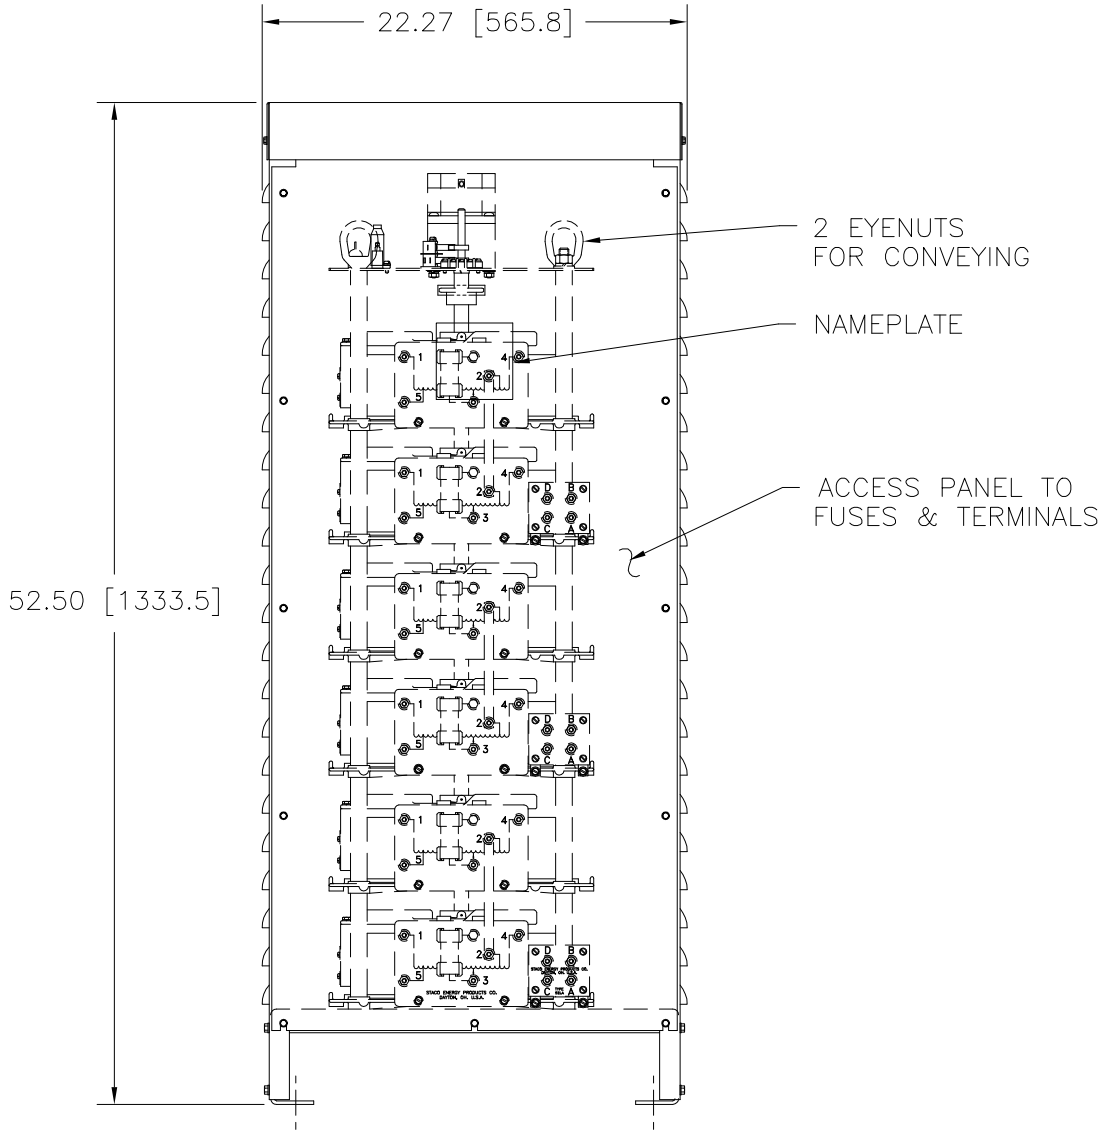


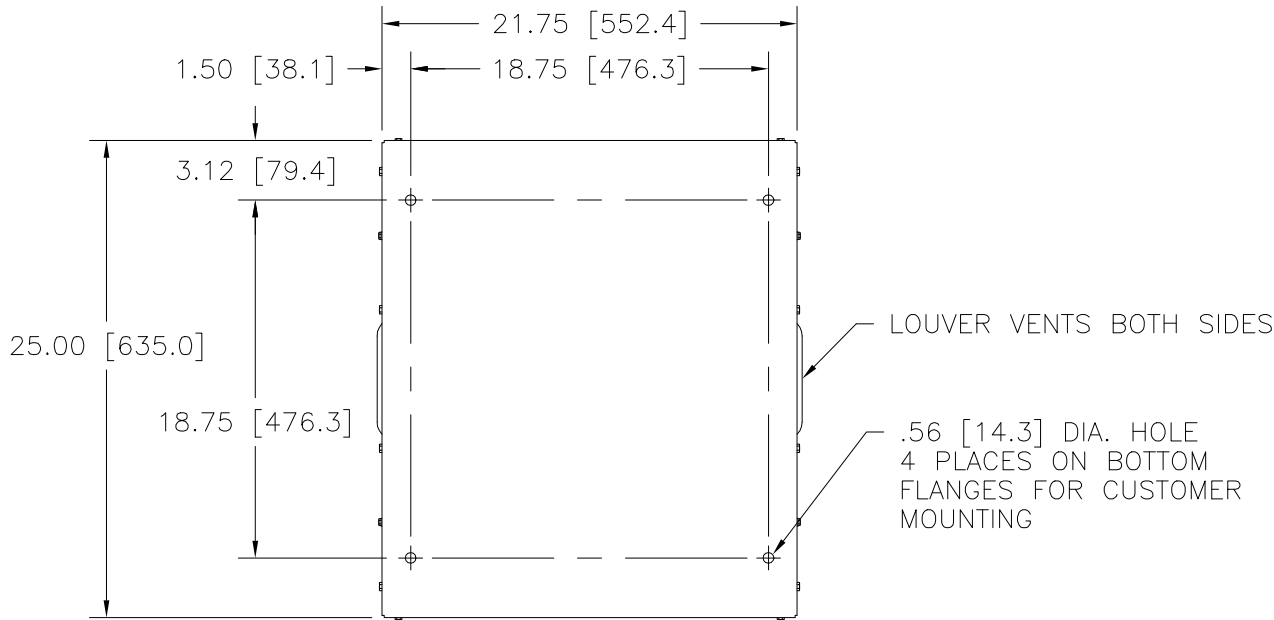

RECOMMENDED AREAS
FOR CONDUIT ENTRY

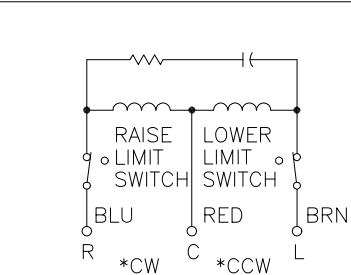

MOTOR CIRCUIT
120V, 50/60 HZ
* ROTATION AS VIEWED
FROM TOP END
MOTOR SPEEDS: 15, 30, 60 SEC.

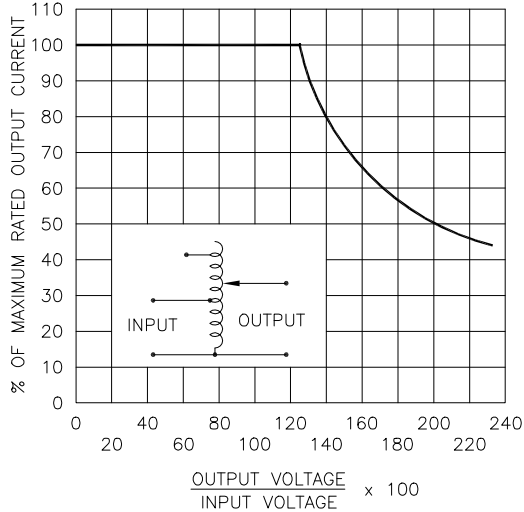


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY
DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER
UNIT OPERATED AT LOWER INPUT VOLTAGE.

* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE, FIGURE A.

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, FIGURE A.

V.D. = VOLTAGE DOUBLER.

SPEED (SECONDS)	MODEL NUMBER
15	15M6020E-6Y
30	30M6020E-6Y
60	60M6020E-6Y

SPECIFICATIONS									
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT	
				MAX. AMPS	MAX. KVA				
THREE PHASE WYE	480	50/60	0-480	70	58.1	CW	4-4-4	B-B-B	
		60	0-560	70	67.8	CW	2-2-2	B-B-B	
		240	60	0-560	70*30 V.D.	29.1 ++	CW	5-5-5	B-B-B
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX .0000 .12 .0000 .03 1° DRAFT 1-1/2° XXX .005 MATERIAL UNITS IN [mm] TITLE: SPECIFICATION CONTROL DRAWING MOTORIZED VARIABLE TRANSFORMER 15 30 & 60M6020E-6Y DRAWN BY S.A. SMITH CHECKER ENGINEER DATE 11/22/94 DATE DATE FIRST USED ON M6020E-6Y WEIGHT APPROX. SCALE .2=1 DO NOT SCALE DWG. CAGE CODE 83008 SHEET 1 OF 1 DWG. SIZE D DWG. NO. 032-8380 STACO ENERGY PRODUCTS CO. A Components Corporation of Ametec Company 305 Glendale Boulevard Dayton, Ohio 45403 USA									
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.									

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com