

CLASS 3 TRANSFORMER

FS36-1000-C2

Description:

The FS36-1000-C2 is a series/parallel primary and dual secondary, split bobbin design which operates with either a parallel input of 115V or a series input of 230V. The secondaries are 18V @ 1A each. They can be used independently (up to 300V difference between them) or in series for double the voltage or in parallel for double the current. The split bobbin design eliminates the need for costly electrostatic shielding.

Electrical Specifications (@25C)

- 1. Maximum Power: 36.0VA
- Primary: Series: 230V; Parallel: 115V
 Secondaries: 18.0V @ 1.0A each
- 4. Voltage Regulation: 25% TYP @ full load to no load
- 5. Temperature Rise: 25C TYP
- 6. Hipot tested 100% at 4200 VRMS pri to sec
- 7. Hipot tested 100% at 2160 VRMS sec to sec
- 8. Recommended fuse (fuse on primary): For 115V Cooper/Bussman, Type MDL, rated 500mA, 250V. For 230V Littlefuse, Type 313, rated 250mA, 250V

Construction:

Three flange bobbin construction with primaries and secondaries wound side by side for low capacitive coupling. UL Class F Insulation System (155°C).

Agency File:

UL: File E65390, UL 5085-1 & 3 (1585), Class 3 Transformer cUL: File E65390, UL 5085-1 & 3 (1585) For Canadian Use (CSA 22.2, No.66.3-06) TUV Certificate No.: R72120839, EN61558, Safety Isolating xfmr, general use








Dimensions: Units in inches								hes.
Н	W	L	А	В	С	D	Е	F
1 562	2 187	2 625	0.400	0.400	1 850	0.041	0.020	0.234

Weight: 1.10 lbs

Schematic:




RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

Note: Order and shipping documentation may have a "-B" suffix; this indicates Bulk packaging but does not show on the actual part number marked on the transformer.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.



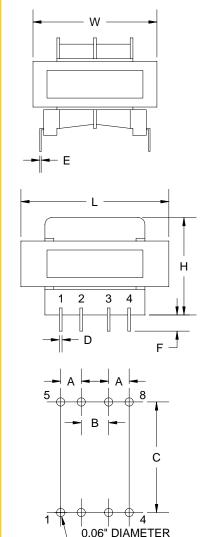

www.TriadMagnetics.com Phone: (951) 277-0757 Fax: (951) 277-2757

460 Harley Knox Blvd. Perris, CA 92571

Publish Date: December 4, 2013

HOLE

Board Layout

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com