



REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
0		RELEASED	06/09/04
			CC

H5906XXX	"L" (length)
076	3"
152	6"
205	8"
229/230	9"
305	12"
457/460	18"
610	24"

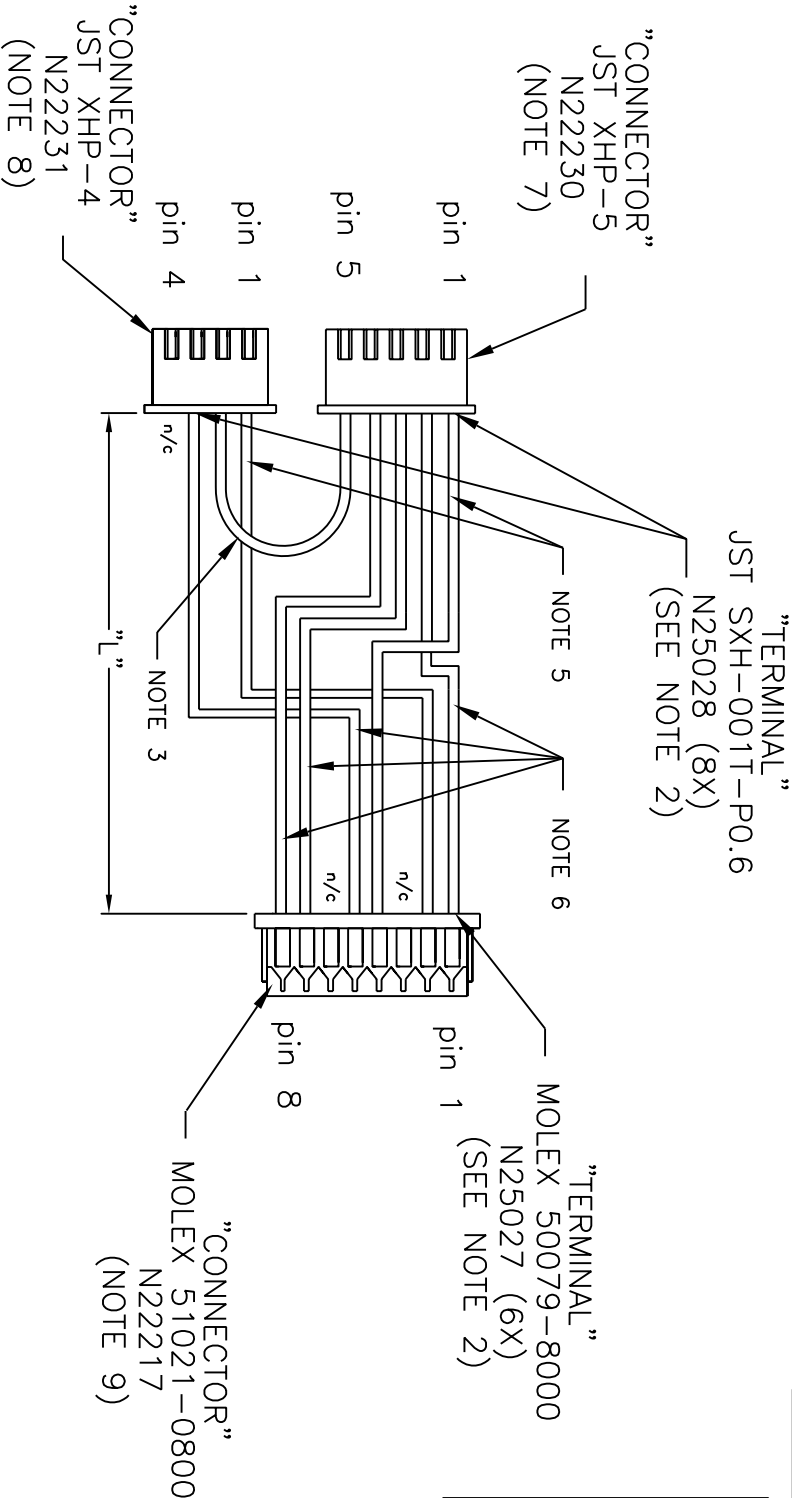


NOTE:

1. WIRES TO BE #26 AWG MIL STD W16878 TYPE B (BELDEN #8504 OR EQUIVELANT) IN COLORS AND LENGTHS LISTED.
2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, SEE ATTACHED DRAWINGS FOR ACCEPTABILITY.
3. WIRE LENGTH IS 152mm (6.0in) WHITE N29203 (STRIP LENGTH OF WIRE ON BOTH ENDS IS 2.5 ± .3mm).
4. USE CABLE TIE N22211 FOR EACH HARNESS. ATTACH TIE AND CLIP EXCESS FLUSH LEAVING NO SHARP EDGE..
5. WIRES ARE BLACK (N29202).
6. WIRES ARE WHITE (N29203).
7. CONNECTOR N22230 IS POPULATED IN POSITIONS 1,2,3,4 AND 5 (STRIP LENGTH OF WIRE IS 2.5 ± .3mm).
8. CONNECTOR N22231 IS POPULATED IN POSITIONS 1,2 AND 3 (STRIP LENGTH OF WIRE IS 2.5 ± .3mm).
9. CONNECTOR N22217 IS POPULATED IN POSITIONS 1,2,4,5,7 AND 8 (STRIP LENGTH OF WIRE IS 1.65 ± .25mm).

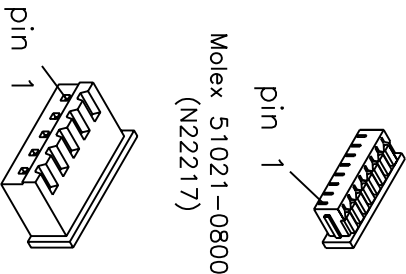

JST XHP-5
(N22230)



TOLERANCES			
FRACTION	± 1/8	USED ON	DMW PRODUCTS
2 PL. DEC.	± .01	APPROVALS	DATE
3 PL. DEC.	± .005	DRAWN	06/09/04
MATERIAL		CHECKED	06/09/04
FINISH		APPROVED	06/09/04
DO NOT SCALE		SCALE	1 OF 1

ENDICOTT RESEARCH GROUP, INC.
2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187

WIRING HARNESS
H5906

DRAWING NUMBER H5906
SCALE 1 OF 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com