

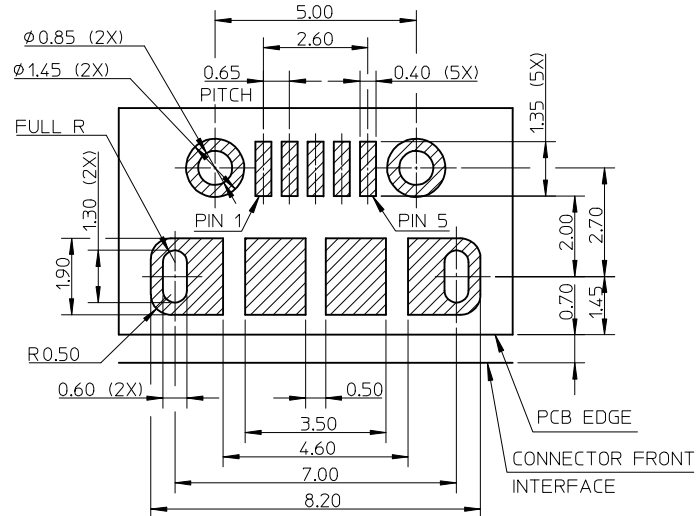
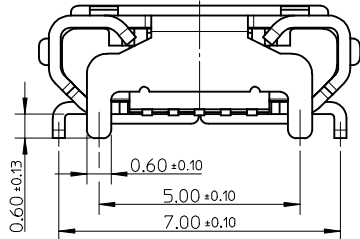

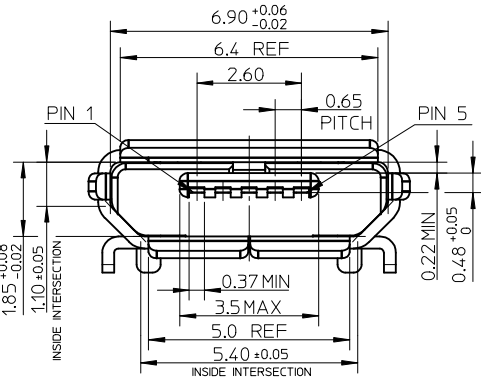
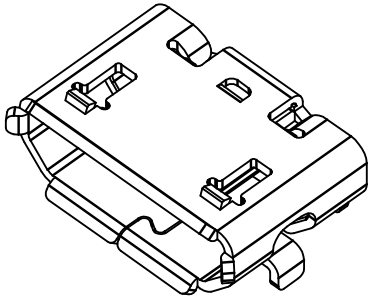


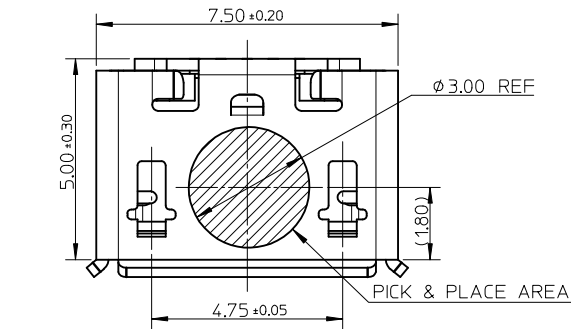

RECOMMENDED P.C.B. PATTERN LAYOUT
GENERAL TOLERANCE: ±0.05

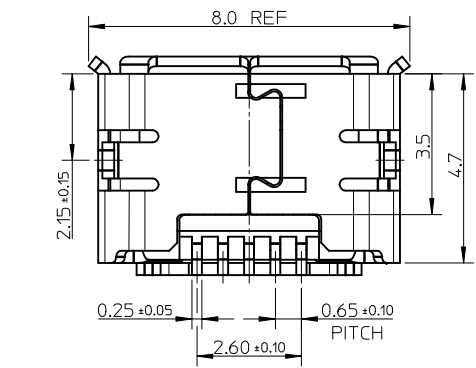

NOTES:

1. MATERIAL:
HOUSING: LCP, BLACK, UL94V-0;
TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
2. PLATING:
TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75MICRON Pd/Ni.
SOLDER TAIL AREA: GOLD FLASH.
UNDER PLATING: NICKEL 2.0 MICRON MINIMUM.
SHELL: MATTE TIN 2.0 MICRON
UNDER PLATING: NICKEL 1.27 MICRON MINIMUM.
3. TAIL & NAIL COPLANARITY 0.08mm MAXIMUM.
4. PRODUCT SPECIFICATION: PS-105017-001.
5. PACKAGING SPECIFICATION: PK-105017-001.
6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC.

REVISED	EC NO: SH2013-0168		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
							MM ONLY		1:1	METRIC				
				 =0	mm	INCH	DRAWN BY	DATE	TITLE MICRO USB BOTTOM MOUNT RECEPTACLE, B TYPE					
						XJSONG	2008/01/23							
				 =0	4 PLACES	± ---	± ---	CHECKED BY	DATE	molex				
					3 PLACES	± ---	± ---	JTIAN	2008/01/23					
				 =0	2 PLACES	± 0.25	± ---	APPROVED BY	DATE					
					1 PLACE	± 0.25	± ---	HWANG	2008/01/23					
					0 PLACE	± ---	± ---	MATERIAL NO.		DOCUMENT NO.	SHEET NO.			
					ANGULAR ± 3 °		105017-0001		SD-105017-001		1 OF 2			
REV				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

NOTES:

1. MATERIAL:

HOUSING: LCP, BLACK, UL94V-0;
TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.

2. PLATING:







TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75MICRON Pd/Ni.
SOLDER TAIL AREA: GOLD FLASH.
UNDER PLATING: NICKEL 2.0 MICRON MINIMUM.
SHELL: MATTE TIN 3.8 MICRON
UNDER PLATING: NICKEL 1.27 MICRON MINIMUM.

3. TAIL & NAIL COPLANARITY 0.08mm MAXIMUM.

4. PRODUCT SPECIFICATION: PS-105017-001.

5. PACKAGING SPECIFICATION: PK-105017-001.

6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC.

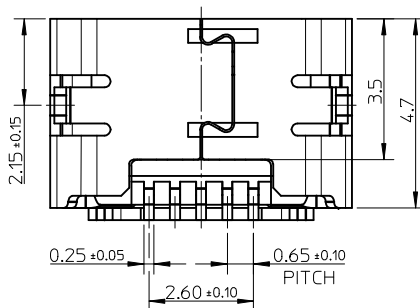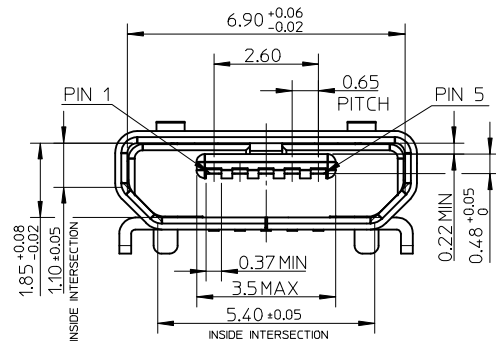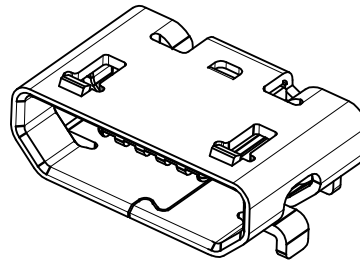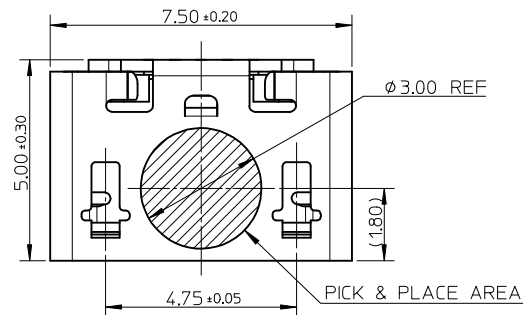

SEE SHEET 1 EC NO: SH2013-0168 TDRWN:XQZHANG CHKD:XQZHANG APPR:AYIN REV	DESCRIPTION REV	QUALITY SYMBOLS F_Δ=0 F_C=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY XJ.SONG	DATE 2008/01/23	TITLE MICRO USB BOTTOM MOUNT RECEPTACLE, B TYPE FLANGELESS TYPE				
						CHECKED BY JTIAN	DATE 2008/01/23					
						APPROVED BY HWWANG	DATE 2008/01/23					
			ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.					SHEET NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		105017-1001		SD-105017-001					2 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

9 8 7 6 5 4 3 2 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com