

1XE314

CATALOG LISTING

PAGE 1 OF 1

REPLACES

PR-21966

RELEASE NO.

M

ISSUE
3

CHECK

REVISIONS

PR-1
21966
JJA
20 DEC 95

CHECK

CHECK

CHECK

CHECK


CHECK

DDM/CAD

DRAWN

JJA

20 DEC 95

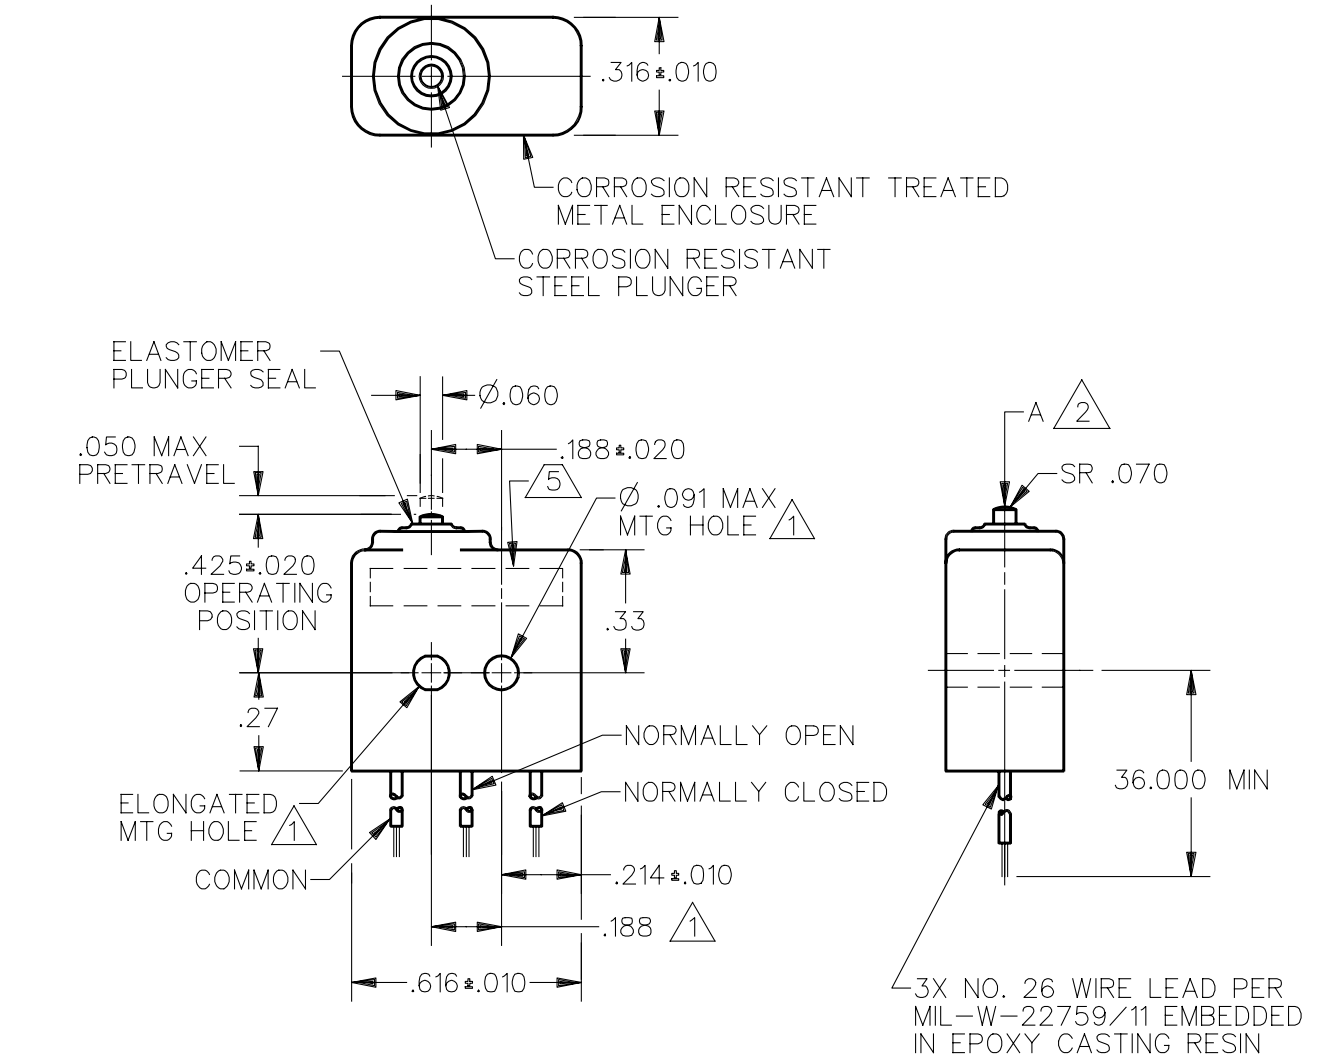


NOTES

- 1 MOUNTING HOLES WILL ACCEPT Ø.087 MAX PINS OR SCREWS ON .188 ± .002 CENTERS
- 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 WEIGHT OF SWITCH ONLY IS .16 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS .55 OZ MAX
- 4 CONTACT MATERIAL: 24K SOLID GOLD
- 5 YELLOW MARKING IS ON BOTH SIDES OF HOUSING TO IDENTIFY THAT THIS UNIT HAS GOLD CONTACTS
- 6 SWITCH CONFORMS TO MS-27994-5 EXCEPT FOR WIRE LEADS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE 2:1	DO NOT SCALE PRINT
OPERATING FORCE — — — — 5-17 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 4 OZ MIN	28 VOLTS DC RATING	ONE PLACE (.0) ± .030	
RELEASE TRAVEL — — — — .004 MIN	INDUCTIVE — — — SEA LEVEL — — — 1/2 AMP	TWO PLACE (.00) ± .015	
DIFFERENTIAL TRAVEL — — — .005 MAX	RESISTIVE — — — SEA LEVEL — — — 1 AMP	THREE PLACE (.000) ± .005	
OVERTRAVEL — — — — .004 MIN	50,000 FT — — — 1 AMP	ANGLES ±	
		WEIGHT 3	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com