


SECTION 2

HEAT DISSIPATORS FOR PLASTIC CASE, CASE-MOUNTED SEMICONDUCTORS


Vertically mounted heat dissipators with board mounting tabs

- Permits higher power levels or lower operating temperatures while occupying a minimum of valuable board space.
- Allows back-to-back dual mounting for thermal matching applications.
- Bendable tabs simplify installation to the circuit board — no mounting hardware or special tools required.
- Dissipators are available with nickel or tin finishes — allows heat sink mounting tabs to be flow-soldered onto board along with other components.
- Each dissipator is optimally designed for maximum effective surface area in a minimum working envelope.

PB1-36 Series

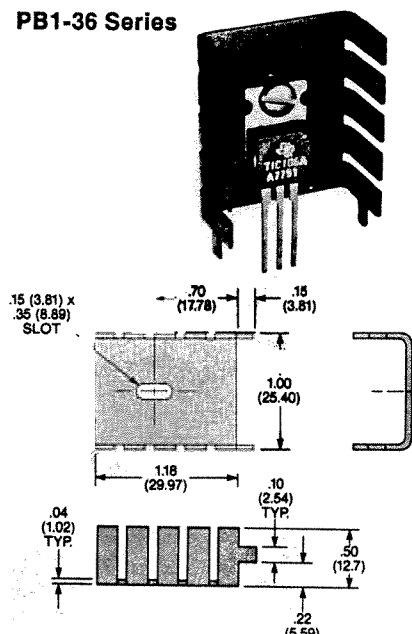

Dimensions are for reference use only. Contact IERC for dimensions with tolerances or standard part drawings.

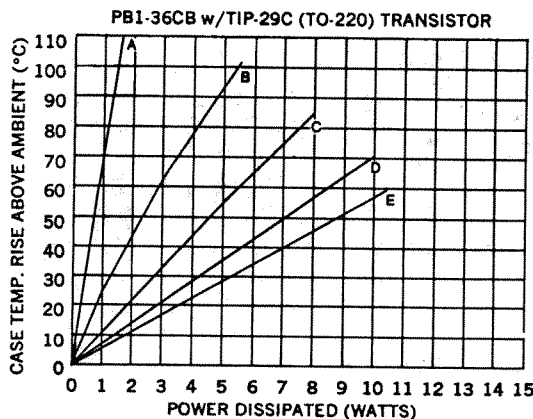

DESCRIPTION OF CURVES
A. N.C. Horiz. Device Only Freestanding.
B. N.C. Horiz. & Vert. With Dissipator.
C. 200 FPM w/Diss.
D. 500 FPM w/Diss.
E. 1000 FPM w/Diss.


- Thermal Resistance Case to Sink is 0.9-1.1 °C/W w/Joint Compound.
- Derate 2.4 °C/watt for unplated part in natural convection only.

Ordering Information


IERC PART NO.					Semiconductor Accommodated	Max. Weight (Grams)
Unplated	Comm'l. Black Anodize	Mil. Black Anodize	Solderable Plating			
			Nickel	Tin		
PB1-36U	PB1-36CB	PB1-36B	PB1-36ND	PB1-36T	TO-126, TO-127, TO-220	3.9

Note: See page iv for other finishes.

PSB2-1 Series

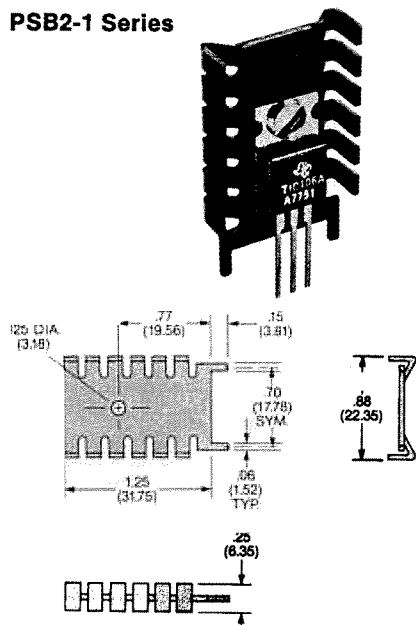

Dimensions are for reference use only. Contact IERC for dimensions with tolerances or standard part drawings.

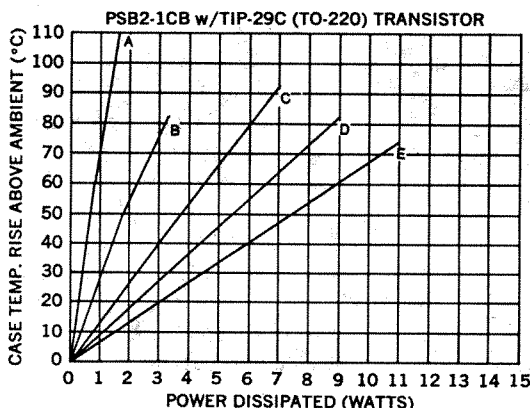

DESCRIPTION OF CURVES
A. N.C. Horiz. Device Only Freestanding.
B. N.C. Horiz. & Vert. With Dissipator.
C. 200 FPM w/Diss.
D. 500 FPM w/Diss.
E. 1000 FPM w/Diss.

- Thermal Resistance Case to Sink is 0.9-1.1 °C/W w/Joint Compound.
- Derate 3.5 °C/watt for unplated part in natural convection only.

Ordering Information

IERC PART NO.					Semiconductor Accommodated	Max. Weight (Grams)
Unplated	Comm'l. Black Anodize	Mil. Black Anodize	Solderable Plating			
			Nickel	Tin		
PSB2-1U	PSB2-1CB	PSB2-1B	PSB2-1ND	PSB2-1T	TO-126, TO-127, TO-220	2.4

Note: See page iv for other finishes.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com