


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

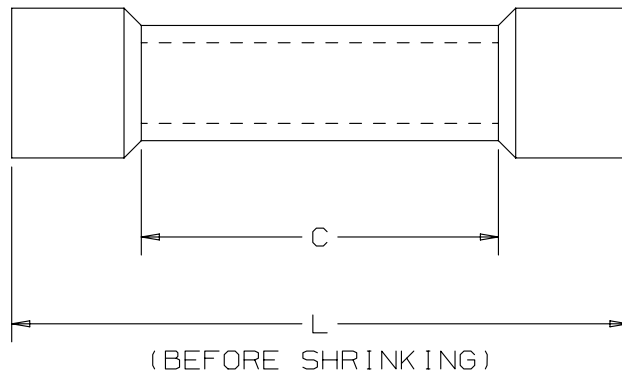

NOTES :

- UL LISTED AND CSA CERTIFIED AFTER HEAT SHRINKING FOR:
 - 600 V MAX. VOLTAGE RATING
 - TEMPERATURE RATING OF INSULATION: 125°C (257°F)
 - STRANDED COPPER WIRE ONLY (SEE CHART FOR WIRE RANGE)
- MATERIAL :
 - CONNECTOR - TIN PLATED COPPER TUBE, BRAZED SEAM BSH10 ONLY
 - INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
- MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
- ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
- INSTALLATION TOOL: CT-310
- WIRE STRIP LENGTH: $5/16^{+1/16}_{-0}$
- SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

PANDUIT PART NUMBER	WIRE RANGE (AWG)	DIMENSIONS		MAX WIRE INSULATION DIA	INSULATION COLOR
		C	L		
BSH18	22-18	.58 (14,7)	1.45 (36,8)	.170 (4,32)	RED
BSH14	16-14	.58 (14,7)	1.45 (36,8)	.190 (4,83)	BLUE
BSH10	12-10	.74 (18,8)	1.64 (41,7)	.240 (6,10)	YELLOW



LISTED
1200



CERTIFIED
73971

						TITLE						
						HEAT SHRINK INSULATED BUTT SPLICES						
						CUSTOMER DRAWING						
						ITEM REVISION NAME		N41454BA/04				
						DATASET FILE NAME		N41454BA_DC/04A				
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5°						
						THIRD ANGLE PROJECTION						
						MATERIAL:						
						SEE NOTES						
						DRAWING NUMBER:						
						A41454						
04	04-25-13	JBN	RTFI	RTFI	UPDATED DRAWING BORDER & TITLE BLOCK	A41454						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							DRL	-	RLS	NONE		A

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com