


P/N 11047-24-1-0500-0XX-1-TS

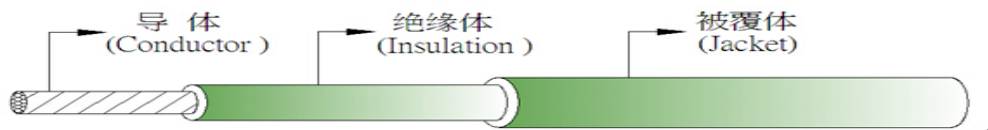

UL11047 MPPE Wire 105°C 600V (24AWG)

CONSTRUCTION:	Tinned Strands, copper conductor, 7/0.160mm strands. Overall Diameter=1.46+/-0.10mm Insulation Thickness: 0.20mm
CERTIFICATION & APPROVALS:	DUAL-RATED AWM: Can be used in USA and Canada UL Subject 758 UL FILE NO:E108485 CSA Standard CSA FILE NO:LL84687 Printed Markings: AWG 11047 () AWG 105°C 600V E108485-S REI HSING VW-1 ROHS REACH Passes UL VW-1 & CSA FT1 Vertical Flame Test.
PHYSICAL & ELECTRICAL PROPERTIES:	Rated Temperature: 105°C ~ -10°C Rated Voltage: 600V Insulation Potential Strength: 2000 VAC/min. Flexibility: MPPE Insulation Maximum Conductor Resistance: 88.60 ohm/km Resistant to: Oil, hot & cold, lighter, flexing.
APPLICATIONS:	MPPE Wire, Halogen Free and pass VW-1 flame test, insulation lighter, properties better, no irradiation. Suitable for internal wires of electronic & electrical equipment.
PACKAGING:	500ft per reel.
ENVIRONMENTAL APPROVALS:	Conforms to all current RoHS directives as laid out in EU Directive 2011/65/EC. Current SGS reports for this wire are available upon request.

P/N's & COLORS

11047-24-1-0500-001-1-TS BLACK	11047-24-1-0500-002-1-TS WHITE	11047-24-1-0500-003-1-TS YELLOW	11047-24-1-0500-004-1-TS RED	11047-24-1-0500-005-1-TS BLUE
11047-24-1-0500-006-1-TS BROWN	11047-24-1-0500-007-1-TS GREEN	11047-24-1-0500-008-1-TS ORANGE	11047-24-1-0500-010-1-TS VIOLET	11047-24-1-0500-011-1-TS GREEN + YELLOW

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com