

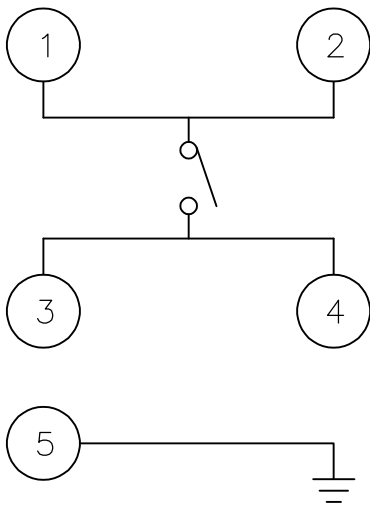
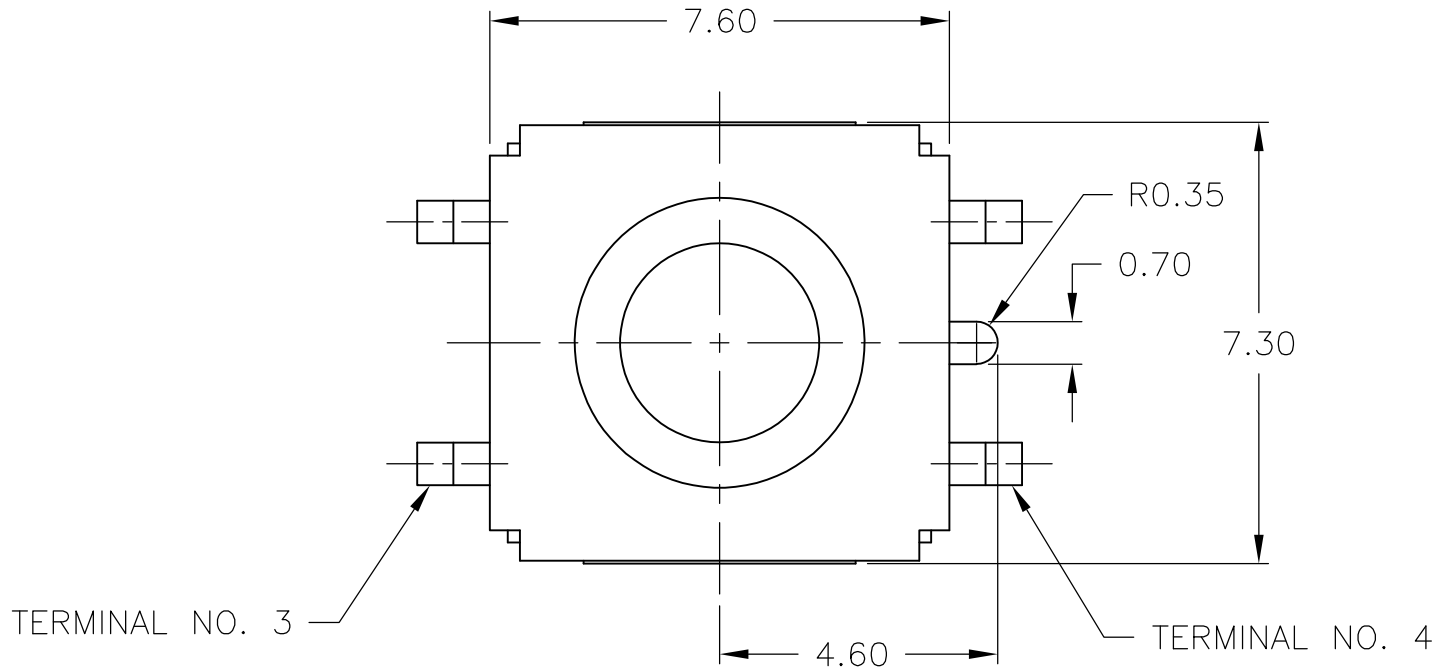
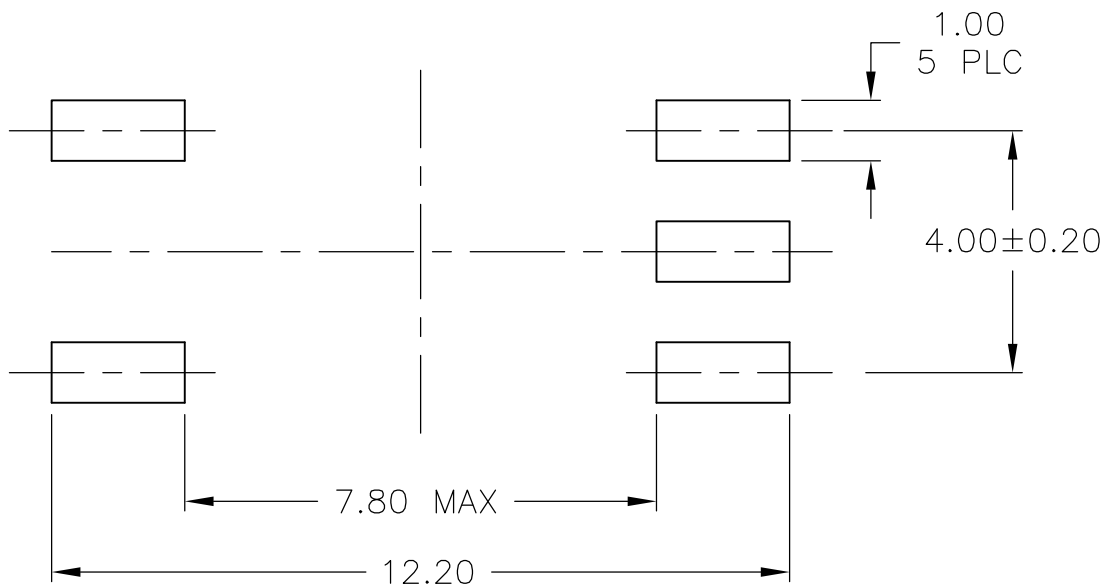


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		E	ECO-07-00908	02JUL07	MB	MS
			E1	REVISED PER ECO-09-023929	24OCT09	KK	AEG

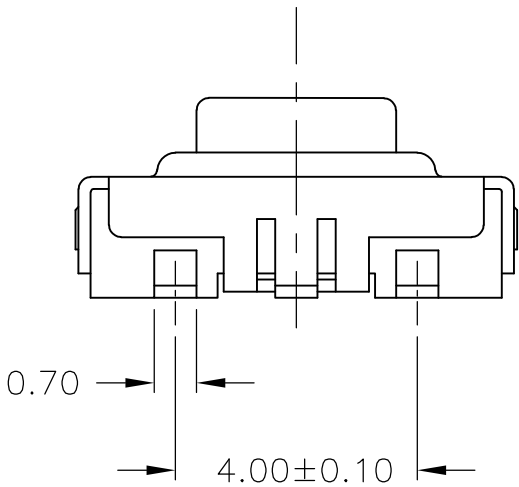

CIRCUIT DIAGRAM

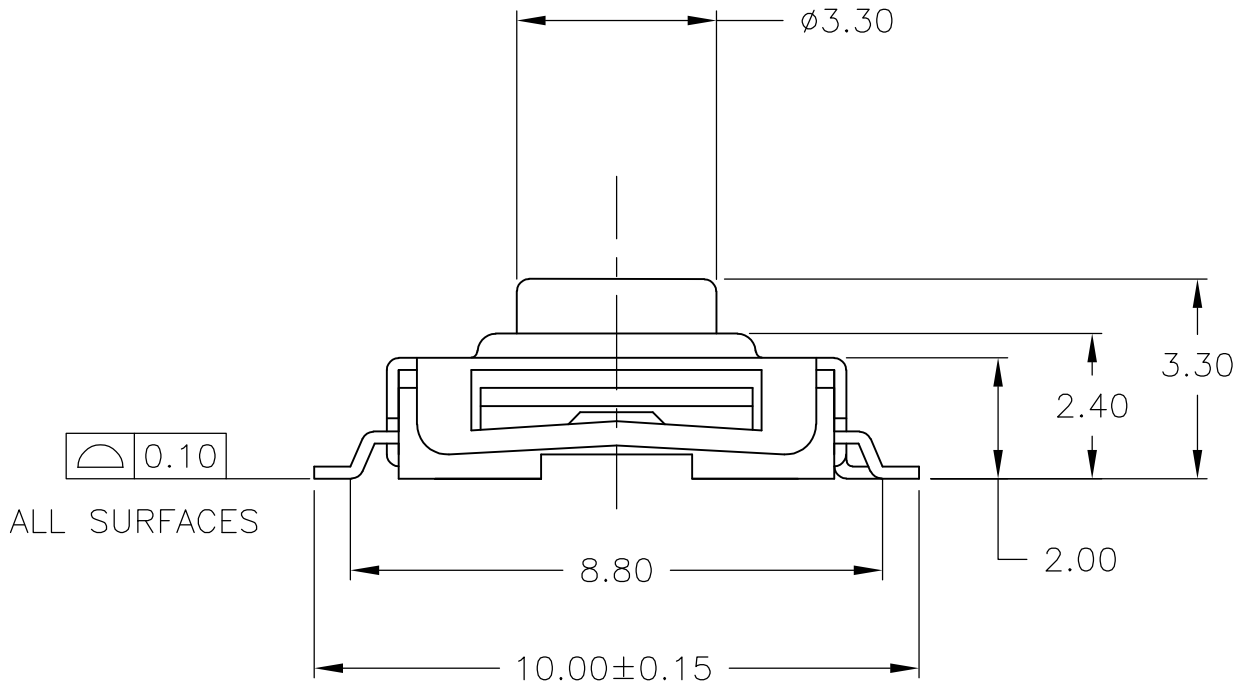

P.C.B MOUNTING SOLDER LAND DIMENSION

SPECIFICATIONS

MATERIALS

CASE: THERMOPLASTIC, UL94V-0, BLACK
ACTUATOR: THERMOPLASTIC, UL94V-0, BLACK
COVER: NICKEL SILVER
SEAL: SILICON RUBBER, BLACK
CONTACT: STAINLESS STEEL, PLATING-SILVER
TERMINAL: BRASS, PLATING-SILVER/NICKEL

ELECTRICAL

MAX CONTACT RATING: 50MILLIAMPS@24V DC
MIN CONTACT RATING: 10MICROAMPS@1V DC
INITIAL CONTACT RESISTANCE: 100 MILLIOHMS MAX, PER EIA RS-448, METHOD 1
INSULATION RESITANCE: 100 MEGOHMS MIN @ 100VDC PER EIA RS-186-13E
DIELECTRIC STRENGTH: 250VAC PER EIA RS-186-4E
CONTACT BOUNCE: 10 MILLISECOND MAX PER EIA-448-18, METHOD 15

MECHANICAL

ACTUATOR OPERATING FORCE: SEE TABLE
ACTUATOR TRAVEL: 0.35±0.2mm

DURABILITY

UP TO 1,000,000 CYCLES, AT RATED LOAD PER EIA-RS-448, METHOD 8
FINAL CONTACT RESISTANCE: 200 MILLIOHMS MAX
CONTACT BOUNCE: 20 MILLISECONDS MAX
ACTUATOR FORCE: WITHIN ±30% OF INITIAL VALUE

ENVIRONMENTAL


OPERATING TEMPERATURE RANGE: -35°C to +85°C, 45% - 85% RH
STORAGE TEMPERATURE RANGE: -35°C to +85°C
HUMIDITY: 96 HOURS PER EIA-186-1E
INSULATION RESISTANCE: 10 MEGOHMS MIN
DIELECTRIC STRENGTH: 250VAC
CONTACT RESISTANCE: 100 MILLIOHMS MAX
DRY HEAT TEST: 85°C FOR 96 HOURS PER IEC 60068-2-2, TEST B,
NO CHANGE IN INITIAL ELECTRICAL AND MECHANICAL CHARACTERISTICS
COLD TEST: -25°C FOR 96 HOURS PER IEC 60068-2-1, TEST A;
NO CHANGE IN INITIAL ELECTRICAL AND MECHANICAL CHARACTERISTICS
THERMAL CYCLING: 5 CYCLES, -30°C to +85°C
HUMIDITY-TEMPERATURE CYCLING, EIA 364-31B, METHOD III
CONTACT RESISTANCE 100 MILLIOHMS MAX
RESISTANCE TO SOLDERING HEAT PER 109-201 COND B
SEALING PER IP67

SOLDERABILITY: PER EIA RS-186-9E

NOTE:

- 1 PACKAGE ON TAPE AND REEL PER EIA-481
2. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

3	OBSOLETE	1	TAPE AND REEL	160±50gf	1571296-2
			BULK	160±50gf	1571296-1
			PACKAGING	OPERATING FORCE	TYCO PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 24APR02		 Tyco Electronics Corporation Harrisburg, PA 17105							
		CHK H WYNKOOP 24APR02									
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H WYNKOOP 24APR02		NAME SWITCH ASSEMBLY, TACTILE, 6mm SEALED, SMT					
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 3 PLC ± - 4 PLC ± - ANGLES ± ±		PRODUCT SPEC —							
				APPLICATION SPEC —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL —		FINISH —		WEIGHT —		A2 00779 C=1571296		—			
CUSTOMER DRAWING						SCALE	8:1	SHEET	1 of 1	REV	E1

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct	+86 (21) 6401-6692
Email	amall@ameya360.com
QQ	800077892
Skype	ameyasales1 ameyasales2

➤ Customer Service :

Email	service@ameya360.com
-------	----------------------

➤ Partnership :

Tel	+86 (21) 64016692-8333
Email	mkt@ameya360.com