

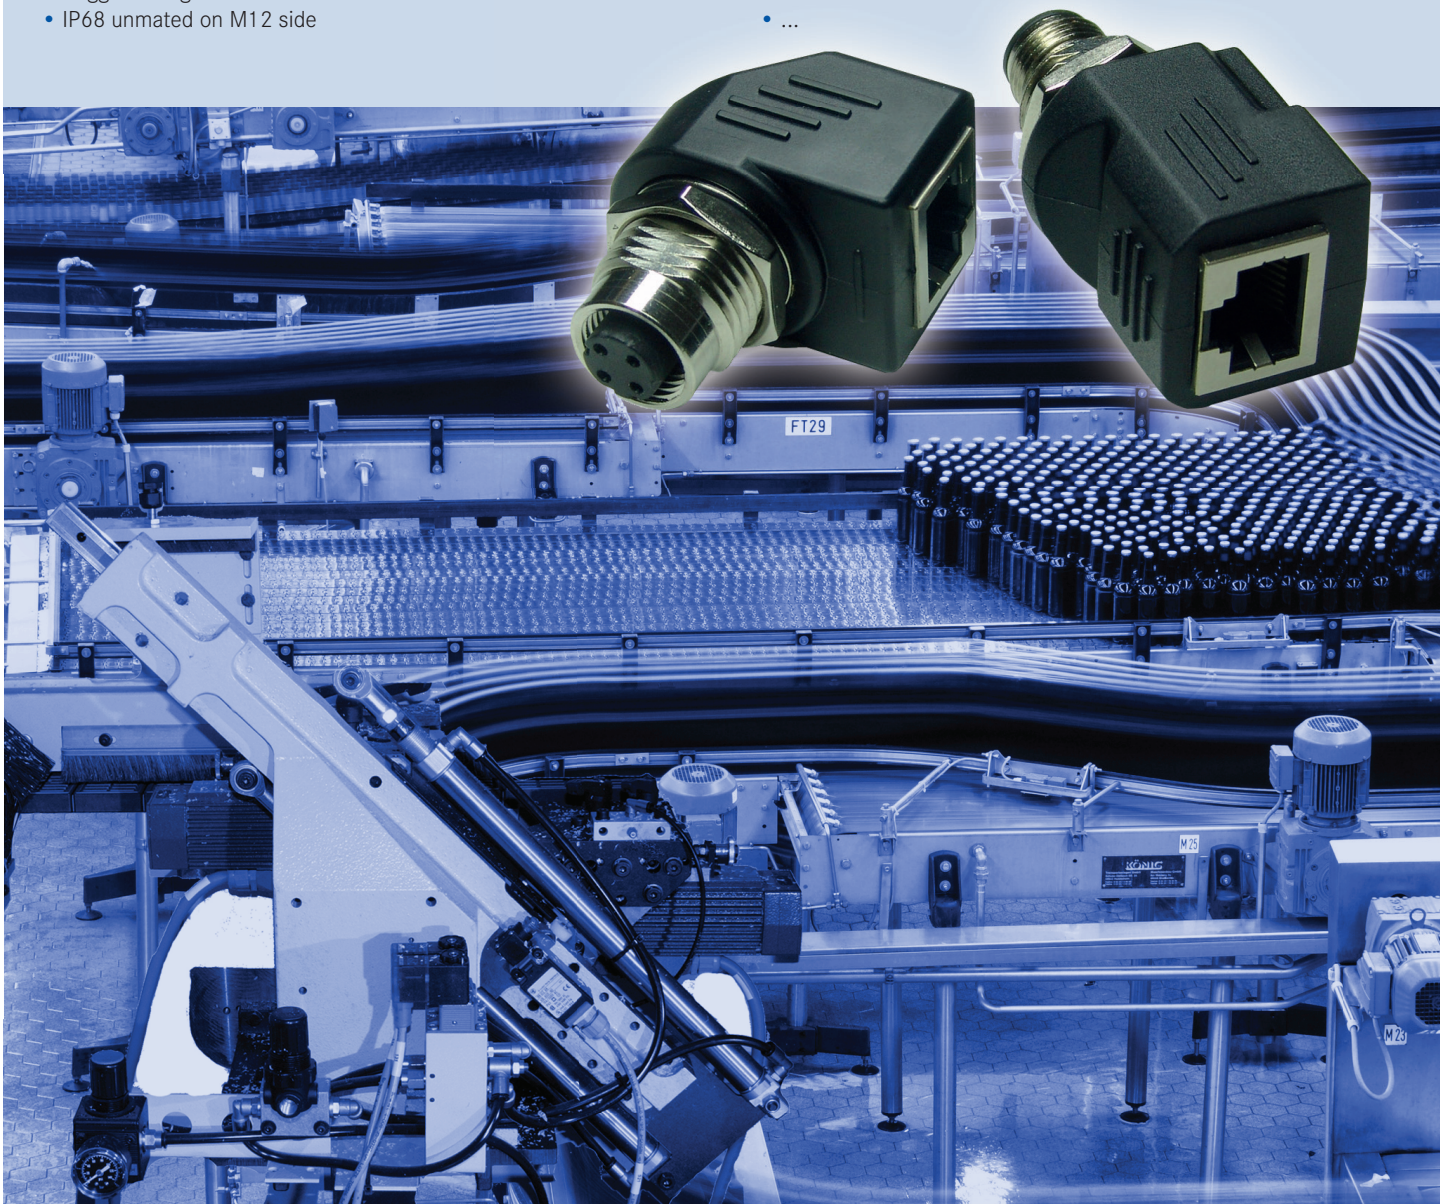
M12 - RJ 45 Adapters

Characteristics:

- Adapter from M12 to RJ45
- ODVA compliant
- Rugged Design
- IP68 unmated on M12 side

Applications:





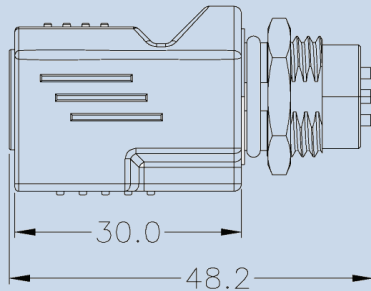
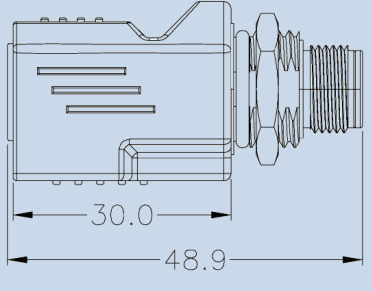

- Industrial Ethernet
- Factory Automation
- Drives
- ...



Technical Data

Parameter	Standard	Value
Connector		M12 to RJ Adapter
Pin (End 1)	IEC 61076 - 2 - 101	4 (M12 D-code)
Pin (End 2)		RJ45
Connector & Contact Gender (End 1)		Male or Female
Connector & Contact Gender (End 2)		Female
Mating Style		Screw Type
Backshell		Front Mount
Waterproof Rating	IEC 60529	M12 = IP68 / Body = IP65
Mating Parts		M12 4 Pole D-code / RJ45 Plug
Materials		
Contact Body (UL)	UL	PA + GF
Contacts		Copper Alloy
Contact Plating		Gold Plating
O-ring (UL)		Viton
Electrical Characteristics		
Current Rating	IEC 61076 - 2 101	M12: 4A
Voltage Rating	IEC 61076 - 2 101	M12 4 Pole: 250V
Withstanding Voltage	IEC 61076 - 2 101	M12 4 Pole: 1400Vrms
Contact Resistance	IEC 61076 - 2 101	<10mΩ
Mechanical Characteristics		
Operating Temperature		0°C to +70°C
Insertion and Withdrawal Force	IEC 61076 - 2 101	M12 Conn.: Insertion: 10N; Withdrawal: 15N
Mating Cycle	IEC 61076 - 2 101	M12 Conn.: 100
Vibration	IEC 61076 - 2 101	10 ~ 500 Hz and 0,35 mm or 50 mm/s²
Part Numbers		
Adapter right-angled, female M12		RJS-12D04FF-RS8001
Adapter right-angled, male M12		RJS-12D04FM-RS8001
Adapter straight, female M12		RJS-12D04FF-LS8001
Adapter straight, male M12		RJS-12D04FM-LS8001

Dimensions

Pin Configurations	M12 Female  Pin Assignments Front View M12 Male  Pin Assignments Front View
Dimensional Drawings	 RJS-12D04FF-RS8001  RJS-12D04FM-RS8001  RJS-12D04FF-LS8001  RJS-12D04FM-LS8001
Recommended Panel Cut-Out	

General Information

We reserve the right to change the design due to improvement in quality, development or production requirements. This data sheet must not be used in any form or manner without our prior approval in writing (Copyright, Law, Fair Trading Law, Civil Code). All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding; particularly the information does not constitute or provide any legal guaranties ("Beschaffenheitsgarantie" or "Haltbarkeitsgarantie")

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com