

SPECIFICATIONS

ELECTRICAL

RESISTANCE RANGE (OHMS)-----1K,2K,5K,10K,20K,50K  
RESISTANCE TOLERANCE-----±15%  
LINEARITY,INDEPENDENT-----±2.0%  
RESOLUTION-----ESSENTIALLY INFINITE  
ELECTRICAL STROKE-----.433±.020  
OUTPUT SMOOTHNESS-----0.1% AGAINST INPUT VOLTAGE  
POWER RATING-----0.2WATT  
INSULATION RESISTANCE-----1000 MEGOHMS @ 500 VDC  
DIELECTRIC STRENGTH-----500 VAC MIN.  
FRICTION-----30 GRAMS

MECHANICAL


MECHANICAL STROKE-----.472  
STOP STRENGTH-----APPROX. 2 POUNDS  
LIFE EXPECTANCY-----20,000,000 STROKES  
WEIGHT APPROX.-----0.2 OZS.  
MARKINGS-----ETI SYSTEMS  
P/N LCP8-10  
RESISTANCE-----  
SPRING RETURN-----RETRACTED, APPROX. 230GRAMS  
FORCE WHEN APPLICABLE-----EXTENDED, APPROX. 57GRAMS

ENVIRONMENTAL


SHOCK-----50G, 11ms  
VIBRATION-----10HZ TO 2000HZ 15G  
OPERATING TEMPERATURE RANGE-----30° C TO +105° C  
TEMPERATURE COEFFICIENT-----±400 PPM /°C

OPTIONS

RESISTANCE TOLERANCE-----±10%  
LINEARITY,PRECISION-----±1%  
SPECIAL MACHINED SHAFT-----



| REV. | BY | DATE     | PART NO. |
|------|----|----------|----------|
| K    | BT | 11-25-98 | LCP8-10  |

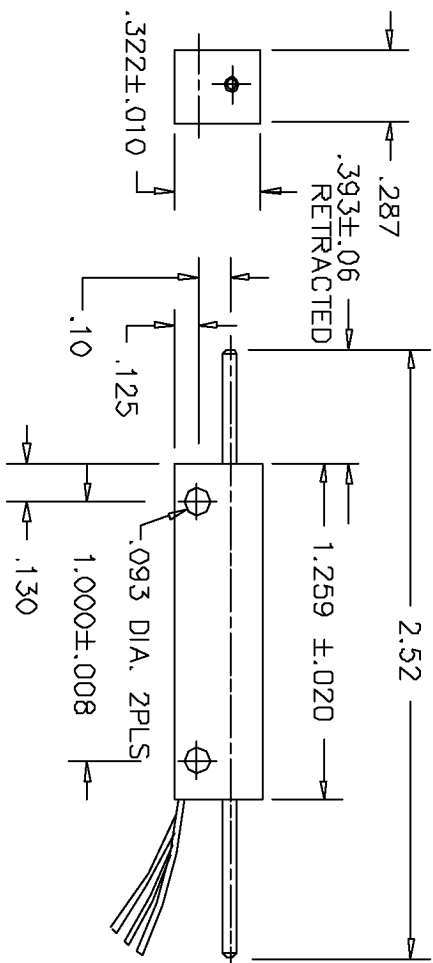


.079 DIA+0/-0.001

MODEL NO'S.

SHAFT STYLES

|          |     |  |                             |
|----------|-----|--|-----------------------------|
| LCP8P-10 | (P) |  | PLAIN                       |
| LCP8T-10 | (T) |  | THREADED<br>2-56 UNC-2A     |
| LCP8C-10 | (C) |  | CHAMFERED                   |
| LCP8S-10 | (S) |  | SPRING RETURN<br>(INTERNAL) |

THIS DOCUMENT CONTAINS PROPRIETARY DATA OF POLARIS INDUSTRIAL ENTERPRISES, INC. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THERE OF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.



CARLSBAD  
SYSTEMS  
CALIFORNIA

TOLERANCES

XX = +/- .010° FRACT. = +/- 1/64°  
XXX = +/- .005° ANGLES = +/- 1/2°

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

|         |        |
|---------|--------|
| SCALE   | NONE   |
| DATE:   | 12--76 |
| BY      |        |
| APPRV'D | BT     |

TITLE

LINEAR MOTION  
POTENTIOMETER

PART NO.

LCP8-10

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email     amall@ameya360.com  
QQ        800077892  
Skype     ameyasales1 ameyasales2

➤ Customer Service :

Email     service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email     mkt@ameya360.com