


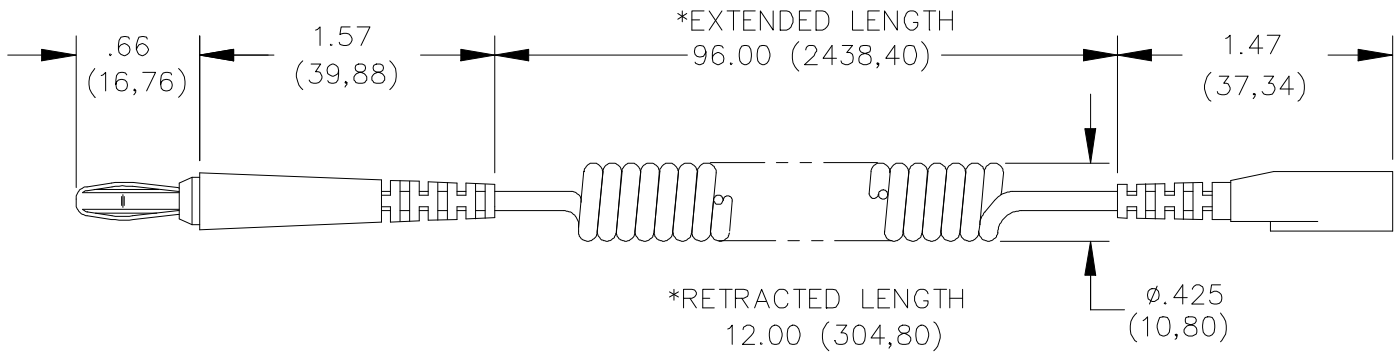

MATERIALS:

Connector: 1st End – Standard Banana Plug

Spring – Beryllium Copper Alloy 172, Cond. HT.

Plug Body – Brass Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches

Insulation: Kraton. Color: Black

Coiled Cord: Coiled tinsel cord, 2 bundles, 7 strands silver, vinyl jacket 2.54 (.100) O.D.

Connector: 2nd End – 3.18 (1/8) Snap Receptacle - Brass

Finish: Nickel plated

Insulation: Kraton. Color; Black

Molded-In Resistor: 1 megohm $\pm$ 10%, ¼ Watt, Carbon Film

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

ORDERING INFORMATION: Model 5534

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com