

Solder Paste No-Clean Sn42/Bi58 in Jar 500g T3 Mesh

Product Highlights

Printing speeds up to 100mm/sec
Long stencil life
Wide process window
Clear residue
Low voiding
Excellent wetting compatibility on most board finishes
Print grade
Compatible with enclosed print heads
RoHS II and REACH compliant

Specifications

Alloy:	Sn42/Bi58
Mesh Size:	T3
Micron (µm) Range:	25-45
Flux Type:	Synthetic No-Clean
Flux Classification:	REL0
Metal Load:	90% Metal by Weight
Melting Point:	138°C (281°F)
Packaging:	Jar 500g
Shelf Life:	Refrigerated >6 months, Unrefrigerated >2 months

Printer Operation

Print Speed: 25-100mm/sec
Squeegee Pressure: 70-250g/cm of blade
Under Stencil Wipe: Once every 10-25 prints, or as necessary

Stencil Life

>8 hours @ 20-50% RH 22-28°C (72-82°F)
>4 hours @ 50-70% RH 22-28°C (72-82°F)

Stencil Cleaning


Automated stencil cleaning systems for both stencil and misprinted boards. Manual cleaning using isopropyl alcohol (IPA).

Storage and Handling

Refrigerate at 3-8°C (37-46°F). Do not freeze. Allow 4 hours for solder paste to reach an operating temperature of 20-25°C (68-77°F) before use.

Recommended Profile

Reflow profile for Sn42/Bi58 solder assembly, designed as a starting point for process optimization.

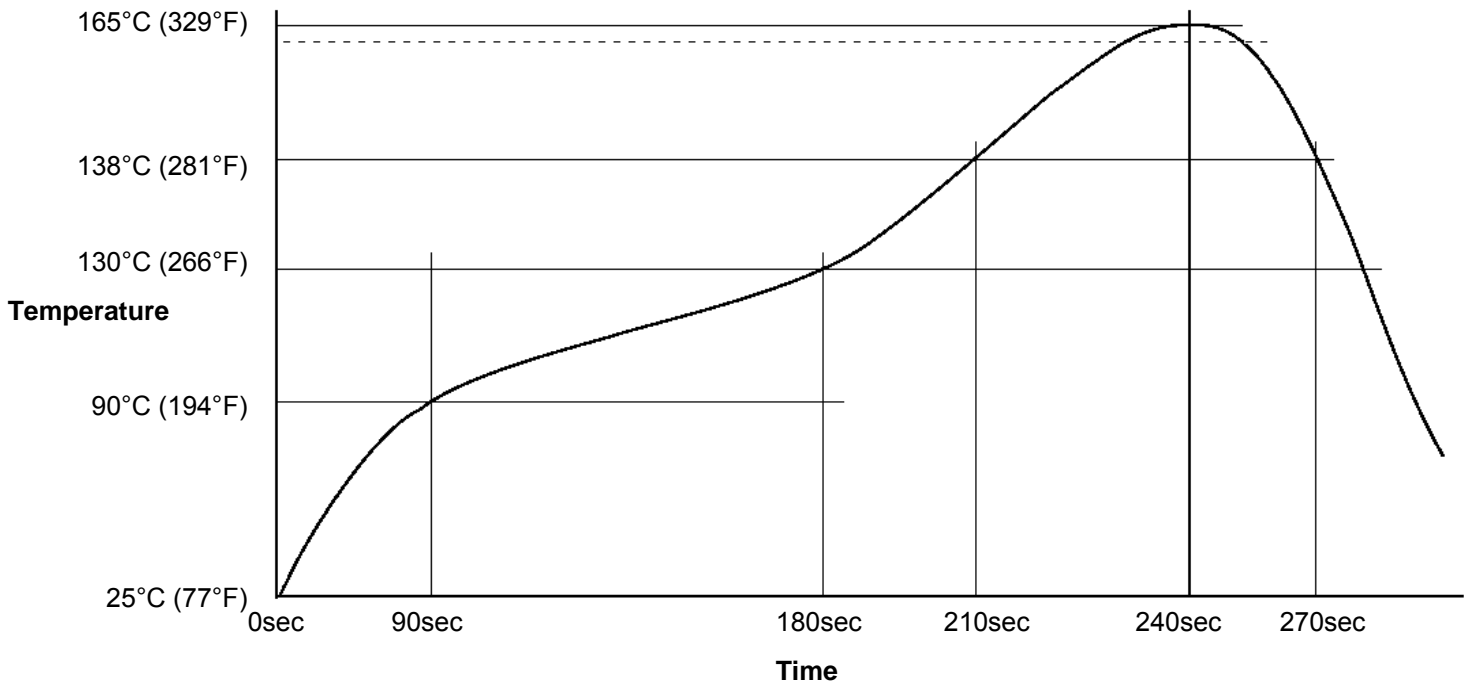

Test Results

Test J-STD-004 or other requirements as stated	Test Requirement	Result
Copper Mirror	IPC-TM-650: 2.3.32	L: No breakthrough
Corrosion	IPC-TM-650: 2.6.15	L: No corrosion
Quantitative Halides	IPC-TM-650: 2.3.28.1	L: <0.5%
Electrochemical Migration	IPC-TM-650: 2.6.14.1	L: <1 decade drop (No-clean)
Surface Insulation Resistance 85°C, 85% RH @ 168 Hours	IPC-TM-650: 2.6.3.7	L: ≥100MΩ (No-clean)
Tack Value	IPC-TM-650: 2.4.44	48g
Viscosity – Malcom @ 10 RPM/25°C (x10 ³ mPa/s)	IPC-TM-650: 2.4.34.4	Print: 125-180, Dispense: 90-130
Visual	IPC-TM-650: 3.4.2.5	Clear and free from precipitation
Conflict Minerals Compliance	Electronic Industry Citizenship Coalition (EICC)	Compliant
REACH Compliance	Articles 33 and 67 of Regulation (EC) No 1907/2006	Contains no substance >0.1% w/w that is listed as a SVHC or restricted for use in solder materials

Conforms to the following Industry Standards:

J-STD-004B, Amendment 1 (Solder Fluxes):	Yes
J-STD-005A (Solder Pastes):	Yes
J-STD-006C, Amendments 1 & 2 (Solder Alloys and Fluxed/Non-Fluxed Solders):	Yes
RoHS 2 Directive 2011/65/EU:	Yes

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com