



MICRO SWITCH
FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

IXE17

IXE17

PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
X 2
X 3
X 4

REPLACES

SR 11454

RELEASE NO.

CHECK

REVISIONS

A	CORR
MBF	5 DEC 62
B	SR 11454
HBW	6 FEB 64
C	C052067
21	CJH 82
D	CO 57328-A
WJM	15 APR 85
C	C094282
DLM	3 MAR 99

CHECK

23 NOV 62

23 NOV 62


CHECK

21 NOV 62

FORMTEK

FO-50376

DRAWN

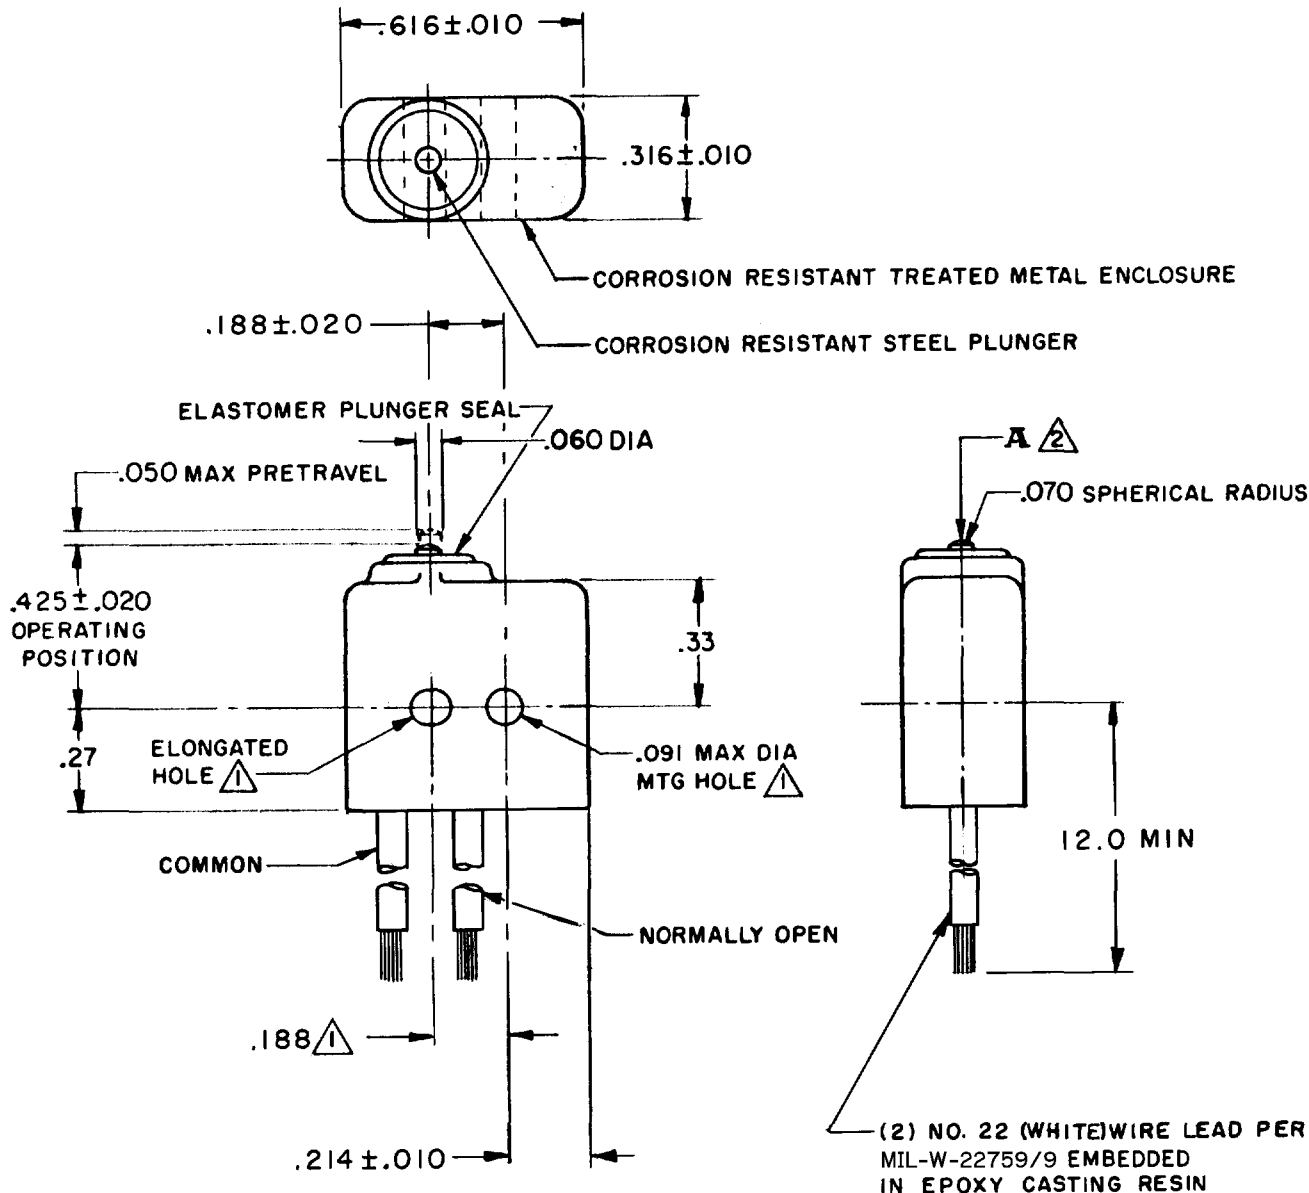

NOTE -

- 1 MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.188 \pm .002$ CENTERS
- 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 WEIGHT OF SWITCH ONLY IS $.16$ OZ MAX
WEIGHT OF SWITCH WITH WIRE LEADS IS $.55$ OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE 2 TO 1	
OPERATING FORCE — — — — — 5 - 17 OZ		CONTACT ARRANGEMENT S P N O		DO NOT SCALE PRINT	
RELEASE FORCE — — — — — 4 OZ MIN		28 VOLTS DC RATING		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	
RELEASE TRAVEL — — — — — .004 MIN		INDUCTIVE — — — — — SEA LEVEL — — — 4 AMP 50,000 FT — — — 2.5 AMP		ONE PLACE (.0) $\pm .030$	
DIFFERENTIAL TRAVEL — — — — .005 MAX		RESISTIVE — — — — — SEA LEVEL — — — 7 AMP 50,000 FT — — — 7 AMP		TWO PLACE (.00) $\pm .015$	
OVERTRAVEL — — — — — .004 MIN		MAXIMUM INRUSH — — — — — 24 AMP		THREE PLACE (.000) $\pm .001$	
				ANGLES $\pm$	
				WEIGHT $\pm$	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com