




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING **DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING** **DIMENSIONS IN METRIC - []**



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

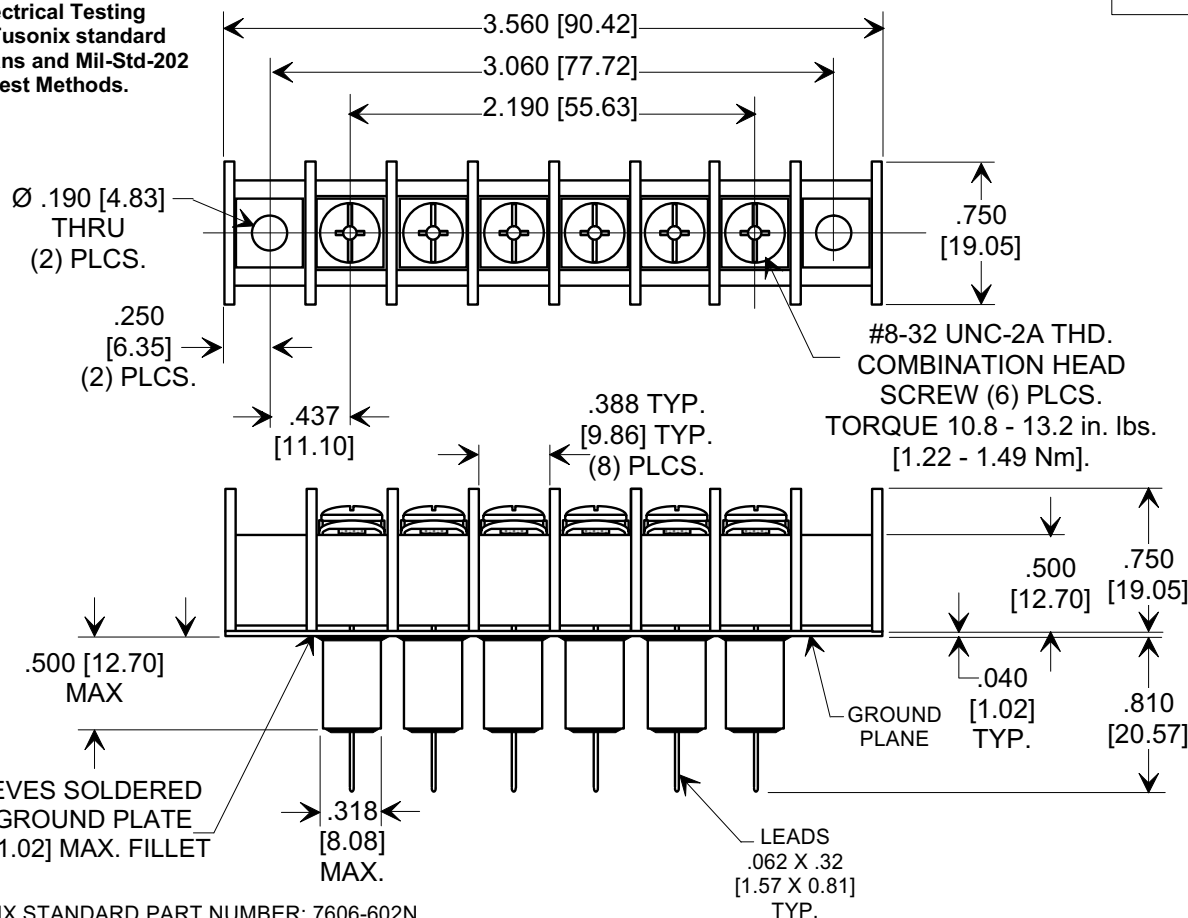

NOTES:

1. TUSONIX STANDARD PART NUMBER: 7606-602N
TUSONIX ROHS COMPLIANT PART NUMBER: 7606-602N LF.
CUSTOMER MUST SPECIFY STANDARD OR ROHS PART NUMBER WHEN ORDERING.
2. MAX. SOLDERING TEMPERATURE 500°F [260°C].
3. BLOCK MOUNTING: RECOMMENDED MOUNTING SCREWS (#8 PAN HEAD) TORQUE 4.5 - 5.5 in. lbs. [0.51 - 0.62 Nm].
4. MOLDED MATERIAL: HIGH TEMPERATURE THERMOPLASTIC (PBT) UL RATED 94 V-0.
5. RATED FOR DIRECT CURRENT APPLICATIONS ONLY.
6. TERMINAL BLOCK IS UL RECOGNIZED "FOR FIELD WIRING" (STANDARD 1059, GUIDE NO. XCFR2) (PENDING).
7. TERMINAL BLOCK TO COMPLY WITH TELCORDIA GR-63-CORE, ISSUE 2, PARAGRAPH 5.4.2 (EXCEPT SWEEP 5 Hz TO 200 Hz RANGE) WHEN TERMINAL SCREWS ARE PROPERLY TORQUED TO APPROPRIATE UL RECOGNIZED OR LISTED RING TERMINAL.
8. LEAD FINISH: MATTE TIN.
9. PLATE MATERIAL: .040" COPPER ALLOY, MATTE TIN FINISH.
10. PART MARKING: TRADEMARK, PART NUMBER, DATE CODE, AND UL RECOGNITION: WHITE INK. ROHS PART: GREEN INK DOT.

Cx (pF)	WORKING VOLTAGE -40°C TO +125°C	I _{DC}	D.W.V.	I.R. MIN.	TYPICAL NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			
					10 MHz	100 MHz	1 GHz	10 GHz
12,000/27,000	150 VDC	30 Amps	2121 VDC (60 SEC.)	10 G Ω	28	45	70	70

X-2015 Rev-0	REVISION RECORD	Original Release C.O. ECO-664	A	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± N/A 3 PLC. DECIMAL ± .030 [.076] ANGLES ± N/A	Title "C" FEED - THRU TERMINAL BLOCK 6 POSITION, UL RECOGNIZED	
					Drawn L.E. 04-15-09 Scale FULL	
				TUSONIX TUCSON, ARIZONA	Approved R.L. 04-15-09	
					A	7606-602N

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com