

2PB421-T

PAGE 1 OF 1

RELEASE NO. PR-8667

M

DRAWING
NUMBER

ISSUE
2

REVISIONS

A C095143
DLT
15 JUL 99

CHECK

CHECK

80

14 APR 80

C E B

CHECK

80

10 APR 80

C E B

CHECK




80

FORMTEK

FO-52848-A

DRAWN


G J W 10 APR 80

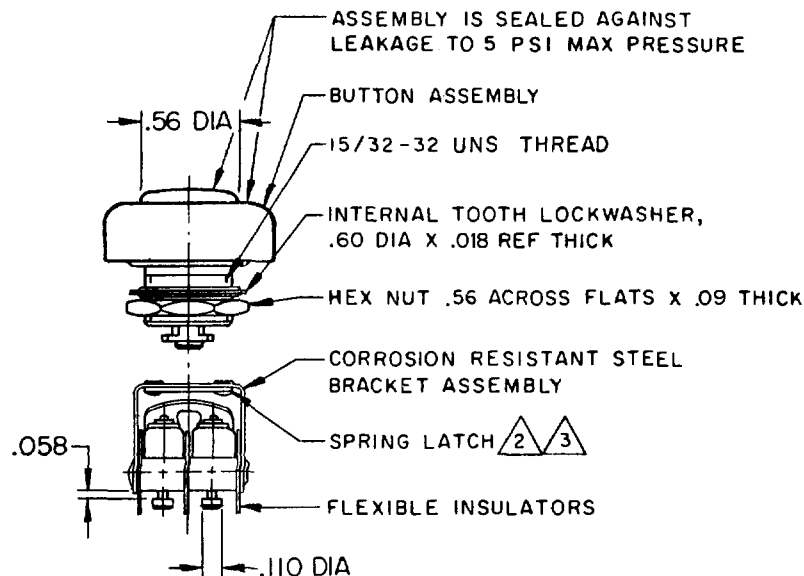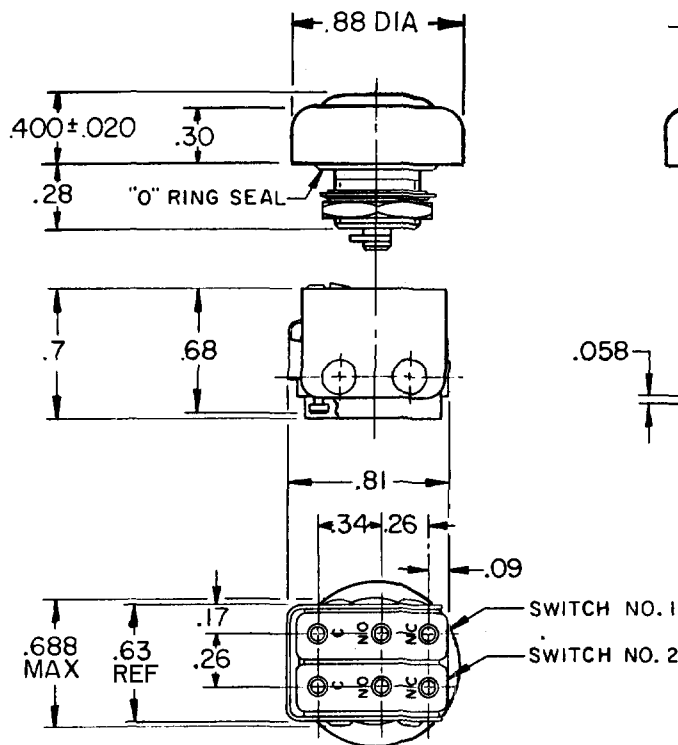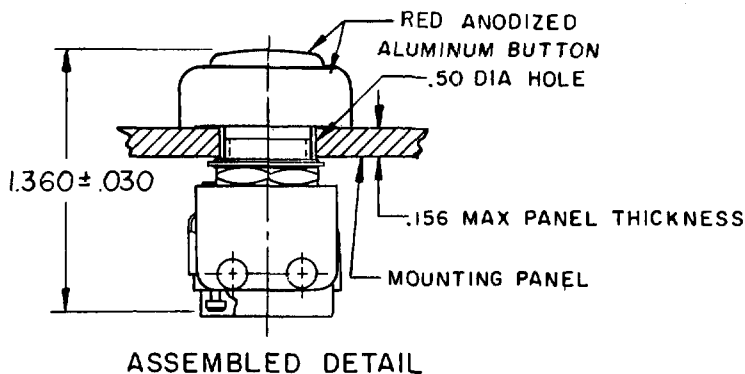

NOTES

- 1 - UNIT INCLUDES CATALOG LISTING "ISM" TYPE BASIC SWITCH
- 2 SPRING LATCH PERMITS ASSEMBLY AND DISASSEMBLY AS REQUIRED
- 3 "D" SHAPED HOLE IN SPRING LATCH PREVENTS ROTATION BETWEEN THE TWO PARTS
- 4 - ASSEMBLY IS COMPLETED AFTER INSTALLING BUTTON TO PANEL
- 5 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 6 - TERMINALS ARE PLATED FOR SOLDERING
- 7 - BASIC SWITCHES HAVE 24K SOLID GOLD CONTACTS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS

OPERATING FORCE --- 2 1/2 LB APPROX
PLUNGER TRAVEL --- .062 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

30 VOLTS DC RATING

INDUCTIVE --- SEA LEVEL --- 1/2 AMP
50,000 FT --- 1/2 AMP
RESISTIVE --- SEA LEVEL --- 1 AMP
50,000 FT --- 1 AMP
MAXIMUM INRUSH --- 2 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DIM.	TOL.	DIM.	TOL.
in	mm	in	mm
NO PLACES	X	1/64	0.015
ONE PLACE	X.X	0.015	0.015
TWO PLACES	X.XX	0.0015	0.0015
THREE PLACES	X.XXX	0.00015	0.00015
ANGLES			

SYMMETRIC

SEE CUSTOMER

DESIGN UNITS

WEIGHT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com